

Topological-Insulator Heterophase Gate Stacks for Transistor Electrostatics

Hoon Hahn Yoon

hoonhahnyoon@gist.ac.kr

Gwangju Institute of Science and Technology <https://orcid.org/0000-0002-4081-3343>

Minuk Song

Gwangju Institute of Science and Technology <https://orcid.org/0009-0003-1821-9684>

Jiwan Kim

Ulsan National Institute of Science and Technology <https://orcid.org/0009-0000-4617-7774>

MD Gius Uddin

Aalto University <https://orcid.org/0000-0001-8917-7627>

Wonseok Kim

Gwangju Institute of Science and Technology

Jihun Park

Gwangju Institute of Science and Technology

Han Uk Lee

Sungkyunkwan University

Dong Won Jeon

Sungkyunkwan University

Dohyung Lee

Korea Research Institute of Chemical Technology <https://orcid.org/0009-0009-2837-9087>

Lide Yao

Aalto University <https://orcid.org/0000-0003-2292-9219>

Jouko Lahtinen

Aalto University <https://orcid.org/0000-0002-1192-9945>

Gyunghyun Jang

Gwangju Institute of Science and Technology <https://orcid.org/0009-0007-2864-1810>

Soohyun Min

Department of Semiconductor Engineering, Gwangju Institute of Science and Technology
<https://orcid.org/0009-0003-8664-5693>

Yonas Tsegaye Megra

Gwangju Institute of Science and Technology <https://orcid.org/0000-0002-0386-8193>

Xiaoqi Cui

Aalto University <https://orcid.org/0000-0002-0921-318X>

Seungwoo Choi

Yonsei University

Yunyun Dai

Beijing Institute of Technology <https://orcid.org/0000-0002-1186-1864>

Sang Hoon Chae

School of Electrical and Electronic Engineering, School of Materials Science and Engineering, Nanyang Technological University <https://orcid.org/0000-0002-9612-5371>

Keun Su Kim

Yonsei University <https://orcid.org/0000-0002-7033-1177>

Dong-Ho Kang

Gwangju Institute of Science and Technology <https://orcid.org/0000-0001-7269-5989>

Hyeon-Jin Shin

Gwangju Institute of Science and Technology (GIST) <https://orcid.org/0000-0002-6992-6341>

Wooseok Song

Korea Research Institute of Chemical Technology <https://orcid.org/0000-0002-0487-2055>

Seth Ariel Tongay

Arizona State University <https://orcid.org/0000-0001-8294-984X>

Chul-Ho Lee

Seoul National University <https://orcid.org/0000-0003-1570-8688>

Manish Chhowalla

University of Cambridge <https://orcid.org/0000-0002-8183-4044>

Sung Beom Cho

sungcho@skku.edu

Sungkyunkwan University <https://orcid.org/0000-0002-3151-0113>

Zhipei Sun

zhipei.sun@aalto.fi

Aalto University <https://orcid.org/0000-0002-9771-5293>

Kibog Park

kibogpark@unist.ac.kr

Ulsan National Institute of Science and Technology <https://orcid.org/0000-0003-4086-7365>

Physical Sciences - Article

Keywords:

Posted Date: October 20th, 2026

DOI: <https://doi.org/10.21203/rs.3.rs-11089004/v2>

License: © ⓘ This work is licensed under a Creative Commons Attribution 4.0 International License.
[Read Full License](#)

Additional Declarations: The authors declare no competing interests.

Topological-Insulator Heterophase Gate Stacks for Transistor Electrostatics

Minuk Song^{1†}, Jiwan Kim^{2†}, Md Gius Uddin^{3,4†}, Wonseok Kim^{1†}, Jihun Park¹,
Han Uk Lee⁵, Dong Won Jeon⁵, Dohyung Lee^{5,6}, Lide Yao⁷, Jouko Lahtinen⁸,
Gyunghyun Jang¹, Soohyun Min¹, Yonas Tsegaye Megra¹, Xiaoqi Cui³,
Seungwoo Choi⁹, Yunyun Dai¹⁰, Sang Hoon Chae¹¹, Keun Su Kim⁹,
Dong-Ho Kang¹, Hyeon-Jin Shin¹, Wooseok Song^{6,12}, Seth Ariel Tongay¹³,
Chul-Ho Lee¹⁴, Manish Chhowalla¹⁵, Sung Beom Cho^{5*}, Zhipei Sun^{3*},
Kibog Park^{2*}, Hoon Hahn Yoon^{1*}

¹Department of Semiconductor Engineering, Gwangju Institute of Science and Technology, Gwangju, 61005, Republic of Korea.

²Department of Physics, Ulsan National Institute of Science and Technology, Ulsan, 44919, Republic of Korea.

³Department of Electronics and Nanoengineering, Aalto University, Espoo, 02150, Finland.

⁴VTT Technical Research Centre of Finland Ltd., Espoo, 02150, Finland.

⁵School of Advanced Materials Science and Engineering, Sungkyunkwan University, Suwon, 16419, Republic of Korea.

⁶Thin Film Materials Research Center, Korea Research Institute of Chemical Technology, Daejeon, 34114, Republic of Korea.

⁷OtaNano-Nanomicroscopy Center, Aalto University, Espoo, 02150, Finland.

⁸Department of Applied Physics, Aalto University, Espoo, 02150, Finland.

⁹Department of Physics, Yonsei University, Seoul, 03722, Republic of Korea.

¹⁰School of Interdisciplinary Science, Beijing Institute of Technology, Beijing, 100081, China.

¹¹School of Electrical and Electronic Engineering, Nanyang Technological University, Singapore, 639798, Singapore.

¹²School of Electronic and Electrical Engineering, Sungkyunkwan University, Suwon, 16419, Republic of Korea.

¹³Department of Materials Science and Engineering, School for Engineering of Matter, Transport and Energy, Arizona State University, Tempe, AZ 85287, United States.

¹⁴Department of Electrical and Computer Engineering, Seoul National University, Seoul, 08826, Republic of Korea.

¹⁵Department of Materials Science & Metallurgy, University of Cambridge, Cambridge, CB3 0FA, United Kingdom.

*Corresponding author(s). E-mail(s): sungcho@skku.edu; zhipei.sun@aalto.fi; kibogpark@unist.ac.kr; hoonhahnnyoon@gist.ac.kr;

[†]These authors contributed equally to this work.

Abstract

Conventional gate-stack scaling reduces dielectric thickness and increases permittivity while largely treating the position and electronic character of the gate-side screening boundary as fixed. Here we show that this boundary can be engineered by converting the surface of the topological insulator Bi_2Se_3 into insulating high- κ BiF_3 . Position-resolved calculations reveal a gap-opened immediate amorphous- BiF_3 /crystalline- Bi_2Se_3 interface and a reconstructed gap-closed Bi_2Se_3 -derived state in the adjacent subinterface layer, accompanied by a localized interfacial dipole. Capacitor measurements independently resolve a finite series response consistent with electronic compressibility at this boundary; this response lowers the nominal stack capacitance. Despite this capacitance penalty, MoS_2 transistors with closely matched BiF_3 thicknesses and a common $\text{BiF}_3/\text{MoS}_2$ channel-side material interface exhibit near-thermionic-limit switching, negligible hysteresis and substantially weaker subthreshold drain-bias dependence than BiF_3 -only controls. These results identify the position and electronic character of the gate-side screening boundary as additional design variables for transistor electrostatics beyond nominal dielectric capacitance.

1 Introduction

Gate stacks for low-voltage transistors must provide effective channel control while maintaining dielectric isolation and a stable electrical response. Gate-stack scaling is conventionally described by dielectric thickness and permittivity, yet the applied potential is partitioned across the bulk insulator and finite screening and interfacial responses at conductor/dielectric and dielectric/semiconductor boundaries. As the equivalent oxide thickness (*EOT*) approaches the subnanometre regime, contributions arising from electrode screening, interfacial bonding, polarization, and chemical or structural reconstruction need not scale with the physical dielectric thickness and can therefore constitute an increasing fraction of the total electrostatic response [1–5]. Relating gate-stack capacitance to subthreshold switching and drain-bias sensitivity therefore requires consideration of the electronic boundaries at which screening charge is established, in addition to the properties of the bulk dielectric.

Two-dimensional (2D) van der Waals (vdW) semiconductors provide a stringent setting in which to expose this distinction. Their atomically thin bodies suppress semiconductor-body electrostatic length scales, whereas their chemically inert surfaces make conventional three-dimensional high- κ integration difficult and susceptible to interfacial disorder, fixed charge, trap states, and carrier scattering [6–8]. Hexagonal boron nitride encapsulation, seeded atomic-layer deposition, native dielectrics, and emerging vdW high- κ materials have therefore focused primarily on improving the dielectric and its interface with the semiconductor [9–14]. These advances leave a complementary question largely open: whether the gate-side screening boundary itself can be deliberately created, displaced, and electronically reconstructed independently of the semiconductor-side interface.

Topological insulators provide a route to this form of boundary engineering. Their bulk electronic structure supports boundary-localized states whose spatial distribution can be displaced or reconstructed when the surface environment is modified [15–18]. Such states have predominantly been considered as transport channels [19, 20]. By contrast, their use as an electrostatically active boundary of a gate stack remains largely unexplored. Because the surface of Bi_2Se_3 can be selectively converted into wide-gap BiF_3 [21], surface conversion provides a means to separate the chemical surface from the electronically active Bi_2Se_3 -derived boundary beneath it. This possibility motivates a gate architecture in which the location of screening is an engineered property of the heterophase material itself rather than a fixed consequence of depositing a metal electrode onto a dielectric.

Here we investigate this gate-side boundary condition using a topological-insulator heterophase gate stack (TIHGS) formed by selective conversion of Bi_2Se_3 . Fluorination creates an insulating amorphous BiF_3 phase while retaining electrically conducting crystalline Bi_2Se_3 underneath. Position-resolved electronic-structure calculations show that the immediate heterophase interface becomes gap-opened whereas an electronically active, gap-closed Bi_2Se_3 -derived state is reconstructed in the adjacent subinterface layer; a localized interface dipole accompanies this reconstruction. Independent capacitor measurements resolve a finite series response consistent with electronic compressibility at the buried boundary, lowering the nominal stack capacitance. Nevertheless, TIHGS-gated MoS_2 transistors exhibit near-thermionic-limit switching, negligible hysteresis and reduced drain-bias sensitivity relative to a

BiF₃-only control with closely matched dielectric thickness and a common channel-side material interface. Together, these measurements connect conversion-induced electronic reconstruction, gate-stack response and transistor characteristics, identifying the gate-side screening boundary as a design parameter complementary to dielectric thickness and permittivity.

2 Results and Discussion

Figure 1 contrasts conventional gate-stack electrostatics with screening-boundary relocation in the TIHGS. In a conventional high- κ stack, the gate-side interfacial capacitance ($C_{d,g}$), dielectric capacitance, channel-side interfacial capacitance ($C_{d,ch}$), and, for a 2D channel, the van der Waals-gap capacitance (C_{vdW}) contribute in series. Of these terms, $C_{d,g}$ is central to the present work: it represents the finite electrostatic response of the gate-electrode/dielectric boundary arising from electrode screening and interface-specific electronic, bonding, polarization, and chemical or structural effects. Unlike the bulk dielectric capacitance, which increases as the physical dielectric thickness is reduced, this gate-side boundary contribution need not scale proportionally and can therefore account for an increasing fraction of the total electrostatic response at small *EOT* [1–5]. By comparison, $C_{d,ch}$ denotes the local dielectric/semiconductor interfacial response, and C_{vdW} denotes the geometric contribution associated with the vdW separation at a 2D semiconductor interface. The bias-dependent semiconductor-body response is outside the gate-stack contribution defined here and is omitted from Fig. 1 for clarity. The resulting design question is therefore whether the gate-side screening boundary represented by $C_{d,g}$ must remain fixed at the external metal/dielectric interface.

In the TIHGS, selective surface conversion creates insulating amorphous BiF₃ (a-BiF₃) while residual crystalline Bi₂Se₃ (c-Bi₂Se₃) remains electrically coupled to the gate electrode. This architecture displaces the gate-side electrostatic termination from a conventional externally formed metal/dielectric boundary to a heterophase-induced buried electronic boundary. Importantly, the chemical conversion front and the electronic screening boundary need not coincide atomically. The schematic in Fig. 1d distinguishes the gap-opened a-BiF₃/c-Bi₂Se₃ interface from a reconstructed gap-closed electronic state in the adjacent c-Bi₂Se₃ subinterface layer. We therefore use “buried screening boundary” to denote this electronically active heterophase-associated boundary region rather than an ideal atomically sharp conductor/dielectric

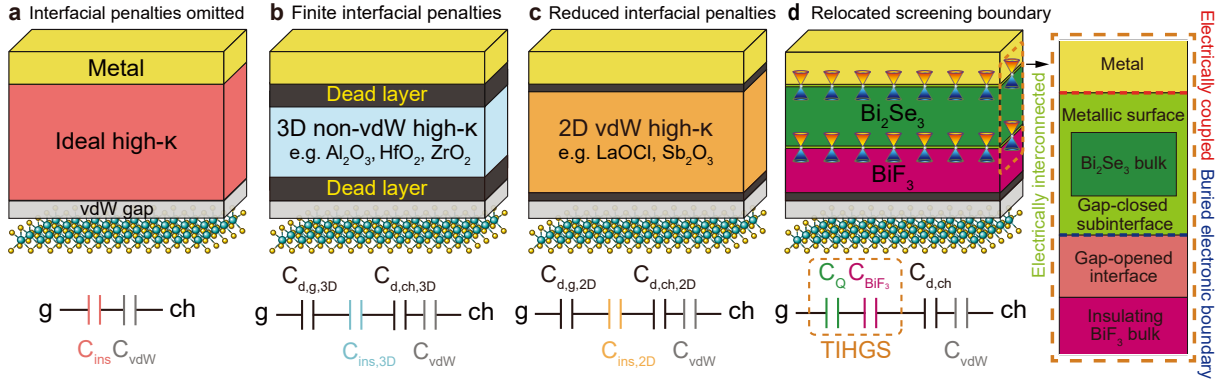


Fig. 1 Screening-boundary relocation in a topological-insulator heterophase gate stack (TIHGS). a–d, Schematics and reduced equivalent-capacitance models for gate stacks with a two-dimensional (2D) van der Waals (vdW) channel. The terminals g and ch denote the gate and channel; the bias-dependent semiconductor-body capacitance is omitted. C_{ins} , C_{vdW} , $C_{d,g}$ and $C_{d,ch}$ denote the insulator, vdW-gap, effective gate-side interfacial and effective channel-side interfacial capacitances, respectively. **a**, Idealized stack retaining C_{ins} and C_{vdW} while omitting the gate-side and channel-side interfacial-capacitance penalties. **b,c**, Three-dimensional (3D) non-vdW (**b**) and 2D vdW (**c**) high- κ dielectrics retaining finite interfacial contributions in series with the insulator and vdW-gap capacitances. The 3D and 2D subscripts identify the dielectric class. Interfacial layers and relative penalties are schematic. **d**, Surface conversion of Bi₂Se₃ forms insulating BiF₃ facing the channel, while residual conducting Bi₂Se₃ remains electrically coupled to the gate electrode. The right-hand schematic distinguishes the gap-opened amorphous-BiF₃/crystalline-Bi₂Se₃ chemical interface from the adjacent gap-closed Bi₂Se₃-derived subinterface electronic boundary. C_Q represents the finite effective electronic-compressibility response of this buried boundary, in series with the BiF₃ dielectric capacitance (C_{BiF_3}), $C_{d,ch}$ and C_{vdW} . Cone symbols schematically represent Bi₂Se₃-derived Dirac-like boundary states. The dashed box in the equivalent circuit identifies the TIHGS element comprising C_Q and C_{BiF_3} in series.

plane. In the reduced series-capacitance model, its finite electronic response is represented as

$$\frac{1}{C_{g,\text{TIHGS}}} = \frac{1}{C_{\text{TIHGS}}} + \frac{1}{C_{\text{d,ch}}} + \frac{1}{C_{\text{vdW}}} = \frac{1}{C_Q} + \frac{1}{C_{\text{BiF}_3}} + \frac{1}{C_{\text{d,ch}}} + \frac{1}{C_{\text{vdW}}},$$

where C_Q denotes the effective electronic-compressibility response associated with the buried electronic boundary. Here, $C_{g,\text{TIHGS}}$ includes the channel-side interfacial and vdW-gap contributions represented in Fig. 1, whereas C_{TIHGS} used below denotes the BiF_3 /buried-boundary element, with $C_{\text{TIHGS}}^{-1} = C_{\text{BiF}_3}^{-1} + C_Q^{-1}$. The architectural change $C_{\text{d,g}} \rightarrow C_Q$ replaces one finite gate-side response with another whose physical origin, position and electronic character are set by the conversion-generated heterophase. Screening-boundary engineering thus concerns where and how the gate-side electronic response is established, alongside the thickness and permittivity of the dielectric. Supplementary Note 1 develops this reduced electrostatic description.

We established the conversion-defined geometry independently through structural and chemical characterization. Cross-sectional transmission electron microscopy (TEM) of fluorinated structures shows an amorphous converted BiF_3 region above residual crystalline Bi_2Se_3 , with the conversion depth approaching a self-limited value of $\sim 40\text{--}43$ nm. High-angle annular dark-field scanning transmission electron microscopy (HAADF-STEM) combined with energy-dispersive X-ray spectroscopy (EDS) further resolves the corresponding compositional stratification (Extended Data Fig. 1). Atomic force microscopy (AFM),

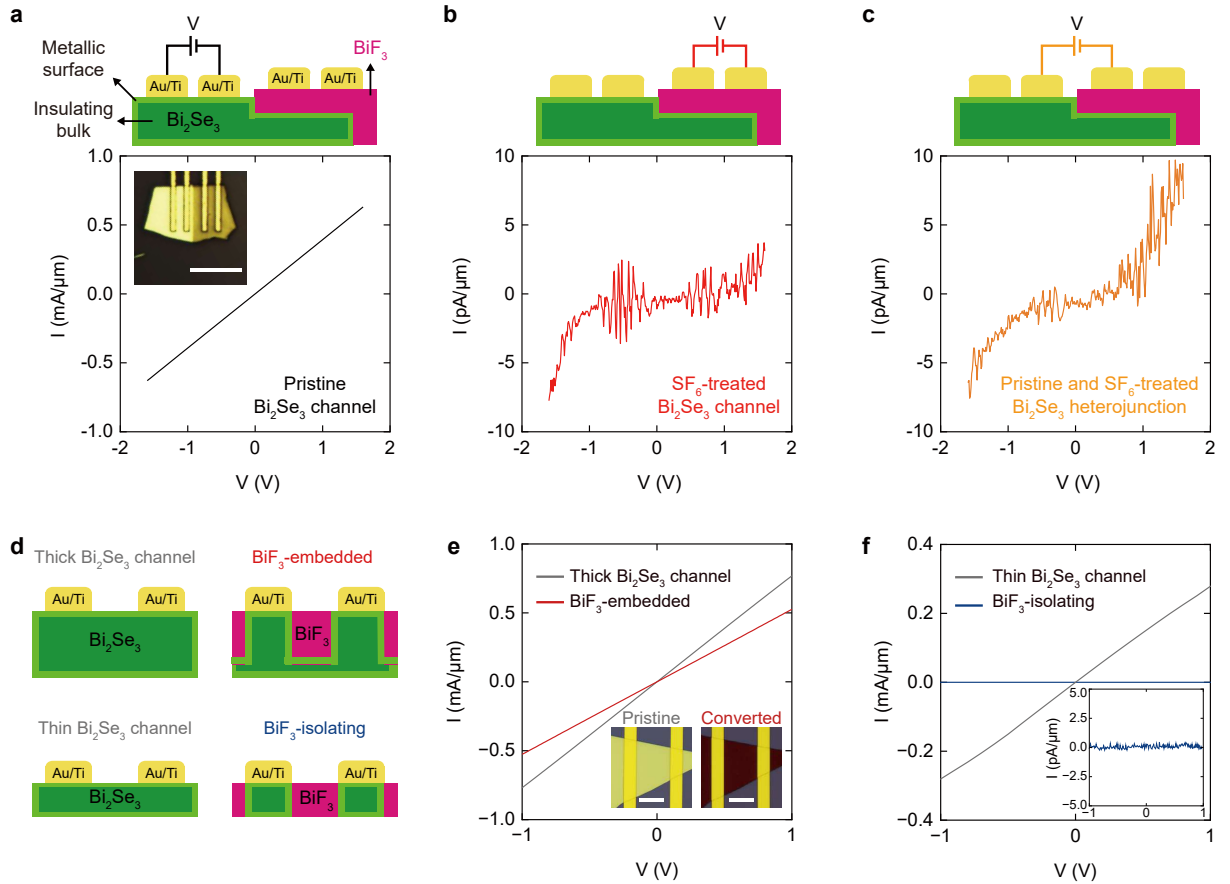


Fig. 2 Electrical isolation and buried conduction in the topological-insulator heterophase gate stack. a–c, Device schematics (top) and corresponding current–voltage (I - V) characteristics (bottom) of a, pristine Bi_2Se_3 ; b, SF_6 -converted Bi_2Se_3 ; and c, a lateral pristine/converted heterojunction. The converted region suppresses conduction from the $\text{mA } \mu\text{m}^{-1}$ to the $\text{pA } \mu\text{m}^{-1}$ range. Scale bar in a, $10 \mu\text{m}$. d, Schematics illustrating partial surface conversion of a Bi_2Se_3 flake thicker than the conversion depth and complete conversion of a thinner flake. e, I - V characteristics of a thick Bi_2Se_3 channel before and after partial surface conversion, showing persistent conduction through the residual Bi_2Se_3 . Insets, corresponding optical micrographs. Scale bars, $20 \mu\text{m}$. f, I - V characteristics of a thin Bi_2Se_3 channel before and after complete conversion, showing electrical isolation after fluorination. Inset, current on the pA scale after conversion.

Raman spectroscopy and X-ray photoelectron spectroscopy (XPS) independently support spatially selective chemical conversion rather than additive deposition: for a 5-s treatment, the ~ 3.3 -nm surface-height increase measured by AFM is substantially smaller than the ~ 13.1 -nm converted-layer thickness measured by TEM, consistent with conversion and expansion of the parent Bi_2Se_3 , while XPS directly reveals Bi–F bonding (Extended Data Fig. 2). The conversion-depth dependence and its relation to fluorine penetration are discussed in Supplementary Note 2.

A functional TIHGS requires two conditions to coexist: the converted surface phase must provide dielectric isolation, while the residual Bi_2Se_3 beneath it must remain electrically conducting. A pristine Bi_2Se_3 channel carries current in the $\text{mA } \mu\text{m}^{-1}$ range, whereas a fully converted channel and a lateral pristine/converted junction are suppressed to the $\text{pA } \mu\text{m}^{-1}$ range (Fig. 2a–c). The converted region therefore acts as an electrically isolating barrier rather than simply a resistive modification of Bi_2Se_3 . Comparable electrical isolation was not reproduced by O_2 -plasma treatment, under which Bi_2Se_3 remained conductive even after prolonged exposure (Extended Data Fig. 3a–h).

The complementary requirement of buried conduction is established by conversion-depth-dependent transport. Bi_2Se_3 flakes thicker than the self-limited conversion depth remain conductive after partial fluorination, whereas thinner flakes become electrically isolated after complete conversion (Fig. 2d–f). Quantitative transfer-length measurements across a locally converted region further show nearly unchanged contact resistance (~ 157 versus $\sim 161 \, \Omega$) together with a ~ 3.5 -fold increase in sheet resistance, consistent with an electrically continuous Bi_2Se_3 pathway persisting beneath the insulating converted region (Extended Data Fig. 3i–m). These measurements establish the vertically stratified insulating- BiF_3 /conducting- Bi_2Se_3 configuration required for the buried gate-side screening boundary.

The electrically stratified $\text{BiF}_3/\text{Bi}_2\text{Se}_3$ structure raises a central microscopic question: where does the electronically active boundary reside after surface conversion? Pristine c- Bi_2Se_3 exhibits a Dirac-like surface-state dispersion within a calculated 0.31-eV bulk gap, with the Dirac-point energy (E_D) located ~ 0.043 eV below the Fermi level (E_F) and finite spectral weight extending to E_F (Fig. 3a,b). Formation of the a- BiF_3 /c- Bi_2Se_3 heterophase produces a spatially resolved reconstruction. The immediate heterophase interface becomes gap-opened, with an interface-projected gap of ~ 0.72 eV, whereas the adjacent c- Bi_2Se_3 subinterface QL develops a reconstructed gap-closed Bi_2Se_3 -derived Dirac-like feature centred ~ 0.146 eV below E_F and retaining finite near- E_F spectral weight (Fig. 3c,d). The opposite surface remains pristine-like. The direct microscopic result is therefore a spatial separation between the gap-opened chemical interface and an electronically active gap-closed subinterface boundary, rather than simple survival of the original Bi_2Se_3 surface state.

The calculated dipole-moment profile is strongly localized near the a- BiF_3 /c- Bi_2Se_3 heterophase interface (Fig. 3e), identifying interfacial charge redistribution accompanying surface conversion. Together, the localized dipole and position-resolved band reconstruction show that conversion reorganizes the Bi_2Se_3 -derived electronic boundary while creating an insulating chemical interface. The resulting spatial distinction between the chemical conversion front and the gap-closed subinterface state provides the microscopic basis for the buried-boundary picture developed in Supplementary Note 3. Its electronic compressibility is examined independently below through capacitance measurements. Complementary calculations confirm that amorphous BiF_3 remains insulating, with a calculated band gap of 3.94 eV; the crystalline and amorphous BiF_3 electronic structures and calculated dielectric properties are summarized in Extended Data Fig. 4 and Extended Data Table 1.

Capacitor measurements provide an independent electrostatic test of the buried electronic boundary. Crystalline TIHGS-43 (cN) MIM capacitors containing a ~ 43 -nm-thick converted BiF_3 layer exhibit nearly bias-independent capacitance and a mean BiF_3 -thickness-normalized effective relative permittivity $\varepsilon_{\text{eff, TIHGS}} = 16.50$ (Fig. 3f,g). Polycrystalline TIHGS-13 (p20) and TIHGS-43 (p50) similarly yield $\varepsilon_{\text{eff, TIHGS}} \approx 15$ –16, whereas the fully converted BiF_3 -only reference yields $\varepsilon_{\text{BiF}_3} = 28.65$ on average. The lower TIHGS capacitance is represented by

$$\frac{1}{C_{\text{TIHGS}}} = \frac{1}{C_Q} + \frac{1}{C_{\text{BiF}_3}},$$

where the independently measured BiF_3 reference gives effective C_Q values of ~ 2.52 and $\sim 0.631 \, \mu\text{F cm}^{-2}$ for TIHGS-13 (p20) and TIHGS-43 (p50), respectively (Supplementary Note 4). Their geometry dependence shows that C_Q is an effective interfacial response rather than a universal material constant. Most importantly, the finite C_Q is a series response that reduces the measured stack capacitance. Combined

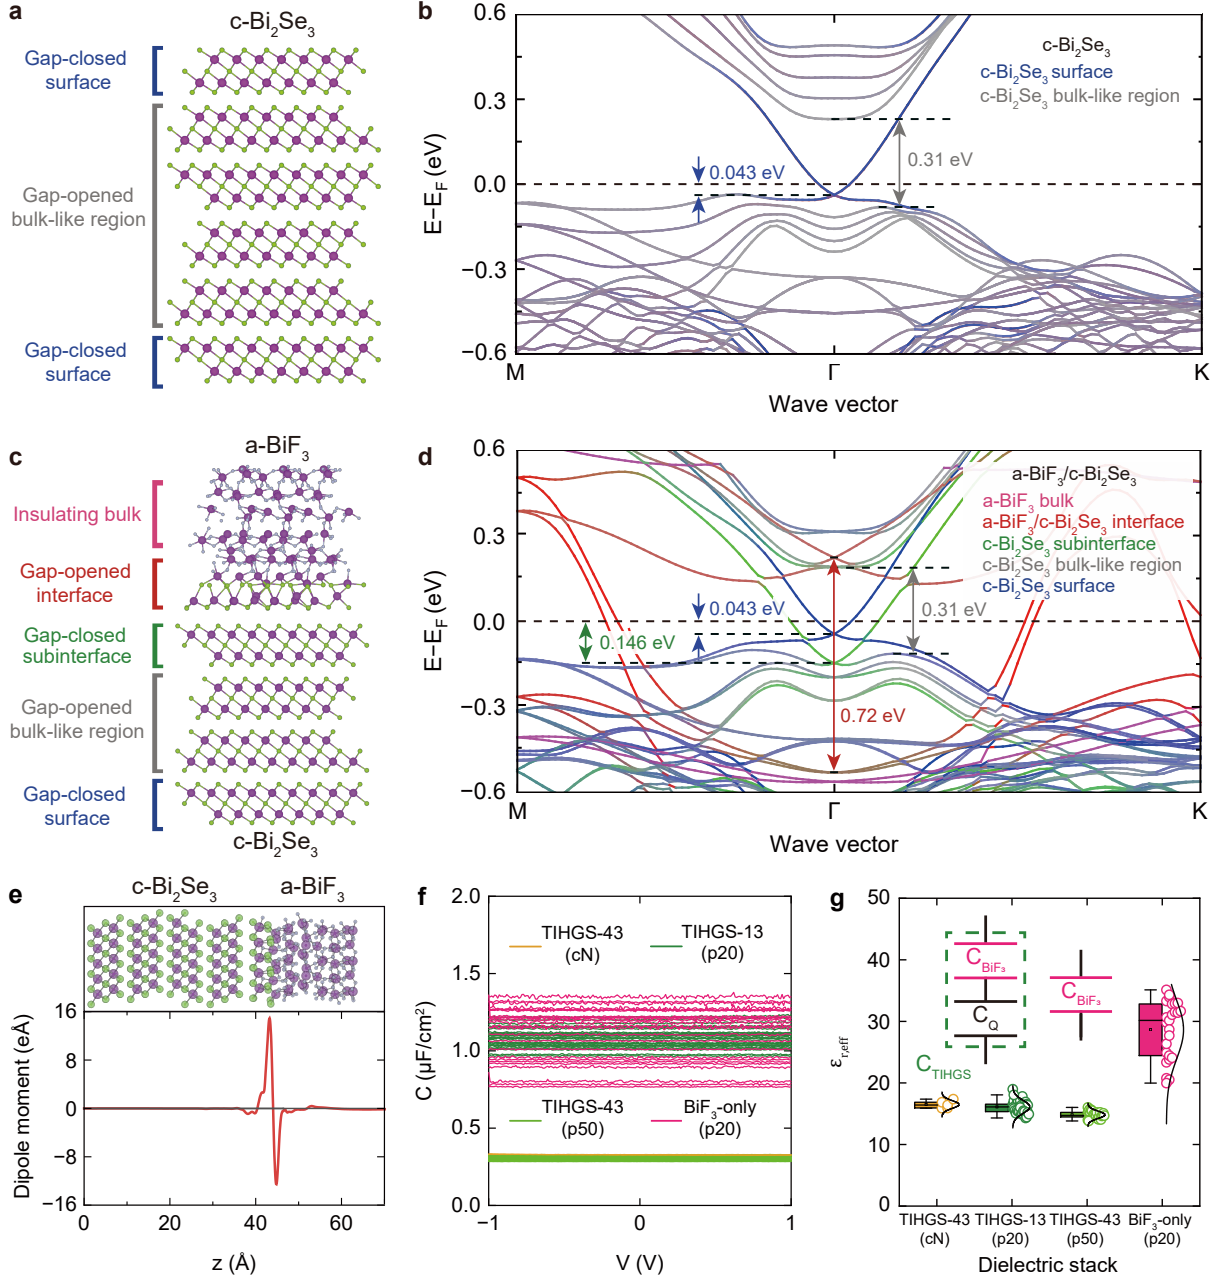


Fig. 3 Electronic reconstruction and electrostatic response of the buried TIHGS boundary. **a**, Six-quintuple-layer (QL) crystalline Bi_2Se_3 ($c\text{-Bi}_2\text{Se}_3$) (0001) slab used to model the pristine surface, with gap-closed outer QLs and a gap-opened bulk-like interior. **b**, Surface-weighted electronic band structure of **a**. Bulk-projected states are grey and surface-weighted states blue; the calculated bulk gap is 0.31 eV and the Dirac point lies ~ 0.043 eV below the Fermi level (E_F). **c**, Structural model of amorphous BiF_3 ($a\text{-BiF}_3$) interfaced with four-QL $c\text{-Bi}_2\text{Se}_3$, showing the immediate heterophase interface, adjacent subinterface QL, bulk-like region, and opposite surface. **d**, Position-resolved electronic structure of **c**. The immediate interface is gap-opened by ~ 0.72 eV, whereas the adjacent subinterface QL exhibits a reconstructed gap-closed Bi_2Se_3 -derived Dirac-like feature centred ~ 0.146 eV below E_F with finite near- E_F spectral weight. The opposite surface remains pristine-like. **e**, Calculated out-of-plane dipole-moment profile, showing a response localized near the heterophase interface. **f**, Capacitance-voltage (C - V) characteristics of BiF_3 -only (p20), TIHGS-13 (p20), TIHGS-43 (p50) and TIHGS-43 (cN) MIM capacitors ($n = 25, 33, 24$ and 5 , respectively). TIHGS-13 and TIHGS-43 contain ~ 13 - and ~ 43 -nm converted BiF_3 ; p20 and p50 denote nominal starting polycrystalline Bi_2Se_3 thicknesses, and cN crystalline Bi_2Se_3 with nominal starting thickness N . **g**, Distributions of ϵ_{BiF_3} and the BiF_3 -thickness-normalized $\epsilon_{\text{eff, TIHGS}}$. Inset, series-capacitance representation of C_{BiF_3} and effective interfacial quantum capacitance C_Q . Boxes indicate the interquartile range, with centre lines denoting the median, and individual symbols represent separate capacitors.

with the independently calculated near- E_F subinterface spectral weight, this finite electronic response provides mutually consistent microscopic and electrostatic evidence for an electronically compressible buried boundary. The weak dependence of $\varepsilon_{\text{eff, TIHGS}}$ on the nominal starting crystalline Bi_2Se_3 thickness at a nearly fixed converted BiF_3 thickness further disfavors a dominant bulk contribution (Extended Data Fig. 5f). The broader dielectric-property context is shown in Extended Data Fig. 5g.

For this boundary architecture to function as a gate stack, the converted BiF_3 phase must also retain sufficient electrical isolation. For positive capacitor biases up to approximately 0.5 V, the TIHGS MIM current density remains below $10^{-2} \text{ A cm}^{-2}$. The transistor measurements separately resolve the drain current above the gate-leakage level during turn-on, whereas the deepest off-state currents approach the leakage and measurement-noise floor. At higher fields, the MIM leakage characteristics evolve from field-assisted emission towards Fowler–Nordheim tunnelling. The localized dipole in Fig. 3e provides microscopic evidence of interfacial charge redistribution, whereas Extended Data Fig. 6 distinguishes the measured leakage regimes and the vacuum-referenced, contact-equilibrated and high-field band-alignment configurations. The complete transport analysis and its limitations are discussed in Supplementary Note 5.

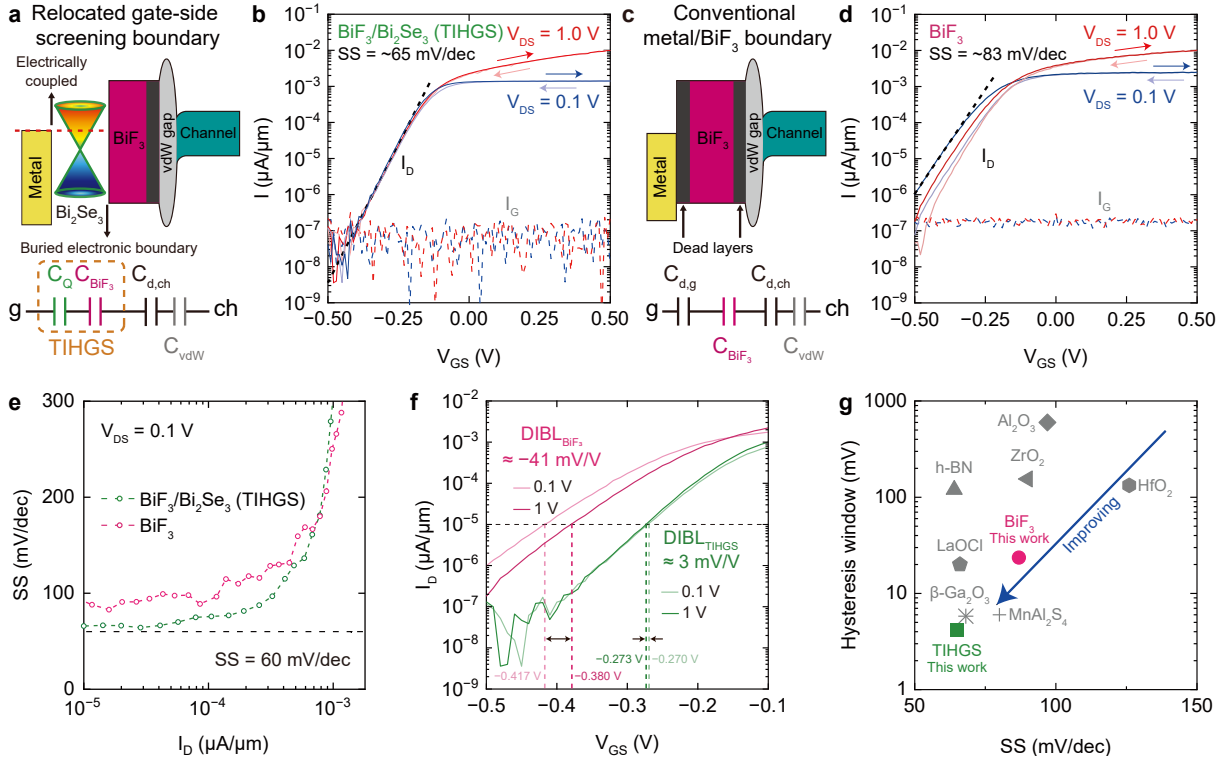


Fig. 4 Enhanced electrostatic control in TIHGS-gated MoS_2 transistors. **a,c**, Schematics and reduced equivalent-capacitance models of TIHGS-gated (**a**) and BiF_3 -only-gated (**c**) MoS_2 field-effect transistors (FETs). Capacitance symbols follow the definitions in Fig. 1. In **a**, residual Bi_2Se_3 remains electrically coupled to the gate electrode, and C_Q represents the effective electronic-compressibility response of the buried electronic boundary in the Bi_2Se_3 subinterface region. The dashed circuit box identifies the TIHGS element comprising C_Q and C_{BiF_3} in series. In **c**, $C_{\text{d,g}}$ represents the conventional metal/ BiF_3 interfacial response. Both models retain the BiF_3 dielectric and channel-side contributions; the regions labelled “Dead layers” schematically represent effective interfacial responses. The physical BiF_3 thicknesses are closely matched at $\sim 43 \text{ nm}$ in both devices. **b,d**, Forward and reverse transfer characteristics of representative TIHGS-gated (**b**) and BiF_3 -gated (**d**) devices. The TIHGS-gated device exhibits a minimum subthreshold swing (SS) of $\sim 65 \text{ mV dec}^{-1}$ and negligible hysteresis, compared with $\sim 83 \text{ mV dec}^{-1}$ and larger hysteresis for the BiF_3 -gated control. Coloured dashed traces denote gate-leakage current. **e**, Local SS as a function of width-normalized drain current, extracted from the forward transfer characteristics at $V_{\text{DS}} = 0.1 \text{ V}$. The dashed line marks the room-temperature thermionic limit of 60 mV dec^{-1} . **f**, Constant-current extraction of drain-induced barrier lowering ($DIBL$) from the forward subthreshold transfer characteristics. Magenta and green traces denote the BiF_3 -only and TIHGS-gated devices, respectively; light and dark traces correspond to $V_{\text{DS}} = 0.1$ and 1.0 V . The horizontal dashed line marks $I_{\text{D}} = 10 \text{ pA } \mu\text{m}^{-1}$. Vertical dashed lines identify the corresponding gate voltages, and arrows indicate their separation. The $DIBL$ values are approximately $+3$ and -41 mV V^{-1} for the TIHGS- and BiF_3 -only-gated devices, respectively. **g**, Comparison of SS and hysteresis window for the TIHGS- and BiF_3 -gated devices from this work and representative reported MoS_2 FETs employing different gate dielectrics [22–28]. Literature values correspond to devices with different geometries and were obtained using different gate-voltage ranges, sweep conditions, and extraction protocols; they are therefore shown for contextual benchmarking rather than direct device-to-device ranking.

Frequency-dependent capacitor measurements further show modest dispersion and low loss from 1 kHz to 1 MHz (Extended Data Fig. 5c–e), and WSe₂/TIHGS MISCAPs reproduce a stack-level $\varepsilon_{\text{eff, TIHGS}} \approx 16$ after semiconductor integration (Extended Data Fig. 7, Extended Data Table 2, and Supplementary Notes 6 and 7).

We next evaluated the device-level effect of the gate-side boundary using MoS₂ FETs incorporating either a TIHGS or a fully converted BiF₃-only dielectric. The representative TIHGS-gated and BiF₃-gated devices had closely matched insulating BiF₃ thicknesses of approximately 43 and 42.8 nm, respectively, and channel lengths of 8.56 and 9.30 μm . Both devices retained a common BiF₃/MoS₂ channel-side material interface while differing in their gate-side boundary condition (Fig. 4a,c). The TIHGS-gated transistor exhibits an on–off current ratio exceeding 10^6 , a minimum room-temperature subthreshold swing (SS) of $\sim 65 \text{ mV dec}^{-1}$ and negligible hysteresis, compared with $\sim 10^5$, $\sim 83 \text{ mV dec}^{-1}$ and larger hysteresis for the BiF₃-gated control (Fig. 4b–e). Given the closely matched dielectric thicknesses and independently measured lower nominal TIHGS stack capacitance, the improved switching characteristics cannot be attributed simply to a thinner or higher-capacitance dielectric.

At a common width-normalized drain current of $I_D = 10 \text{ pA } \mu\text{m}^{-1}$, constant-current analysis yields signed $DIBL$ values of approximately +3 and -41 mV V^{-1} for the representative TIHGS- and BiF₃-only-gated devices, respectively (Fig. 4f). The TIHGS therefore exhibits a substantially smaller magnitude of subthreshold drain-bias dependence.

An air-oxidized BiO_x/Bi₂Se₃ control exhibits a minimum SS of $\sim 75 \text{ mV dec}^{-1}$ and $DIBL \approx -14 \text{ mV V}^{-1}$ at the higher current criterion of $I_D = 100 \text{ pA } \mu\text{m}^{-1}$ (Extended Data Fig. 8g). The smaller extracted $|DIBL|$ in both Bi₂Se₃-containing stacks at their respective current criteria is qualitatively consistent with a contribution from the buried gate-side interface, although their dielectric structures also differ. Device-to-device measurements further show that the TIHGS combines low SS with substantially lower gate leakage than the oxide control (Extended Data Fig. 8h).

Contextual literature benchmarking also places the representative TIHGS device in the low- SS /low-hysteresis region (Fig. 4g) [22–28]. The matched TIHGS/BiF₃-only comparison links improved switching and weaker subthreshold drain-bias dependence to a conversion-defined gate architecture with lower nominal capacitance. Independently, finite effective C_Q and the calculated subinterface states support an electronically compressible buried-boundary picture. These complementary results identify the gate-side electronic boundary as a design degree of freedom connecting interfacial electronic reconstruction with transistor electrostatics.

3 Conclusions

Surface conversion of Bi₂Se₃ provides a materials-based route to forming an insulating BiF₃ dielectric while reconstructing a buried gate-side electronic boundary. Position-resolved calculations distinguish the gap-opened chemical interface from an adjacent gap-closed subinterface state and reveal localized interfacial charge redistribution. The calculated near- E_F spectral weight and independently measured finite series response together support an electronically compressible buried boundary. In MoS₂ transistors with closely matched BiF₃ thicknesses and a common channel-side material interface, this architecture combines near-thermionic-limit switching, negligible hysteresis, and weak subthreshold drain-bias dependence despite its lower nominal capacitance. Our work establishes a gate-stack design strategy that distinguishes the chemical interface, electronic screening boundary, and dielectric capacitance. Engineering the identity and location of the screening boundary therefore complements dielectric scaling and channel-side interface optimization.

4 Methods

4.1 First-Principles Calculations

Density functional theory (DFT) calculations were performed using the Vienna *Ab initio* Simulation Package (VASP) [29]. All DFT calculations used the Perdew–Burke–Ernzerhof (PBE) functional within the generalized gradient approximation (GGA) [30], projector-augmented-wave (PAW) potentials [31], and spin–orbit coupling (SOC); this framework is hereafter denoted PBE+SOC. A plane-wave energy cutoff of 520 eV was used. Structures used for the DFT analyses were relaxed until the residual Hellmann–Feynman force on each atom was below 0.01 eV $\text{\AA}^{-1}$. Long-range dispersion interactions were included using the DFT-D3 method with Becke–Johnson damping [32]. The first-principles calculations presented

in Fig. 3a–e and Extended Data Fig. 4, together with the calculated properties summarized in Extended Data Table 1, were obtained within this DFT framework. Dielectric responses were evaluated using density-functional perturbation theory (DFPT) [33].

Amorphous BiF_3 , Bi_2Se_3 , and Bi_2O_3 structures were generated using melt–quench molecular-dynamics simulations with the SevenNet-Omni-ii2 machine-learning interatomic potential [34]. The resulting amorphous structures were subsequently relaxed within the DFT framework described above before electronic-structure and dielectric calculations.

For bulk Bi_2Se_3 , Bi_2O_3 , and BiF_3 structures, the Brillouin zone was sampled using k -point meshes corresponding to a reciprocal-space density of 100 k -points per $\text{\AA}^{-3}$. The pristine Bi_2Se_3 slab and the a- BiF_3 /c- Bi_2Se_3 heterophase slab were sampled using $5 \times 5 \times 1$ k -point meshes.

For the pristine Bi_2Se_3 surface calculation, a six-quintuple-layer (QL) crystalline Bi_2Se_3 slab terminated along the (0001) direction was used (Fig. 3a,b). To minimize direct interactions between adjacent periodic images, all slab structures were constructed with a vacuum spacing greater than 15 $\text{\AA}$.

For the heterophase calculation, an amorphous BiF_3 region was interfaced with a four-QL crystalline Bi_2Se_3 slab to model the buried $\text{BiF}_3/\text{Bi}_2\text{Se}_3$ boundary. The QL-resolved electronic structures were obtained directly from the VASP calculations by projecting the electronic states onto individual Bi_2Se_3 QLs at different distances from the heterophase boundary. We compare the subinterface QL, corresponding to the first Bi_2Se_3 QL directly beneath the $\text{BiF}_3/\text{Bi}_2\text{Se}_3$ interface, with the surface QL at the opposite side of the four-QL slab, corresponding to the fourth Bi_2Se_3 QL counted from the heterophase boundary (Fig. 3c,d).

4.2 SRIM Simulations

Stopping and range of ions in matter (SRIM) simulations were performed using the SRIM-2013 package [35]. We used a 50-nm-thick stoichiometric Bi_2Se_3 layer as a representative target geometry. The displacement energies of Bi and Se were set to 30 eV based on the values reported by Konobeyev *et al.* [36]. Because the ion-energy distribution incident on the sample surface was not measured experimentally, F^+ incident energies of 0.5, 1, 2.5, and 5 keV were examined as a sensitivity range for the accessible ballistic penetration length scale. The 5-keV calculation was deliberately included as a high-energy upper-bound case and should not be interpreted as the dominant fluorine-ion energy under the experimental plasma conditions. For each incident energy, we simulated 10,000 ions to obtain statistically stable fluorine depth distributions. To compare incident energies, the resulting fluorine depth profiles were area-normalized and smoothed with a Gaussian filter.

The SRIM calculations describe ballistic ion transport only and do not include plasma chemistry, transport of neutral reactive species, fluorine diffusion, sputter erosion, dynamic changes in target composition or density, surface charging, plasma-sheath evolution, or formation of BiF_3 . The calculations therefore provide a ballistic length-scale constraint on fluorine penetration rather than a quantitative description of fluorination kinetics, as discussed in Supplementary Note 2.

4.3 Synthesis of Polycrystalline Bi_2Se_3 Films

Polycrystalline Bi_2Se_3 films were synthesized by solution deposition followed by thermal selenization. Precursor solutions with concentrations of 5 and 10 wt% were prepared by dissolving bis{tris[*N*-ethoxy-2,2-dimethylpropanamidato]bismuth(III)} ($[\text{Bi}(\text{edpa})_3]_2$) in tetrahydrofuran (THF) and stirring for 60 min to obtain homogeneous solutions. The solutions were spin-coated onto 300-nm-thick SiO_2/Si substrates that had been rendered hydrophilic by ultraviolet–ozone treatment for 600 s. Spin coating was performed at 1,000 rpm for 10 s followed by 2,000 rpm for 30 s. The resulting precursor layers were immediately annealed at 100 $^\circ\text{C}$ for 1 min to remove residual solvent. The 5 and 10 wt% precursor concentrations produced Bi_2Se_3 films with nominal thicknesses of approximately 20 and 50 nm, respectively, after selenization.

For selenization, the precursor-coated substrates were placed in a quartz-tube furnace with 0.2 g of Se powder (99.99%, Sigma-Aldrich) positioned upstream. The furnace was purged and maintained under 99.9999% Ar at a flow rate of 1,000 standard cubic centimetres per minute (sccm) and a pressure of 3 Torr. The temperature was increased to 300 $^\circ\text{C}$ at a rate of 15 $^\circ\text{C min}^{-1}$ and maintained for 60 min to induce precursor decomposition and selenization, yielding large-area polycrystalline Bi_2Se_3 films. After selenization, the furnace was turned off and allowed to cool naturally to room temperature under the Ar atmosphere.

4.4 Spatially Selective Fluorination of Bi_2Se_3

Crystalline Bi_2Se_3 flakes used for spatially selective fluorination and transport measurements were mechanically exfoliated from bulk single crystals and transferred onto highly doped Si substrates capped with 285 nm SiO_2 . Selected regions of the Bi_2Se_3 surface were exposed using electron-beam lithography (Vistec EBPG 5000), while the regions intended to remain pristine were protected with polymethyl methacrylate (PMMA).

Surface conversion was performed in an Oxford Instruments PlasmaLab 80 Plus system using an SF_6/Ar plasma with SF_6 and Ar flow rates of 10 and 5 sccm, respectively, a chamber pressure of 50 mTorr, and a radio-frequency (RF) power of 50 W. The converted-layer thickness increased with plasma-treatment time and approached a self-limited thickness of $\sim 40\text{--}43$ nm after $\sim 20\text{--}25$ s of treatment (Extended Data Fig. 1). A 5-s treatment produced a $\sim 13.1\text{-nm}$ -thick converted surface layer under the conditions used for the thickness-calibration experiment, whereas a 25-s treatment produced a $\sim 42.5\text{--}43\text{-nm}$ -thick converted layer. Regions protected by PMMA remained unexposed to the SF_6 plasma.

For the plasma-control experiments in Extended Data Fig. 3a–h, Bi_2Se_3 was exposed to O_2 plasma at an O_2 flow rate of 30 sccm, a chamber pressure of 30 mTorr, and an RF power of 50 W for either 10 or 60 s.

For the lateral-transport and transfer-length-method structures in Fig. 2 and Extended Data Fig. 3, we patterned metal electrodes using electron-beam lithography and deposited 5 nm Ti and then 50 nm Au via electron-beam evaporation (MASA IM-9912), followed by lift-off. Hexagonal boron nitride (h-BN) flakes were deterministically transferred onto the devices as protective encapsulation using a dry-release transfer process based on polypropylene carbonate (PPC) and polydimethylsiloxane (PDMS).

4.5 Fabrication of BiF_3 and TIHGS MIM Capacitors

Polycrystalline Bi_2Se_3 films with nominal starting thicknesses of approximately 20 and 50 nm were used to fabricate the fully converted BiF_3 reference and partially converted topological-insulator heterophase gate stack (TIHGS) capacitor structures. The films were transferred onto substrates coated with 5 nm Ti and 50 nm Au on 285-nm-thick SiO_2/Si using a wet-transfer process.

Fluorination was carried out using the SF_6/Ar plasma conditions described above. Three polycrystalline conversion configurations were used. A nominally 20-nm-thick starting Bi_2Se_3 film treated for 5 s produced a $\sim 13\text{-nm}$ -thick converted BiF_3 layer while retaining underlying Bi_2Se_3 and was denoted TIHGS-13 (p20). A nominally 50-nm-thick starting film treated for 25 s produced a $\sim 43\text{-nm}$ -thick converted BiF_3 layer while retaining underlying Bi_2Se_3 and was denoted TIHGS-43 (p50). In contrast, a nominally 20-nm-thick starting film treated for 25 s was fully converted and used as the BiF_3 -only reference [BiF_3 -only (p20)]. Atomic force microscopy independently determined the post-conversion physical thickness of this fully converted BiF_3 layer to be ~ 23 nm, and this measured thickness was used for extraction of ϵ_{BiF_3} . For the partially converted TIHGS structures, the converted BiF_3 thickness and nominal starting Bi_2Se_3 thickness are reported independently because fluorination is accompanied by volume expansion and the residual Bi_2Se_3 thickness cannot be obtained by simple subtraction.

For capacitance measurements of the polycrystalline structures, a 30-nm-thick Al_2O_3 layer was deposited after fluorination by atomic layer deposition (ALD) at 300 °C using trimethylaluminum (TMA) and H_2O as the Al and O precursors, respectively. Each ALD cycle consisted of a 0.5-s TMA pulse, a 2-s Ar purge, a 0.5-s H_2O pulse, and a 2-s Ar purge, and a total of 270 cycles was used to obtain the nominal 30-nm thickness. Independently fabricated 30-nm Al_2O_3 reference capacitors prepared under the same ALD conditions were used to determine the Al_2O_3 dielectric response and to de-embed its series contribution from the BiF_3 -only and TIHGS structures. Top electrodes were defined using a shadow mask, followed by electron-beam evaporation of 15 nm Pt, 150 nm Ag, and 20 nm Au, giving an Au/Ag/Pt top-electrode stack.

Crystalline- Bi_2Se_3 -based TIHGS MIM capacitors were fabricated separately from mechanically exfoliated Bi_2Se_3 flakes with nominal starting thicknesses of 49, 65, 91, 128, or 179 nm. The Bi_2Se_3 flakes were first transferred onto bottom electrodes comprising 5 nm Ti and 50 nm Au. These samples were fluorinated under conditions producing a $\sim 43\text{-nm}$ -thick converted BiF_3 layer and are denoted TIHGS-43 (cN), where N is the nominal starting crystalline- Bi_2Se_3 thickness in nanometres. Following fluorination, 100-nm-thick Au top electrodes were deposited directly onto the converted BiF_3 surface without an intervening Ti adhesion layer, yielding Au/ BiF_3 / Bi_2Se_3 /Au/Ti MIM structures.

4.6 Fabrication of WSe₂/TIHGS MISCAPs

Metal-insulator-semiconductor capacitors (MISCAPs) were fabricated using crystalline-Bi₂Se₃-based TIHGS structures containing a ~ 43 -nm-thick converted BiF₃ layer. Bi₂Se₃ flakes were first transferred onto bottom electrodes comprising 5 nm Ti and 50 nm Au. A 37.37-nm-thick WSe₂ flake, as determined by atomic force microscopy, was deterministically transferred onto the BiF₃ surface using a PPC/PDMS-based dry-release transfer process, thereby forming the semiconductor/dielectric interface. Following lithography, top electrodes comprising 15 nm Pt, 150 nm Ag, and 20 nm Au were deposited by electron-beam evaporation. The completed MISCAP therefore had an Au/Ag/Pt/WSe₂/BiF₃/Bi₂Se₃/Au/Ti vertical stack. The underlying Bi₂Se₃ remained electrically coupled to the bottom Au/Ti electrode, while WSe₂ formed the semiconductor side of the MISCAP.

4.7 Fabrication of MoS₂ Field-Effect Transistors

MoS₂ FETs were fabricated using three gate-stack configurations: a TIHGS comprising partially converted BiF₃/Bi₂Se₃, a fully converted BiF₃-only dielectric, and an air-oxidized BiO_x/Bi₂Se₃ control stack.

For the TIHGS-gated devices, Bi₂Se₃ flakes thicker than the self-limited fluorination depth were partially converted so that an insulating BiF₃ region directly faced the MoS₂ channel while electrically conducting Bi₂Se₃ remained beneath the converted region and was electrically coupled to the metal gate. For the BiF₃-gated control devices, Bi₂Se₃ flakes thinner than the self-limited conversion depth were fully fluorinated, producing a BiF₃-only dielectric in direct contact with the metal gate. Thus, the TIHGS-gated and BiF₃-gated devices shared a common BiF₃/MoS₂ channel-side interface but differed in their gate-side electrostatic boundary.

Mechanically exfoliated MoS₂ flakes were assembled onto the respective gate-stack structures as follows. Bi₂Se₃ flakes were first transferred onto bottom electrodes comprising 5 nm Ti and 50 nm Au and were then partially or fully fluorinated under the conditions described above to form the TIHGS or BiF₃-only gate stack, respectively. MoS₂ flakes approximately 20 nm thick and 30 μ m in lateral dimension were subsequently transferred onto the BiF₃ surface using a PPC/PDMS-based dry-release transfer process. Source and drain electrodes were patterned by electron-beam lithography and formed by electron-beam evaporation of 5 nm Ti followed by 50 nm Au, with Ti directly contacting MoS₂.

For the chemically derived interface control, Bi₂Se₃ was exposed to ambient air for 2 days to form an oxidized BiO_x surface layer. The corresponding oxide thickness was estimated to be ~ 1.94 nm based on the previously reported oxidation behaviour of Bi₂Se₃ [37]. MoS₂ was subsequently integrated onto the BiO_x/Bi₂Se₃ stack using the same device-assembly procedure, and source/drain electrodes were fabricated as described above.

For the representative devices compared in Fig. 4, the insulating BiF₃ thicknesses were closely matched. For the BiF₃-gated control, AFM measured a Bi₂Se₃ thickness of 37.2 nm before fluorination and a post-conversion BiF₃ thickness of 42.8 nm after complete fluorination. The TIHGS-gated device contained an approximately 43-nm-thick converted BiF₃ region while retaining electrically conducting Bi₂Se₃ underneath. Thus, the two devices had closely matched insulating-layer thicknesses while retaining distinct gate-side screening boundaries. The MoS₂ channel dimensions (length $\times$ width) were 8.56 μ m $\times$ 2.93 μ m for the TIHGS-gated device and 9.30 μ m $\times$ 2.12 μ m for the BiF₃-gated control.

4.8 Structural and Chemical Characterization

Optical microscopy was performed using Olympus BX60 and MX63L microscopes. Atomic force microscopy (AFM) in Extended Data Fig. 2a,b was performed using a Bruker Dimension Icon in Peak-Force Tapping mode with a ScanAsyst-Air cantilever having a nominal tip radius of ~ 2 nm. AFM was used to determine flake thicknesses, converted-layer-associated surface-height changes, and the WSe₂ thickness used in the MISCAP analysis.

Cross-sectional transmission electron microscopy (TEM) was performed using a JEOL JEM-2200FS. Cross-sectional specimens were prepared by focused-ion-beam milling using a JEOL JIB-4700F. We used high-angle annular dark-field scanning transmission electron microscopy (HAADF-STEM) and energy-dispersive X-ray spectroscopy (EDS) to examine the spatial distributions of Bi, Se, O, Ti, and Au across the fluorinated heterostructures.

Raman spectroscopy in Extended Data Fig. 2c,d was performed using a WITec Alpha 300 RA+ system with a continuous-wave excitation laser with a wavelength of 532 nm and a power of 10 μ W. Raman

mapping was used to compare pristine and plasma-treated regions and to monitor the characteristic Bi_2Se_3 phonon modes.

X-ray photoelectron spectroscopy (XPS) in Extended Data Fig. 2e–h was performed using a Kratos Axis Ultra system equipped with a monochromatic Al $K\alpha$ X-ray source with an energy of 1486.96 eV. The analysed area was $\sim 0.3 \times 0.7 \text{ mm}^2$. We acquired high-resolution spectra using a pass energy of 20 eV, an energy step of 0.1 eV, and an X-ray spot size of $\sim 200 \text{ }\mu\text{m}$. Because the finite escape depth of the emitted photoelectrons limits the information depth of XPS, the measured spectra predominantly probe the near-surface chemical composition. This surface sensitivity enables characterization of the chemical changes induced by SF_6 fluorination.

Optical microscopy, AFM, and Raman measurements were performed under ambient laboratory conditions unless otherwise noted. TEM/STEM and XPS measurements were performed under the vacuum conditions intrinsic to the corresponding instruments.

4.9 Electrical Measurements and Parameter Extraction

Electrical measurements were performed at room temperature using a Keithley 2636B source-measure unit for current–voltage measurements and a Keysight E4980A inductance–capacitance–resistance (LCR) meter for capacitance and conductance measurements. Devices were measured using electrical probes or wire-bonded sample holders, as appropriate. Transistor characteristics were measured in the dark to suppress photoinduced current. All measurements were performed in ambient air.

For the transfer-length-method (TLM) analysis in Extended Data Fig. 3i–m, the total two-terminal resistance was obtained from the linear low-bias I – V response and fitted as

$$R_T = 2R_C + R_{\text{Sh}} \frac{L_X}{W},$$

where R_C is the contact resistance per contact, R_{Sh} is the channel sheet resistance, L_X is the electrode spacing, and W is the channel width. R_C was obtained from one half of the fitted zero-length intercept, and R_{Sh} was obtained from the fitted slope after accounting for the measured channel width.

For the MIM capacitors in Fig. 3f,g, capacitance–voltage measurements were performed at 1 MHz using an alternating-current (AC) excitation amplitude of 0.05 V. All capacitances reported in the main text were normalized by the active capacitor area. For the Al_2O_3 -capped polycrystalline structures, the independently measured Al_2O_3 capacitance was de-embedded according to

$$\frac{1}{C_{\text{total}}} = \frac{1}{C_{\text{Al}_2\text{O}_3}} + \frac{1}{C_X},$$

where $C_X = C_{\text{BiF}_3}$ for the fully converted BiF_3 -only structure and $C_X = C_{\text{TIHGS}}$ for the partially converted TIHGS structure. The BiF_3 relative permittivity was calculated using

$$C_{\text{BiF}_3} = \frac{\varepsilon_0 \varepsilon_{\text{BiF}_3}}{t_{\text{BiF}_3}},$$

where t_{BiF_3} is the independently determined physical thickness of the BiF_3 layer. For the BiF_3 -only (p20) reference, AFM yielded $t_{\text{BiF}_3} \approx 23 \text{ nm}$, which was used to extract a mean $\varepsilon_{\text{BiF}_3}$ of 28.65 and a median value of 30.16. For TIHGS structures, the BiF_3 -thickness-normalized effective relative permittivity was defined as

$$\varepsilon_{\text{eff, TIHGS}} = \frac{C_{\text{TIHGS}} t_{\text{BiF}_3}}{\varepsilon_0}.$$

The electrically conducting residual Bi_2Se_3 was not included in the geometric dielectric thickness. The effective interfacial quantum capacitance was obtained using

$$\frac{1}{C_{\text{TIHGS}}} = \frac{1}{C_{\text{BiF}_3}} + \frac{1}{C_Q}.$$

Accordingly, C_Q is treated as an effective interfacial electronic-compressibility response rather than as an intrinsic dielectric capacitance or a universal material constant.

Frequency-dependent capacitance and loss measurements shown in Extended Data Fig. 5c–e were performed from 1 kHz to 1 MHz using a direct-current (DC) bias of 0.1 V and an AC excitation amplitude

of 0.05 V. The current-density–voltage measurement and corresponding field-dependent transport analyses shown in Extended Data Fig. 6a–c were obtained using the Keithley 2636B. For the TIHGS MIM leakage measurements, the bias voltage was applied to the top Au electrode in direct contact with BiF₃, while the bottom Au/Ti electrode electrically coupled to the residual Bi₂Se₃ was grounded. Under positive top-electrode bias ($V > 0$), electron injection therefore occurs from the residual Bi₂Se₃ side across the buried BiF₃/Bi₂Se₃ interface into BiF₃. For field-dependent leakage analysis, the electric field was calculated as $E = |V|/t_{\text{BiF}_3}$, using only the physical thickness of the insulating BiF₃ layer.

For the WSe₂/TIHGS MISCAP characterized in Extended Data Fig. 7, capacitance–voltage and parallel-conductance characteristics were measured from 10 kHz to 1 MHz over the gate-voltage range $-1 \text{ V} \leq V_G \leq 1 \text{ V}$ using an AC excitation amplitude of 0.05 V. The flat-band condition was extracted from the 10-kHz capacitance characteristic because the accumulation-to-depletion transition remained within the accessible low-leakage gate-voltage range at this frequency. The flat-band voltage was identified from the zero crossing of d^2C/dV_G^2 associated with the principal accumulation–depletion inflection. The graphical consistency analysis used to extract $\epsilon_{\text{eff,TIHGS}}$, together with the subsequent extraction of C_{TIHGS} , effective semiconductor screening length $L_{\text{D,eff}}$, and apparent majority-carrier concentration N_{app} , is described in Supplementary Note 6. The effective electrically active trap density, $D_{\text{it,eff}}$, was obtained using the 10-kHz/1-MHz high–low-frequency capacitance method described in Supplementary Note 7. The extracted electrostatic parameters are summarized in Extended Data Table 2. Because the 10-kHz characteristic is not a true quasi-static limit and an independently resolved frequency-dependent TIHGS capacitance was not available, $D_{\text{it,eff}}$ is interpreted as an effective electrically active trap response sampled within the experimental frequency window rather than as a unique microscopic density of states exclusively at the WSe₂/BiF₃ interface.

For the MoS₂ field-effect transistors (FETs) characterized in Fig. 4 and Extended Data Fig. 8, output characteristics were measured over $0 \leq V_{\text{DS}} \leq 1.0 \text{ V}$, where V_{DS} is the drain–source voltage, at gate–source voltages $-0.3 \text{ V} \leq V_{\text{GS}} \leq 0.5 \text{ V}$. Transfer characteristics were measured over $-0.5 \text{ V} \leq V_{\text{GS}} \leq 0.5 \text{ V}$ at $0.1 \text{ V} \leq V_{\text{DS}} \leq 1.0 \text{ V}$. Forward and reverse gate-voltage sweeps were measured under otherwise identical bias conditions, while the gate-leakage current was recorded simultaneously with the drain current. Throughout the transistor analysis, I_{D} and I_{G} denote the drain and gate currents normalized by the corresponding channel width, respectively.

The local subthreshold swing was calculated from

$$SS = \left(\frac{d \log_{10} I_{\text{D}}}{dV_{\text{GS}}} \right)^{-1},$$

using the forward gate-voltage sweeps for all three gate-stack configurations. The minimum SS within the experimentally resolved subthreshold regime is reported unless otherwise stated. The SS characteristics in Fig. 4e and the device-to-device values in Extended Data Fig. 8h were evaluated at $V_{\text{DS}} = 0.1 \text{ V}$. No smoothing was applied to the transfer characteristics before SS extraction.

For the hysteresis analysis, the linear-extrapolation threshold voltage, $V_{\text{th,LE}}$, was defined as the gate-voltage-axis intercept of the tangent to the $I_{\text{D}}-V_{\text{GS}}$ characteristic at the point of maximum transconductance on a linear current scale. With $g_{\text{m}} = dI_{\text{D}}/dV_{\text{GS}}$ and V_{GS}^* denoting the gate voltage at this point,

$$V_{\text{th,LE}} = V_{\text{GS}}^* - \frac{I_{\text{D}}(V_{\text{GS}}^*)}{g_{\text{m}}(V_{\text{GS}}^*)}.$$

The hysteresis window was defined as the difference in $V_{\text{th,LE}}$ between the forward and reverse sweeps at the same drain bias. The gate-voltage step size was 0.01 V and the effective sweep rate was 7.7 mV s^{-1} . The same definition was used for the TIHGS-, BiF₃-only-, and BiO_x/Bi₂Se₃-gated devices.

Drain-induced barrier lowering ($DIBL$) was extracted from the forward subthreshold transfer characteristics using a constant-current method. We denote by $V_{\text{GS,CC}}(V_{\text{DS}}; I_{\text{ref}})$ the gate voltage at which the width-normalized drain current reaches the selected reference value, $I_{\text{D}} = I_{\text{ref}}$. These gate voltages were obtained by linear interpolation between adjacent measured points in $\log_{10} I_{\text{D}}$ versus V_{GS} . The signed coefficient was calculated as

$$DIBL(I_{\text{ref}}) = \frac{V_{\text{GS,CC}}(0.1 \text{ V}; I_{\text{ref}}) - V_{\text{GS,CC}}(1.0 \text{ V}; I_{\text{ref}})}{1.0 \text{ V} - 0.1 \text{ V}}.$$

The TIHGS- and BiF₃-only-gated devices in Fig. 4f were evaluated at the common reference current $I_{\text{ref}} = 10 \text{ pA } \mu\text{m}^{-1}$ ($10^{-5} \text{ } \mu\text{A } \mu\text{m}^{-1}$). The BiO_x/Bi₂Se₃ control in Extended Data Fig. 8g was evaluated at $I_{\text{ref}} = 100 \text{ pA } \mu\text{m}^{-1}$ ($10^{-4} \text{ } \mu\text{A } \mu\text{m}^{-1}$), providing greater separation from its leakage-dominated low-current region.

The sign was retained to distinguish the direction of the drain-bias-induced shift: negative *DIBL* indicates that a more positive gate voltage is required to maintain the selected current as the drain bias increases. Values in V V^{-1} were multiplied by 10^3 for reporting in mV V^{-1} . The coefficient quantifies the net subthreshold drain-bias dependence at the specified current criterion, while its magnitude describes the sensitivity irrespective of the shift direction.

For the device-to-device comparison in Extended Data Fig. 8h, the minimum *SS* of each device was extracted from the forward transfer characteristic at $V_{\text{DS}} = 0.1 \text{ V}$ using the same local-derivative procedure. The gate-leakage metric was $|I_{\text{G}}|$, evaluated at $V_{\text{GS}} = 0.5 \text{ V}$ and $V_{\text{DS}} = 0.1 \text{ V}$ for every configuration. Each plotted marker pairs the minimum *SS* and gate-leakage metric of one independent device. Sample sizes are specified in Statistics and Reproducibility.

4.10 Statistics and Reproducibility

No inferential statistical hypothesis tests were applied. For the MIM-capacitor statistics in Fig. 3f,g, the sample sizes were $n = 25, 33, 24$, and 5 independent capacitors for BiF₃-only (p20), TIHGS-13 (p20), TIHGS-43 (p50), and TIHGS-43 (cN), respectively. The Al₂O₃ reference in Extended Data Fig. 5a,b comprised $n = 75$ independent capacitors. For the device-to-device *SS*-gate-leakage comparison in Extended Data Fig. 8h, the sample sizes were $n = 4$ for the TIHGS-gated devices and $n = 3$ each for the BiF₃-only- and BiO_x/Bi₂Se₃-gated devices. The *DIBL* values in Fig. 4f and Extended Data Fig. 8g describe the representative devices shown, rather than averages over these device populations. Mean and median values are reported where indicated.

4.11 Use of Large Language Models

The authors wrote the original manuscript draft. ChatGPT (OpenAI) was subsequently used for grammar correction and language refinement of author-written text, together with editorial feedback on manuscript organization and the presentation of the authors' results. ChatGPT was not used to generate the original manuscript draft. The authors reviewed all proposed edits, revised the text as needed, and approved the final wording, while independently evaluating the scientific interpretations and conclusions. The authors prepared all figures, including data plots and schematics. No large language models or generative AI tools were used to generate, plot, draw, modify, or enhance the visual content of these figures. The authors take full responsibility for the accuracy, integrity, and final content of the manuscript.

Data Availability

The data supporting the findings of this study are available from the corresponding authors upon reasonable request.

Code Availability

No custom code central to the conclusions of this study was developed.

Acknowledgements

We acknowledge the Gwangju Institute of Science and Technology (GIST) Nanoinfra for Compound Semiconductors (G-NICS), the GIST Advanced Institute of Instrumental Analysis (GAIA), the Otaniemi Research Infrastructure (OtaNano Micronova Centre and OtaNano Nanomicroscopy Centre), and the Korea Photonics Technology Institute (KOPTI) for providing their cleanroom facilities and technical support.

Funding

This work was supported by the National Research Foundation of Korea (NRF) Grant, funded by the Korean Government's Ministry of Science and ICT (MSIT) with Grant Nos. RS-2026-25587884 (to

488 H.H.Y.), NRF-2023R1A2C1006519 (to K.P.), RS-2026-25593368 (to S.B.C.) and RS-2025-25436243 (to
489 M.S.); the Research Council of Finland with Grant Nos. 360411, 359009, 365686, 367808, and 374168
490 (to Z.S.); the Research Council of Finland Flagship Programme (Photonics Research and Innovation,
491 PREIN) with Grant No. 320167 (to Z.S.); the Research Council of Finland Flagship Programme (Finnish
492 Quantum Flagship, FQF) with Grant No. 358877; the Research Council of Finland (Finnish Centre of
493 Excellence in Quantum Materials, QMAT) with Grant No. 86572 (to Z.S.); the Jane and Aatos Erkko
494 Foundation and the Technology Industries of Finland Centennial Foundation with Grant No. Future
495 Makers 2022 (to Z.S.); the Global Value-Up 10X Project with Grant No. KH1100, funded by the GIST
496 in 2026 (to H.H.Y. and H.-J.S.); the GIST Graduate International Research Experience Fellowship (to
497 H.H.Y. and G.J.); the U.S. Department of Energy, Office of Science, Basic Energy Sciences with Grant
498 No. DOE-SC0020653 (to S.A.T.); the U.S. National Science Foundation with Grant Nos. CBET-2330110
499 (to S.A.T.), DMR-2534832 (to S.A.T.), and CMMI-2533623 (to S.A.T.); the Army Research Office with
500 Grant No. W911NF-25-1-0045 (to S.A.T.); the Applied Materials Inc. (to S.A.T.); and the Lawrence
501 Semiconductor Research Laboratory Inc. (to S.A.T.).


502 Author Information

503 **Contributions.** M.S., J.K., M.G.U., and W.K. contributed equally to this work. H.H.Y. conceived
504 the ideas and designed the experiments. S.H.C., D.-H.K., H.-J.S., C.-H.L., M.C., S.B.C., Z.S., K.P., and
505 H.H.Y. proposed theoretical interpretations. H.U.L., D.W.J., and S.B.C. performed DFT calculations and
506 SRIM simulations. S.A.T. provided high-quality Bi₂Se₃, MoS₂, WSe₂, and h-BN crystals. D.L. and W.S.
507 offered wafer-scale Bi₂Se₃ films. M.S., M.G.U., W.K., J.P., X.C., and H.H.Y. developed and optimized
508 the SF₆/Ar plasma process for controlled surface conversion of Bi₂Se₃ into BiF₃. M.S., M.G.U., W.K.,
509 J.P., D.L., G.J., S.M., and H.H.Y. fabricated the devices. L.Y. obtained TEM images. J.L. carried out
510 XPS. M.S., W.K., J.P., S.C., K.S.K., Z.S., and H.H.Y. characterized the devices using TEM, HAADF-
511 STEM, EDS, AFM, Raman, and XPS datasets. M.S., J.K., W.K., J.P., K.P., and H.H.Y. performed the
512 electrical measurements. G.J., S.M., Y.T.M., and X.C. helped with the electrical measurements. Y.D.,
513 S.H.C., K.S.K., D.-H.K., H.-J.S., W.S., S.A.T., C.-H.L., M.C., S.B.C., Z.S., and K.P. commented on
514 the experimental results and assisted with the data analysis. Y.D., D.-H.K., H.-J.S., M.C., S.B.C., Z.S.,
515 and K.P. suggested insights for organizing the data. H.H.Y. wrote the manuscript. S.B.C., Z.S., K.P.,
516 and H.H.Y. supervised the research. All authors participated extensively in the scientific discussion and
517 contributed to the manuscript.


518 **Corresponding authors.** Correspondence to Sung Beom Cho, Zhipei Sun, Kibog Park, and Hoon
519 Hahn Yoon

520 Ethics Declarations


521 **Competing interests.** The authors declare no competing interests.

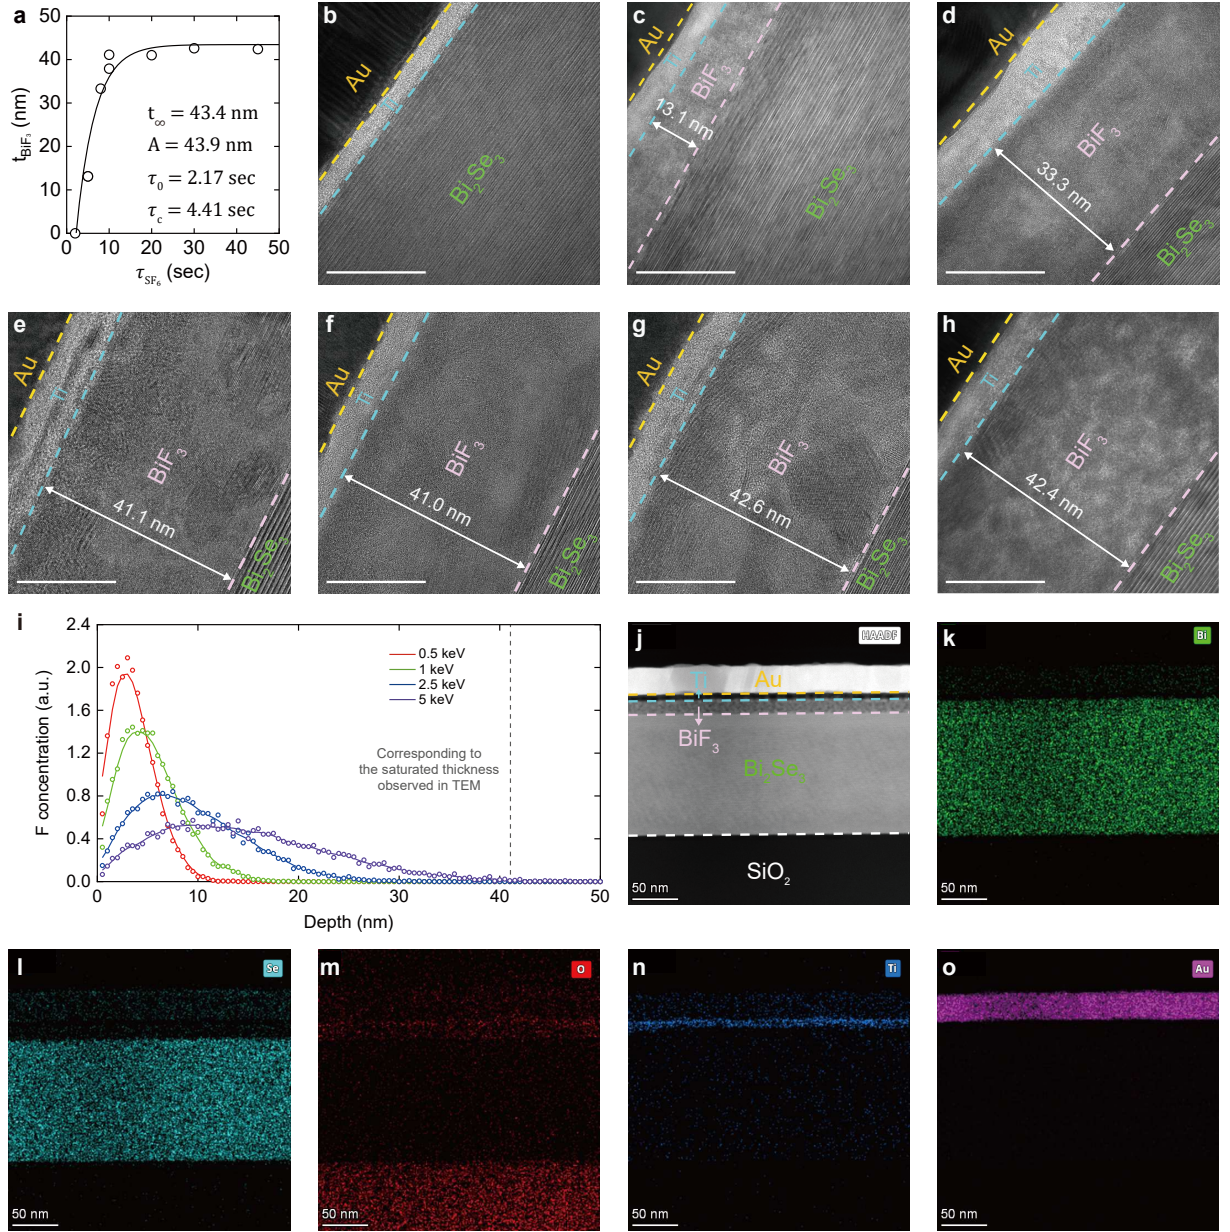


Extended Data Fig. 1 Self-limited surface conversion and fluorine-penetration length scale. **a**, Converted BiF_3 thickness (t_{BiF_3}) as a function of SF_6 plasma-treatment time (τ_{SF_6}). The line is an empirical saturating-exponential fit used to parameterize the observed approach to a limiting thickness; the fitted time constant is not assigned a unique microscopic kinetic meaning. **b–h**, Cross-sectional transmission electron microscopy (TEM) images after plasma exposure for 2, 5, 8, 10, 20, 30 and 45 s, respectively. Scale bars, 20 nm. **i**, Fluorine depth distributions in Bi_2Se_3 calculated using Stopping and Range of Ions in Matter (SRIM) simulations for assumed F^+ incident energies of 0.5, 1, 2.5 and 5 keV. The dashed line marks the experimentally observed ~ 40 – 43 -nm saturation thickness. The 5-keV case is included as a deliberately high-energy upper-bound calculation; the simulations constrain an accessible ballistic penetration length scale and do not represent the measured plasma ion-energy distribution or fluorination kinetics. **j–o**, High-angle annular dark-field scanning transmission electron microscopy (HAADF-STEM) image (**j**) and corresponding energy-dispersive X-ray spectroscopy (EDS) elemental maps of Bi (**k**), Se (**l**), O (**m**), Ti (**n**) and Au (**o**). Se is concentrated predominantly in the residual Bi_2Se_3 , whereas the converted region remains Bi-containing. Scale bars, 50 nm.

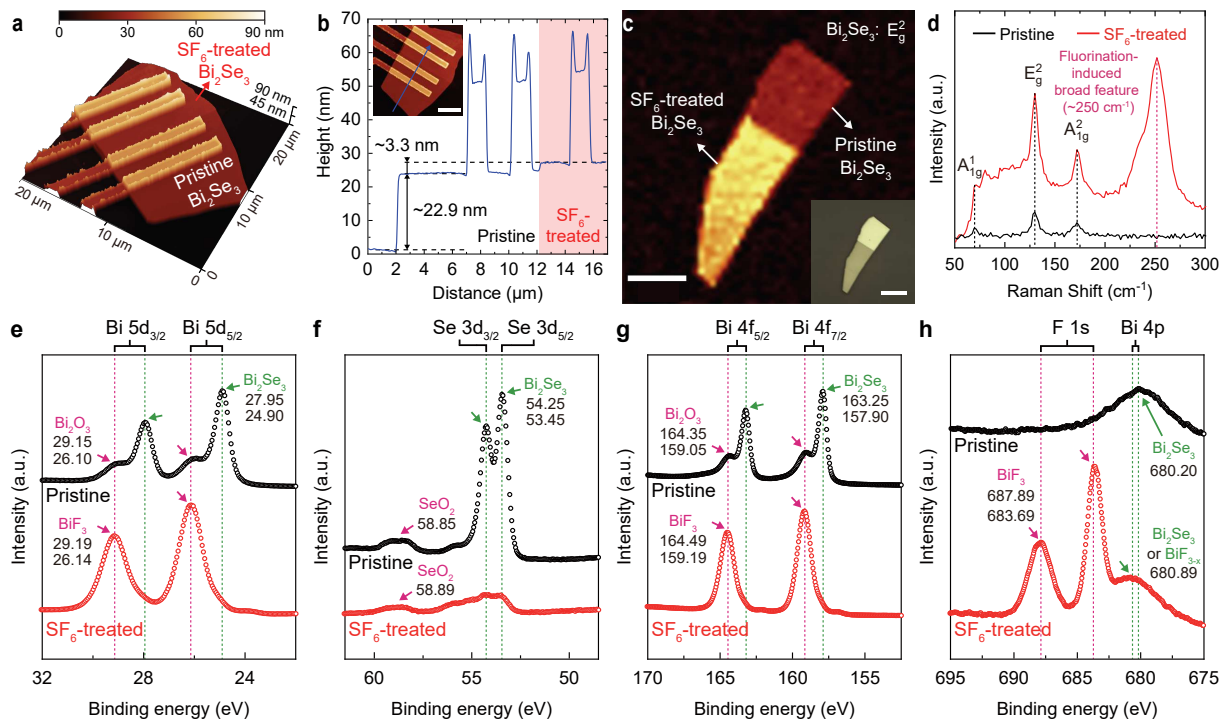

Extended Data Fig. 2 Spatially selective conversion of Bi_2Se_3 into BiF_3 . **a,b**, Atomic force microscopy (AFM) topography across pristine and SF_6 -treated Bi_2Se_3 regions (**a**) and corresponding line-height profile (**b**), showing a surface-height increase of ~ 3.3 nm after fluorination. The difference between the converted-layer thickness (~ 13.1 nm), independently determined by cross-sectional TEM under the same 5-s treatment condition, and the measured surface-height increase (~ 3.3 nm) indicates that the converted layer cannot be explained by additive deposition and is consistent with consumption and volumetric expansion of the underlying Bi_2Se_3 . Scale bar of inset in **b**, $5\ \mu\text{m}$. **c**, Raman map of the Bi_2Se_3 E_g^2 mode across pristine and treated regions; inset, corresponding optical micrograph. Scale bar, $7\ \mu\text{m}$; inset scale bar, $10\ \mu\text{m}$. **d**, Raman spectra showing the characteristic Bi_2Se_3 modes and an additional broad feature near $250\ \text{cm}^{-1}$ after fluorination. **e–h**, X-ray photoelectron spectroscopy (XPS) of pristine and treated Bi_2Se_3 : Bi 5d (**e**), Se 3d (**f**), Bi 4f (**g**), and F 1s/Bi 4p (**h**). Fluorination suppresses the Bi_2Se_3 -derived Bi and Se components, introduces Bi–F components in the Bi spectra, and produces an F 1s feature near $687.9\ \text{eV}$, supporting formation of a fluorinated Bi-containing surface phase.

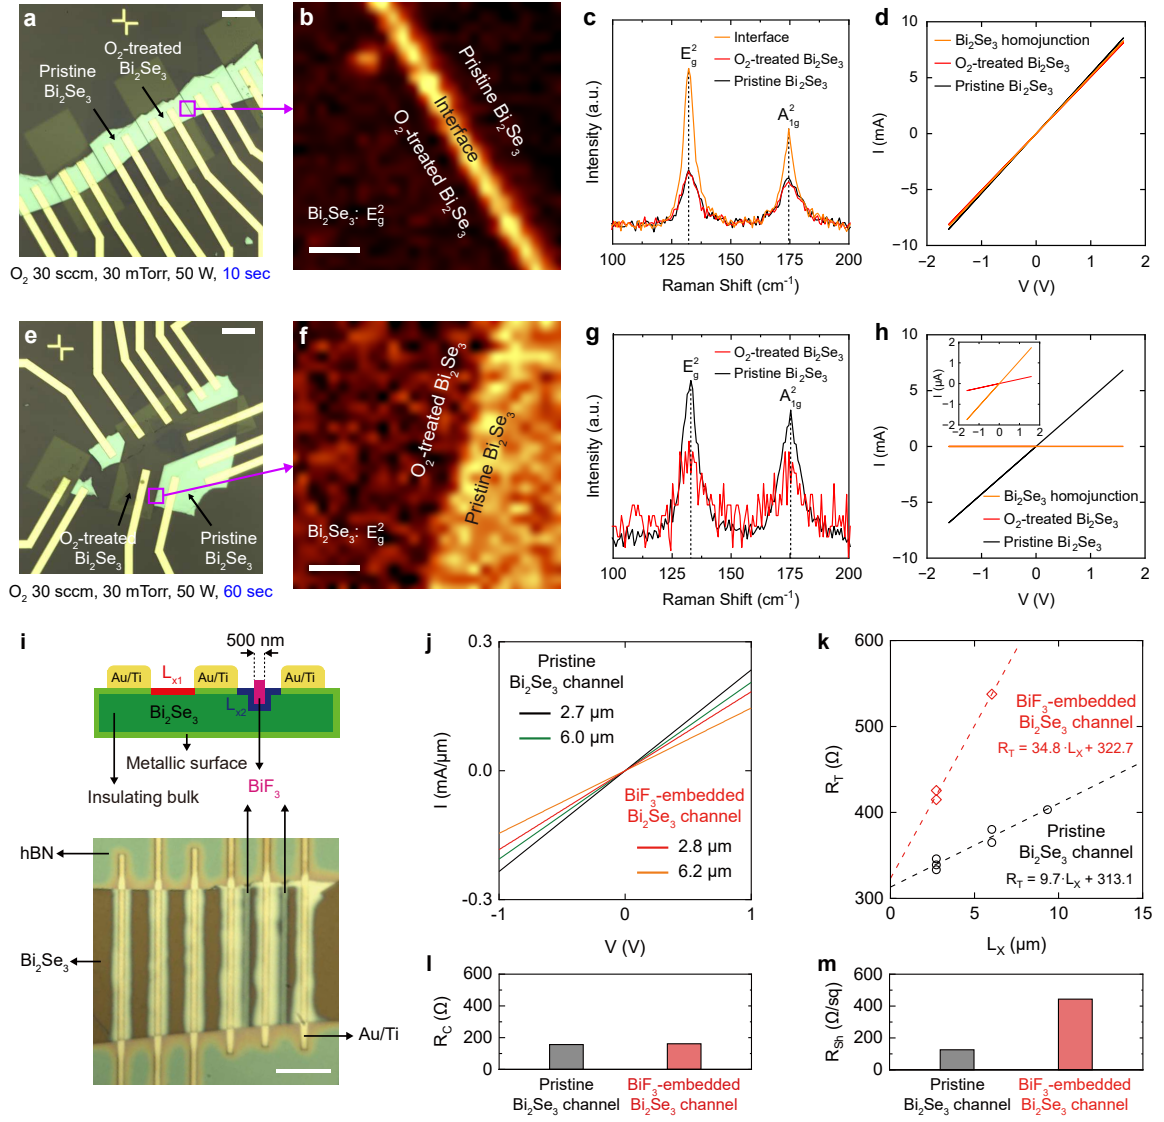


Extended Data Fig. 3 O₂-plasma control and quantitative buried conduction in Bi₂Se₃. **a–d**, Bi₂Se₃ after 10 s of O₂-plasma treatment: optical micrograph (**a**), Raman map of the E_g^2 mode (**b**), Raman spectra from pristine, treated, and interfacial regions (**c**), and current–voltage (I – V) characteristics of pristine, treated, and lateral pristine/treated structures (**d**). Scale bars, 50 μm in **a** and 1 μm in **b**. **e–h**, Corresponding measurements after 60 s of O₂-plasma treatment: optical micrograph (**e**), Raman map (**f**), Raman spectra (**g**), and I – V characteristics (**h**). The treated region remains conductive, unlike after SF₆ fluorination. Scale bars, 50 μm in **e** and 1 μm in **f**. O₂-plasma treatment was performed at 30 sccm, 30 mTorr, and 50 W. **i–m**, Transfer-length-method (TLM) analysis of conduction through residual Bi₂Se₃ beneath a locally converted BiF₃ region. **i**, Schematic and optical micrograph of the TLM geometry containing a ~ 500 -nm-wide converted region; scale bar, 5 μm . **j**, Representative I – V characteristics. **k**, Total resistance versus channel length, with linear fits $R_T = 9.7L_X + 313.1$ and $R_T = 34.8L_X + 322.7$ for pristine and converted structures, respectively. **l,m**, Extracted contact resistance and sheet resistance. The contact resistance remains ~ 157 – 161 Ω , whereas the sheet resistance increases by ~ 3.5 -fold after local conversion.

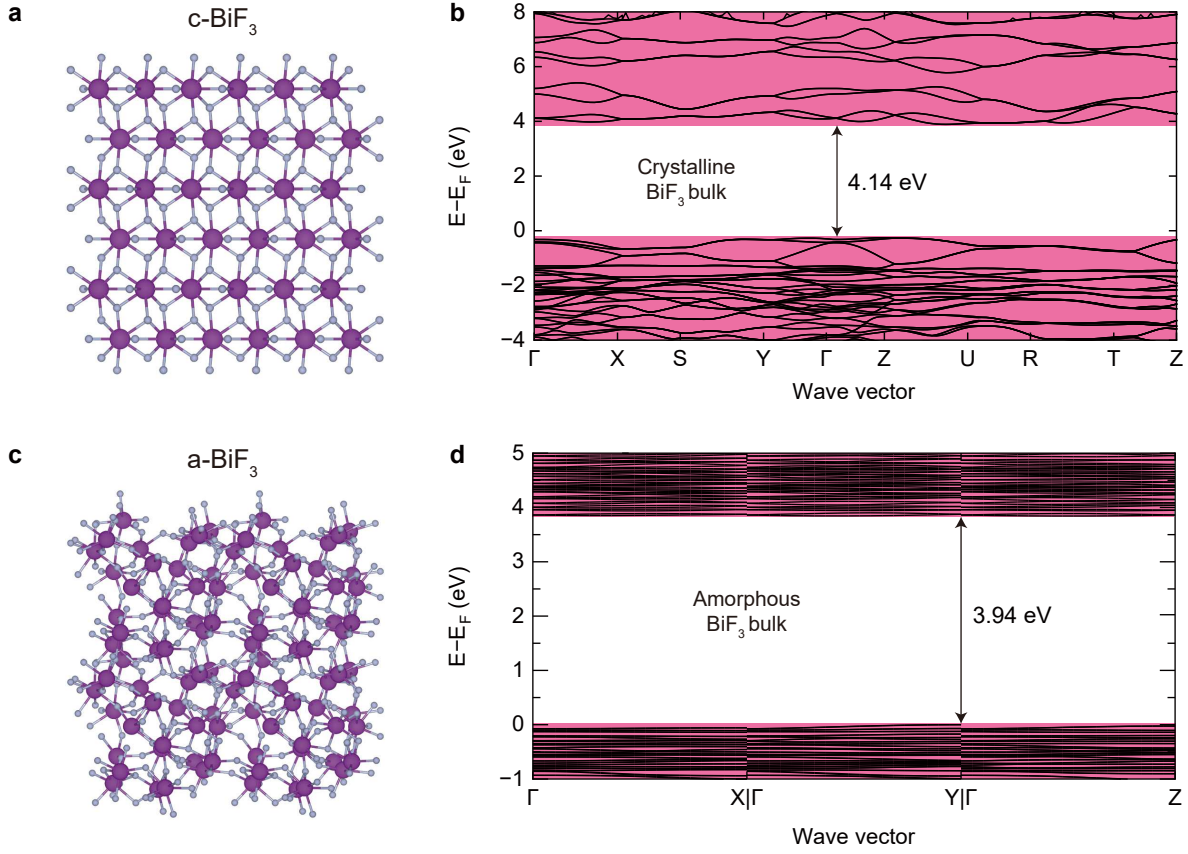


Extended Data Fig. 4 Calculated electronic band structures of crystalline and amorphous BiF_3 . **a**, Structural model of crystalline BiF_3 . **b**, Calculated electronic band structure of crystalline BiF_3 along the Γ -X-S-Y- Γ -Z-U-R-T-Z high-symmetry path, showing an insulating band gap of 4.14 eV. **c**, Structural model of amorphous BiF_3 . **d**, Calculated electronic band structure of amorphous BiF_3 along the Γ -X, Γ -Y, and Γ -Z reciprocal-space directions, showing an insulating band gap of 3.94 eV. Energies in **b** and **d** are plotted relative to the calculated Fermi level (E_F).

Extended Data Table 1 Calculated band gaps and dielectric properties of Bi_2Se_3 , BiF_3 , and Bi_2O_3 in crystalline and amorphous phases. The static relative permittivity [$\epsilon_r(0)$] includes both electronic and ionic contributions, whereas the high-frequency relative permittivity [$\epsilon_r(\infty)$] represents the ion-clamped electronic contribution. The refractive index (n) was calculated from the averaged $\epsilon_r(\infty)$. Stoichiometric Bi_2O_3 is included only as a theoretical reference for the oxidized BiO_x phase in the $\text{BiO}_x/\text{Bi}_2\text{Se}_3$ control gate stack demonstrated in Extended Data Fig. 8.


Phase	Material	Band gap (eV)	Relative permittivity		n
			$\epsilon_r(0)$	$\epsilon_r(\infty)$	
Crystalline	Bi_2Se_3	0.310	38.057	37.851	6.152
Amorphous	Bi_2Se_3	0.777	42.715	13.329	3.651
Crystalline	BiF_3	4.140	29.385	3.227	1.796
Amorphous	BiF_3	3.936	25.311	4.056	2.014
Crystalline	Bi_2O_3	2.038	32.023	6.110	2.472
Amorphous	Bi_2O_3	2.096	34.938	6.118	2.473

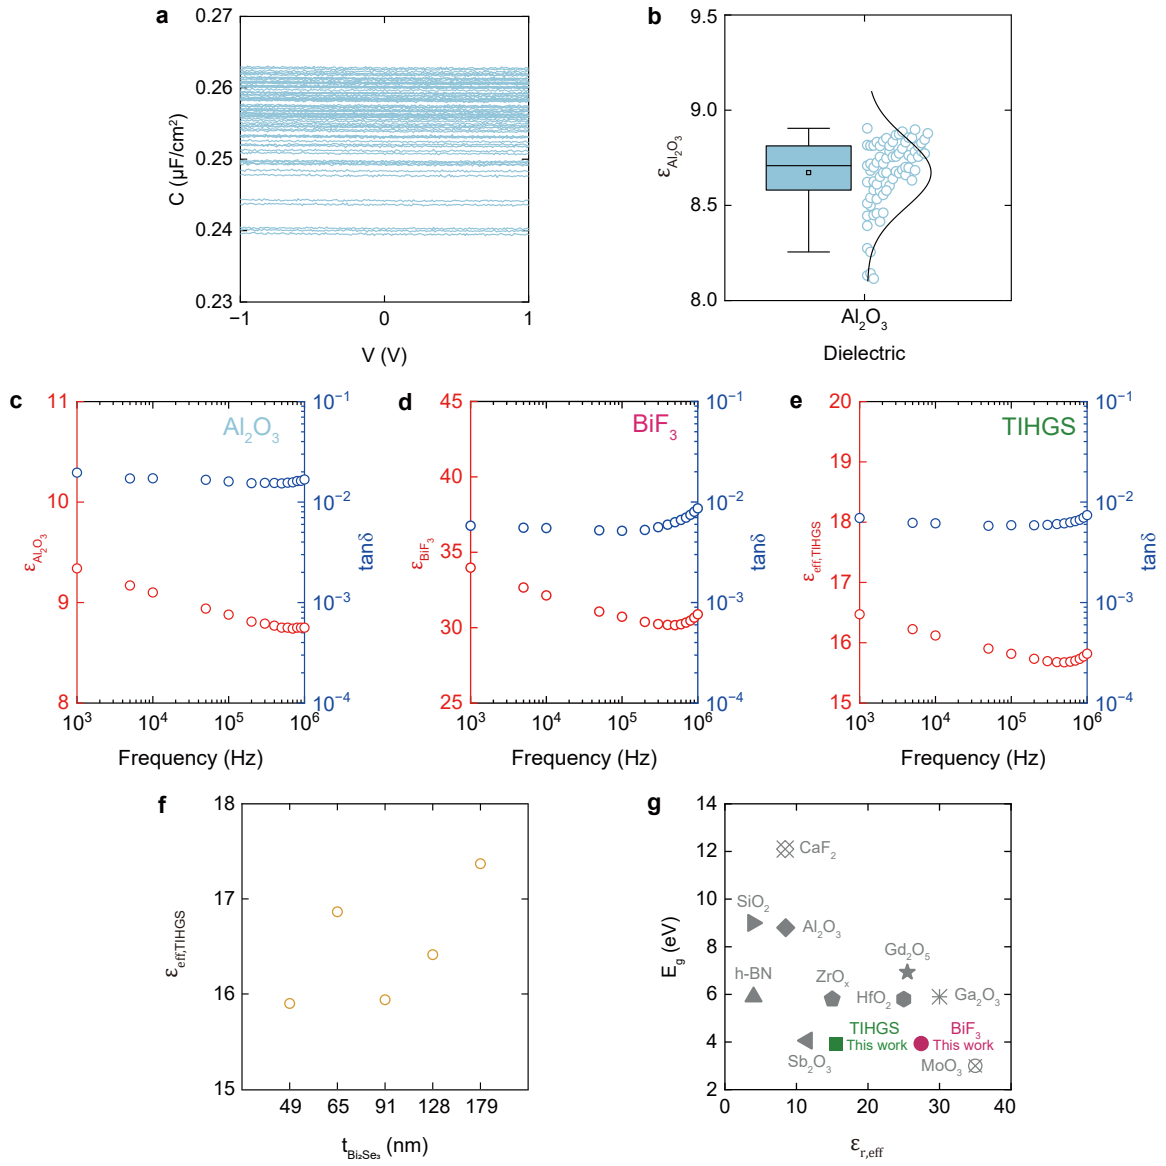

Extended Data Fig. 5 Reference dielectric response, thickness dependence and dielectric-property context of TIHGS electrostatics. **a**, Capacitance–voltage (C – V) characteristics of Au/Ag/Pt/ Al_2O_3 /Au/Ti MIM reference capacitors measured at 1 MHz with a 0.05-V AC excitation ($n = 75$). **b**, Distribution of the extracted Al_2O_3 relative permittivity; mean and median values are 8.67 and 8.71. This reference response was used to de-embed the Al_2O_3 series contribution from the polycrystalline capacitor structures in Fig. 3f,g. **c–e**, Frequency-dependent relative permittivity and loss tangent ($\tan\delta$) of 30-nm Al_2O_3 (**c**), 30-nm Al_2O_3 /23-nm BiF_3 -only (p20) (**d**), and 30-nm Al_2O_3 /TIHGS-43 (p50) (**e**). **f**, Effective relative permittivity $\epsilon_{\text{eff,TIHGS}}$ of TIHGS-43 (cN) versus nominal starting c- Bi_2Se_3 thickness. $\epsilon_{\text{eff,TIHGS}}$ remains ~ 15.9 – 17.4 as the starting thickness varies from ~ 49 to ~ 179 nm, without systematic thickness dependence. **g**, Band gap (E_g) versus relative permittivity for BiF_3 , the TIHGS and representative gate dielectrics [5]. For the TIHGS, the abscissa is the BiF_3 -thickness-normalized stack response $\epsilon_{\text{eff,TIHGS}}$ and the ordinate is the amorphous- BiF_3 band gap; the marker therefore provides dielectric-property context rather than an intrinsic material dielectric constant or EOT advantage.

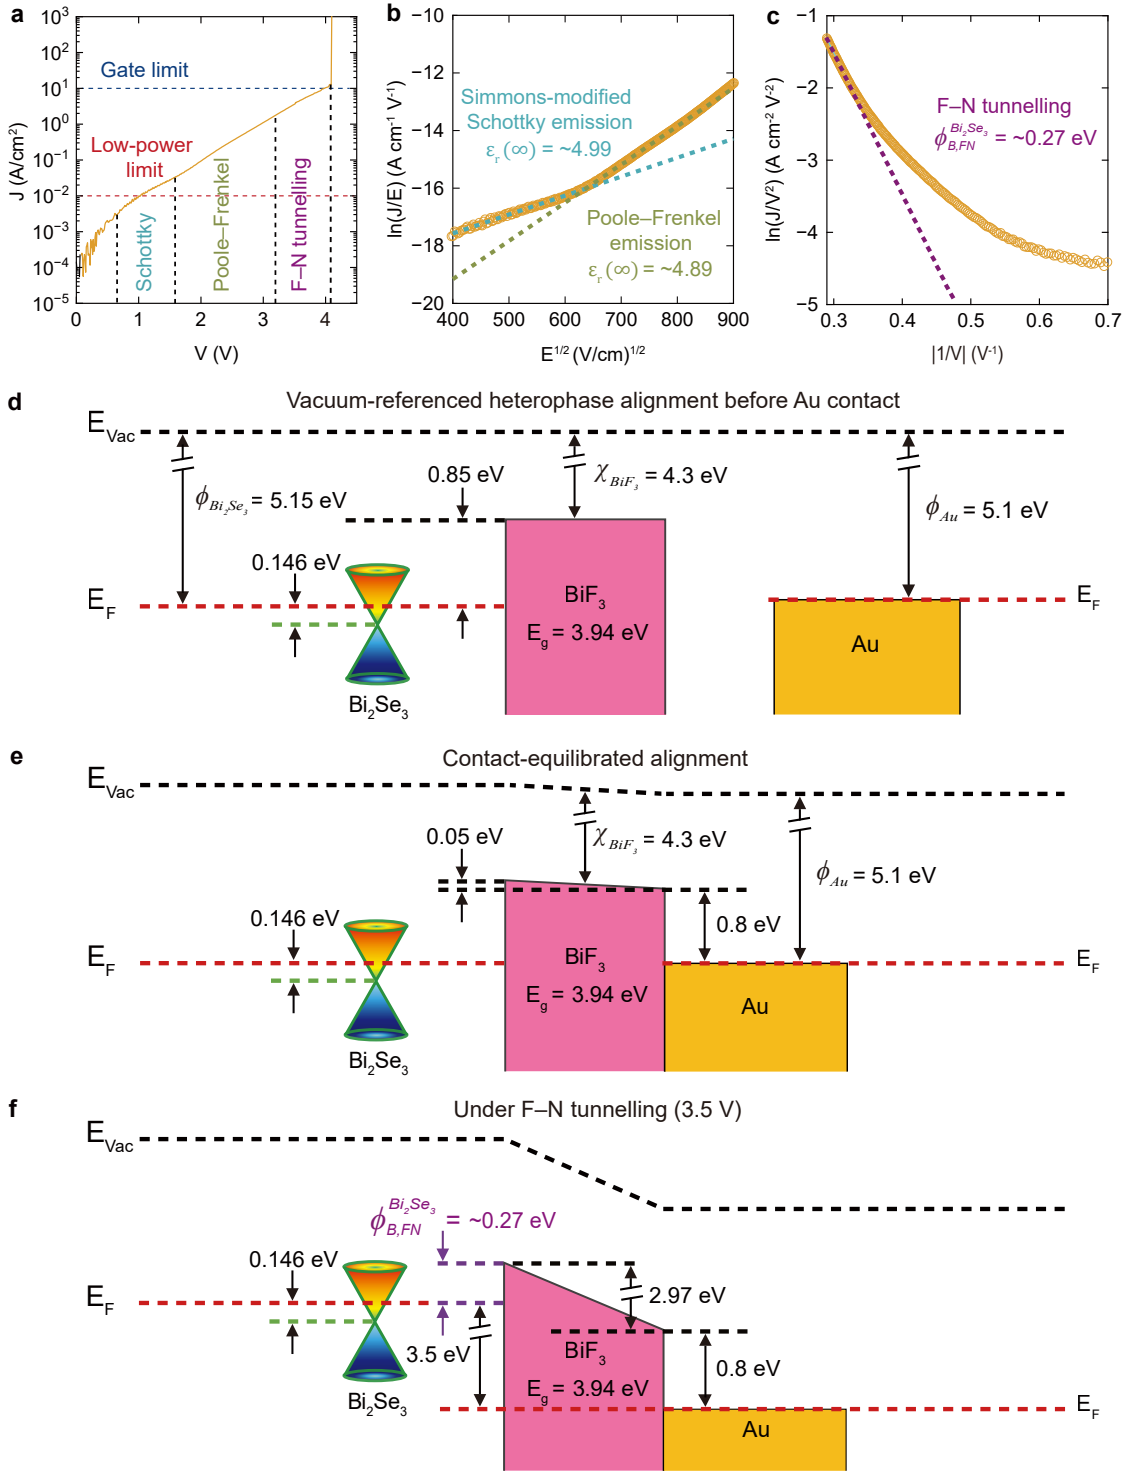

Extended Data Fig. 6 Field-assisted leakage and band alignment of the TIHGS MIM capacitor. **a**, Current-density–voltage (J – V) characteristic of an Au/BiF₃/Bi₂Se₃/Au/Ti TIHGS MIM capacitor, with the low-power operating range and higher-field transport regimes indicated. **b**, Simmons-modified Schottky and Poole–Frenkel representations, yielding effective high-frequency relative permittivities of ~ 4.99 and ~ 4.89 , respectively. **c**, Fowler–Nordheim representation of the high-field regime; the linear region gives a model-dependent effective injection barrier $\Phi_{B, FN} \approx 0.27$ eV. **d**, Vacuum-referenced heterophase alignment before Au contact, constructed from $\phi_{Bi_2Se_3} = 5.15$ eV and $\chi_{BiF_3} = 4.3$ eV, giving a nominal 0.85-eV separation. The reconstructed Bi₂Se₃-derived feature is shown ~ 0.146 eV below E_F . This reference construction does not independently resolve interface dipoles, chemical reconstruction or band bending. **e**, Contact-equilibrated schematic after Au contact. With $\phi_{Au} = 5.1$ eV, the Au/Bi₂Se₃ work-function difference is ~ 0.05 eV and the vacuum-referenced Au/BiF₃ separation ~ 0.8 eV; these values are not interpreted as independently measured equilibrium band offsets. **f**, High-field band profile at $V = 3.5$ V. Barrier tilting enables tunnelling towards BiF₃ conduction-band states, with the Fowler–Nordheim slope yielding an effective Bi₂Se₃-to-BiF₃ injection barrier of ~ 0.27 eV.

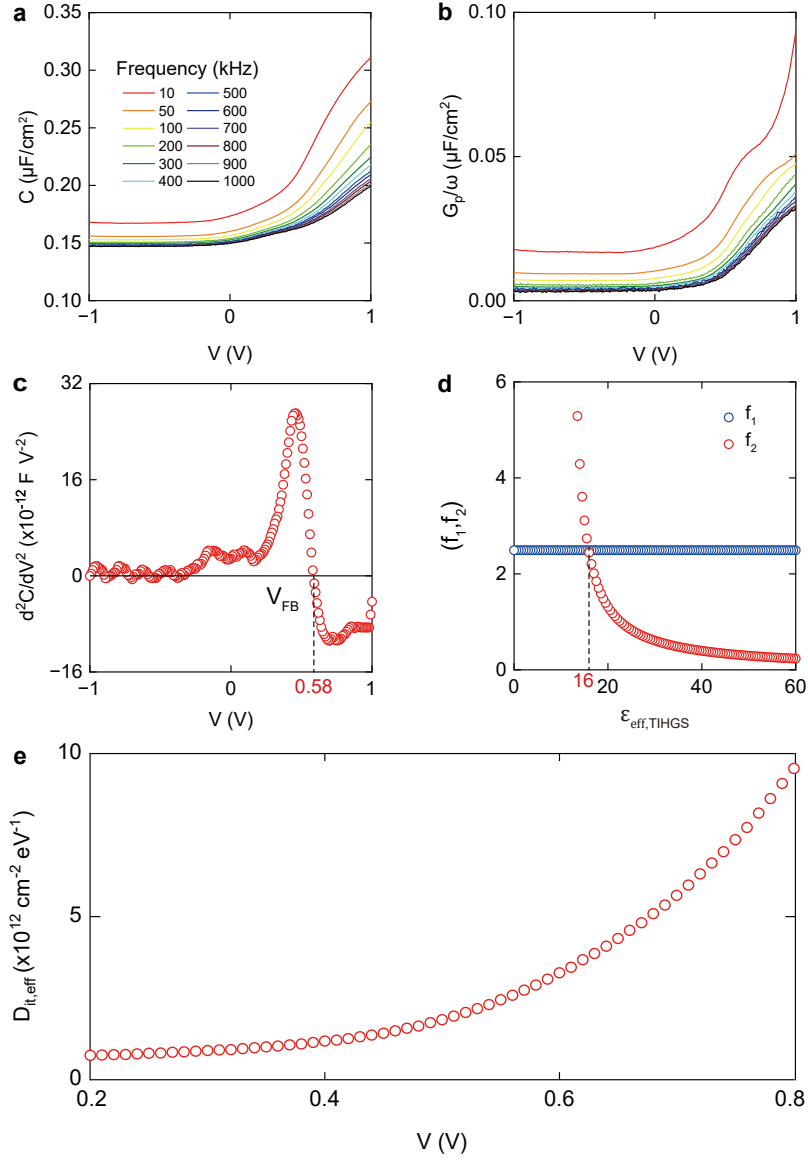

Extended Data Fig. 7 Semiconductor-integrated electrostatics of a WSe₂/TIHGS MISCAP. **a**, Capacitance-voltage (C - V) characteristics of an Au/Ag/Pt/WSe₂/BiF₃/Bi₂Se₃/Au/Ti MISCAP measured from 10 kHz to 1 MHz over the gate-voltage range $-1 \text{ V} \leq V_G \leq 1 \text{ V}$ using an AC excitation amplitude of 0.05 V. **b**, Corresponding parallel-conductance response, G_p/ω , as a function of gate voltage at different measurement frequencies. No well-resolved G_p/ω maximum suitable for conventional conductance-method extraction is observed within the accessible low-leakage bias window. **c**, Second derivative of the 10-kHz C - V characteristic used to determine the flat-band voltage. The physically relevant zero crossing associated with the principal accumulation-to-depletion inflection gives $V_{\text{FB}} \approx 0.58 \text{ V}$. At higher frequencies, the corresponding transition extends beyond the accessible low-leakage bias range and is therefore not used for flat-band extraction. **d**, Graphical consistency analysis of the TIHGS response at the independently determined V_{FB} . The experimentally determined function f_1 is compared with f_2 calculated as a function of trial $\epsilon_{\text{eff,TIHGS}}$, with the intersection yielding $\epsilon_{\text{eff,TIHGS}} \approx 16$. **e**, Effective electrically active trap density ($D_{\text{it,eff}}$) obtained from the 10-kHz and 1-MHz C - V characteristics using the high-low-frequency capacitance method. Quantitative interpretation is restricted to the bias-dependent depletion-to-accumulation transition, excluding the nearly gate-voltage-independent depletion floor and strong-accumulation regimes. The minimum value within the selected analysis range is $\sim 7.48 \times 10^{11} \text{ cm}^{-2} \text{ eV}^{-1}$.


Extended Data Table 2 Electrostatic response of BiF₃ and TIHGS structures and parameters extracted from the WSe₂/TIHGS MISCAP. **a**, Experimentally extracted dielectric response of BiF₃ and TIHGS capacitor structures. For TIHGS structures, $\epsilon_{\text{eff, TIHGS}}$ denotes the BiF₃-thickness-normalized effective relative permittivity of the complete BiF₃/Bi₂Se₃ electrostatic boundary system and should not be interpreted as the intrinsic dielectric constant of BiF₃. For the fully converted BiF₃-only (p20) reference, ϵ_{BiF_3} was extracted using the independently measured post-conversion BiF₃ thickness of ~ 23 nm. TIHGS-13 and TIHGS-43 denote structures containing ~ 13 - and ~ 43 -nm-thick converted BiF₃ layers, respectively; p20 and p50 denote nominal starting polycrystalline Bi₂Se₃ thicknesses of 20 and 50 nm, respectively; and cN denotes crystalline Bi₂Se₃ with nominal starting thickness N . **b**, Electrostatic parameters extracted from the Au/Ag/Pt/WSe₂/BiF₃/Bi₂Se₃/Au/Ti MISCAP. Flat-band quantities were obtained from the 10-kHz C - V characteristic. C_g denotes the effective TIHGS capacitance corresponding to $\epsilon_{\text{eff, TIHGS}} \approx 16$ and a ~ 43 -nm-thick converted BiF₃ layer. $L_{\text{D, eff}}$ and N_{app} denote the effective semiconductor screening length and apparent majority-carrier concentration, respectively, evaluated using $\epsilon_{\perp, \text{WSe}_2} = 4.2$, as adopted in continuum electrostatic modelling of bulk-like WSe₂ flakes [38]. $D_{\text{it, eff}}^{\text{min}}$ denotes the minimum effective electrically active trap density extracted from the 10-kHz/1-MHz high-low-frequency analysis within the selected bias-dependent transition region. Detailed extraction procedures and limitations are provided in Supplementary Notes 6 and 7.

a, Dielectric response of BiF₃ and TIHGS

Structure	Sample configuration	Electrostatic quantity	Value
Crystalline	TIHGS-43 (cN)	Mean $\epsilon_{\text{eff, TIHGS}}$	16.50
TIHGS MIM	$N = 49, 65, 91, 128, \text{ or } 179$ nm	Median $\epsilon_{\text{eff, TIHGS}}$	16.41
WSe ₂ /TIHGS MISCAP	Au/Ag/Pt/WSe ₂ /a-BiF ₃ /c-Bi ₂ Se ₃ /Au/Ti (~ 43 -nm converted BiF ₃)	$\epsilon_{\text{eff, TIHGS}}$	~ 16
Polycrystalline TIHGS MIM	TIHGS-13 (p20)	Mean $\epsilon_{\text{eff, TIHGS}}$	16.12
		Median $\epsilon_{\text{eff, TIHGS}}$	16.10
	TIHGS-43 (p50)	Mean $\epsilon_{\text{eff, TIHGS}}$	14.83
		Median $\epsilon_{\text{eff, TIHGS}}$	14.72
Fully converted BiF ₃ -only MIM	BiF ₃ -only (p20) ($t_{\text{BiF}_3} \approx 23$ nm)	Mean ϵ_{BiF_3}	28.65
		Median ϵ_{BiF_3}	30.16

b, Electrostatic parameters extracted from the WSe₂/TIHGS MISCAP

t_{WSe_2} (nm)	V_{FB} (V)	C_{FB} (10^{-7} F cm $^{-2}$)	C_g (10^{-7} F cm $^{-2}$)	$L_{\text{D, eff}}$ (nm)	N_{app} (10^{17} cm $^{-3}$)	$D_{\text{it, eff}}^{\text{min}}$ (10^{11} cm $^{-2}$ eV $^{-1}$)
37.37	0.58	2.34	3.29	4.60	2.83	7.48

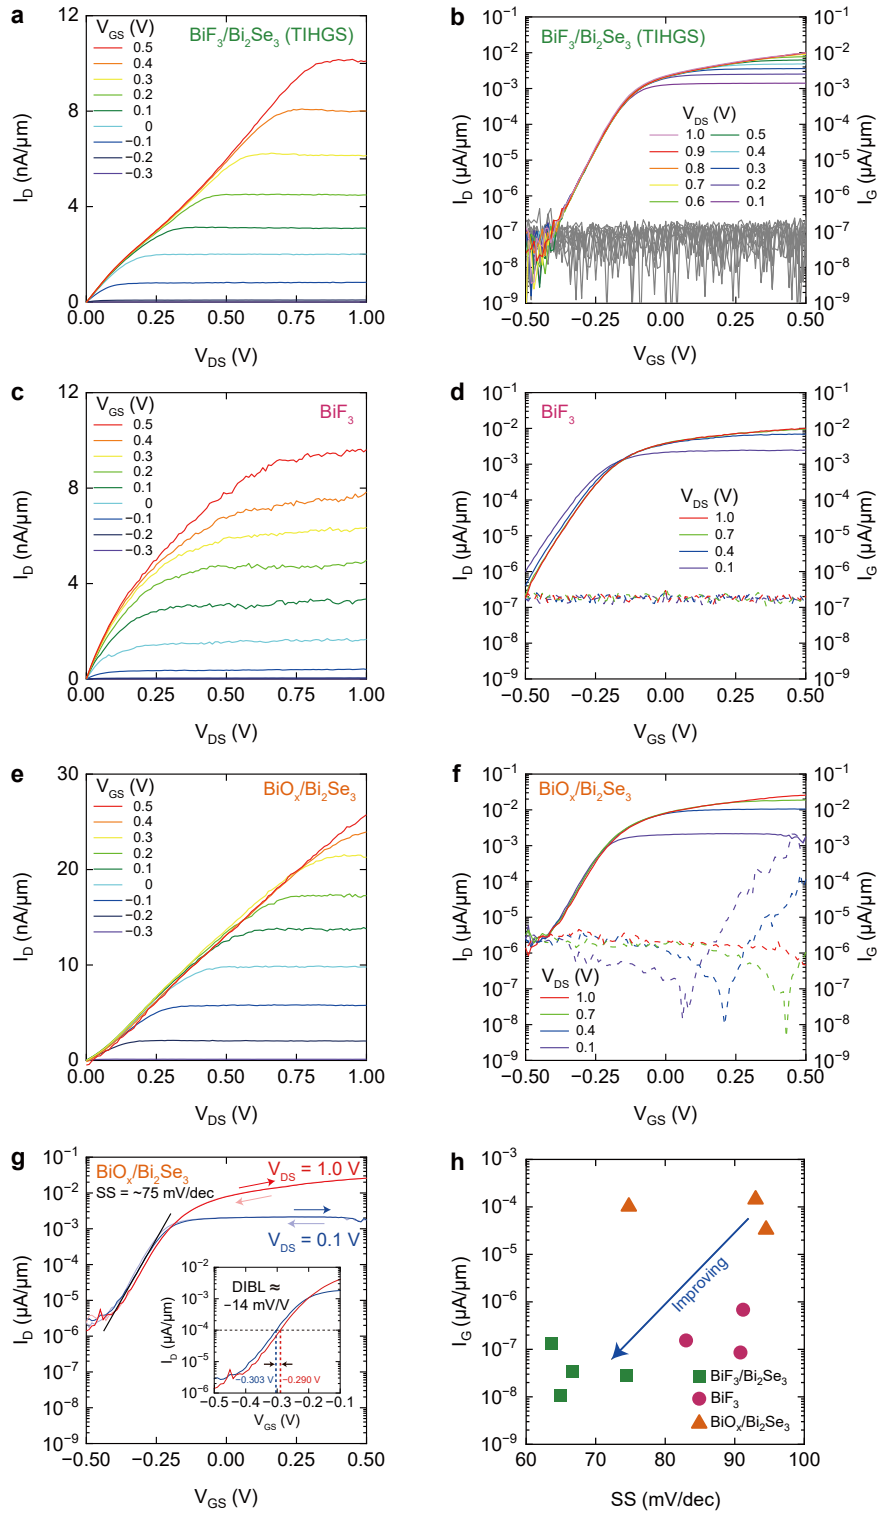

Extended Data Fig. 8 Extended transistor characteristics, control devices and device-to-device comparison. **a–f**, Output characteristics (**a,c,e**) and drain-bias-dependent transfer characteristics (**b,d,f**) of TIHGS-gated (**a,b**), BiF₃-only-gated (**c,d**) and air-oxidized BiO_x/Bi₂Se₃-gated (**e,f**) MoS₂ FETs. Simultaneously measured gate-leakage currents are shown in **b,d,f**. **g**, Forward and reverse transfer characteristics of the BiO_x/Bi₂Se₃-gated control at $V_{DS} = 0.1$ and 1.0 V, complementing the corresponding TIHGS and BiF₃-only measurements in Fig. 4b,d. Arrows indicate the gate-voltage sweep direction. The device exhibits a minimum SS of ~ 75 mV dec⁻¹ and an on-off current ratio of $\sim 10^4$. Inset, constant-current extraction from the forward sweeps at $I_D = 100$ pA μm^{-1} , yielding a signed $DIBL \approx -14$ mV V⁻¹. **h**, Device-to-device comparison of minimum SS extracted from forward transfer characteristics at $V_{DS} = 0.1$ V and width-normalized gate leakage evaluated at $V_{GS} = 0.5$ V and $V_{DS} = 0.1$ V.

Supplementary Information

Supplementary Note 1. Screening-Boundary Relocation as an Electrostatic Design Variable

A gate stack is commonly described by the capacitance of its bulk dielectric, but the gate electric field is ultimately screened at finite electronic and interfacial boundaries. For the two-dimensional (2D) semiconductor transistors considered here, a conventional stack can be represented as

$$\frac{1}{C_{g,\text{conv}}} = \frac{1}{C_{d,g}} + \frac{1}{C_{\text{ins}}} + \frac{1}{C_{d,\text{ch}}} + \frac{1}{C_{\text{vdW}}},$$

where $C_{d,g}$ denotes the effective gate-side interfacial response of the electrode/dielectric boundary, $C_{d,\text{ch}}$ denotes the corresponding dielectric/channel interfacial response, and C_{vdW} denotes the geometric van der Waals (vdW)-gap contribution. In particular, $C_{d,g}$ can incorporate finite electrode screening together with interface-specific bonding, polarization, chemical reconstruction and structural disorder. These gate-side contributions need not scale proportionally with the physical dielectric thickness and can therefore become increasingly important as the bulk-insulator capacitance increases during equivalent oxide thickness (*EOT*) scaling [1–5]. The bias-dependent semiconductor-body response is treated separately from the gate-stack contribution defined above. Thus, even for an intrinsically high- κ dielectric, the complete gate response depends on the electronic character and spatial position of the boundaries at which screening charge is established.

The topological-insulator heterophase gate stack (TIHGS) changes this gate-side boundary condition by separating dielectric isolation from the location of electronic screening. Amorphous BiF_3 (a- BiF_3) provides the insulating barrier facing the semiconductor channel, whereas residual conducting crystalline Bi_2Se_3 (c- Bi_2Se_3) remains electrically coupled to the gate electrode. Position-resolved calculations further show that the structural a- BiF_3 /c- Bi_2Se_3 interface is gap-opened while an electronically active gap-closed state is reconstructed in the adjacent c- Bi_2Se_3 subinterface layer. We therefore use the term “buried screening boundary” for this heterophase-associated electronic boundary region rather than for an ideal atomically sharp chemical interface. For the 2D devices studied here, the corresponding stack contribution is

$$\frac{1}{C_{g,\text{TIHGS}}} = \frac{1}{C_Q} + \frac{1}{C_{\text{BiF}_3}} + \frac{1}{C_{d,\text{ch}}} + \frac{1}{C_{\text{vdW}}},$$

where C_Q represents the effective electronic-compressibility response associated with the buried electronic boundary. At the level of this reduced electrostatic model, the defining change is therefore $C_{d,g} \rightarrow C_Q$. This notation describes a change in the physical origin, location and electronic character of the gate-side series response; it does not imply that the series contribution is eliminated or that C_Q necessarily exceeds $C_{d,g}$.

Finite C_Q contributes in series with C_{BiF_3} , lowering the nominal TIHGS capacitance. In the representative transistor comparison, the TIHGS- and BiF_3 -only-gated devices have closely matched insulating-layer thicknesses and a common $\text{BiF}_3/\text{MoS}_2$ channel-side material interface. The TIHGS combines lower subthreshold swing (*SS*) and smaller hysteresis with substantially weaker subthreshold drain-bias dependence. Constant-current analysis of the forward sweeps at the common width-normalized drain current $I_D = 10 \text{ pA } \mu\text{m}^{-1}$ gives signed drain-induced barrier lowering (*DIBL*) coefficients of approximately +3 and −41 mV V^{-1} for the TIHGS and BiF_3 -only devices, respectively (Fig. 4f; Methods). The smaller $|DIBL|$ of the TIHGS accompanies improved switching despite its lower nominal capacitance, supporting screening-boundary identity and location as gate-stack design variables complementary to dielectric thickness and permittivity.

Screening-boundary engineering is complementary to, rather than a substitute for, semiconductor-side interface engineering. Channel-side trapping, fixed charge, dielectric disorder and remote-polar-phonon coupling remain relevant to transistor performance [6–8]. The present device comparison retains the same $\text{BiF}_3/\text{MoS}_2$ channel-side material interface while changing the gate-side boundary condition, thereby allowing the functional consequence of screening-boundary identity and location to be tested separately from a simple change in dielectric thickness or nominal capacitance.

Supplementary Note 2. Fluorine Penetration and Self-Limited Surface Conversion

SF₆-based processing of Bi₂Se₃ is known to produce a fluorinated, BiF₃-rich insulating surface layer [21]. To examine whether fluorine penetration can provide a characteristic length scale for the experimentally observed self-limited surface conversion, we performed stopping and range of ions in matter (SRIM) simulations [35]. SRIM treats energetic-ion transport through binary-collision physics, including nuclear and electronic stopping, and provides the depth distribution, projected range, and range straggling of implanted ions. Although SRIM does not reproduce the chemical conversion of Bi₂Se₃ into BiF₃, it provides a useful kinematic estimate of the depth over which energetic fluorine can be delivered into Bi₂Se₃. Comparison of this ballistic penetration scale with the experimentally observed conversion depth therefore provides a qualitative test of whether fluorine delivery can contribute to defining the spatial extent of the reaction front.

The ion-energy distribution incident on a surface in a radio-frequency (RF)-driven capacitively coupled plasma (CCP) is generally not represented by a single energy. RF sheath modulation, electrode asymmetry and self-bias, collisional transport through the sheath, and charge-exchange processes can broaden and reshape the ion-energy distribution at the sample surface [39–41]. In electronegative SF₆-containing plasmas, negative-ion formation can additionally modify the plasma potential and sheath structure [42, 43]. Furthermore, as the electrically insulating fluoride layer develops during conversion, surface charging and evolution of the reacted layer can modify the local sheath and subsequent ion-bombardment conditions. Because the ion-energy distribution was not measured directly in our plasma system, we do not assign individual SRIM energies to specific experimental ion populations.

We therefore calculated F⁺ depth distributions at incident energies of 0.5, 1, 2.5, and 5 keV to examine how the accessible ballistic penetration length scale evolves with increasing ion energy. The 5-keV calculation represents a deliberately high-energy upper-bound case rather than an assertion that 5-keV F⁺ ions constitute the dominant ion population under the experimental plasma conditions. Although the experiments employed an SF₆/Ar plasma containing multiple ionic and neutral reactive species, the simulations were simplified to F⁺ projectiles to isolate the ballistic contribution associated specifically with fluorine delivery. Neutral fluorine radicals, chemical transport, and subsequent solid-state diffusion are not represented by this calculation.

The calculated fluorine depth distributions broaden systematically with increasing incident energy (Extended Data Fig. 1). At lower energies, implanted F remains concentrated in the near-surface region, whereas the 5-keV distribution develops an extended tail approaching the ~40-nm depth scale of the experimentally observed saturated converted layer (Extended Data Fig. 1). The correspondence between the high-energy ballistic penetration envelope and the independently measured saturation thickness provides an important qualitative clue to the origin of the self-limited conversion depth. Specifically, it shows that a tens-of-nanometres reaction depth is physically accessible to energetic fluorine while suggesting that finite fluorine penetration can help define the maximum spatial extent of the conversion front.

This interpretation is also consistent with the experimentally observed evolution of the converted layer. During the initial stages of SF₆ exposure, fluorine can access and react with the near-surface Bi₂Se₃, rapidly increasing the converted-layer thickness. As an insulating BiF₃ layer progressively develops, fluorine delivery to the underlying unconverted Bi₂Se₃ is expected to become increasingly restricted, while the remaining accessible ballistic and chemically assisted fluorine flux decreases with depth. The combination of a finite fluorine-penetration window and progressive transport limitation through the reacted layer therefore provides a physically plausible explanation for the rapid initial conversion followed by saturation at a characteristic thickness of approximately 40–43 nm.

SRIM itself does not provide a quantitative model of this coupled process. It does not include chemical reactions or BiF₃ phase formation, transport of neutral reactive species, fluorine diffusion, sputter erosion, dynamic changes in target composition and density, plasma-sheath evolution, surface charging, or charge-exchange processes. These mechanisms can modify both fluorine delivery and movement of the reaction front. Nevertheless, the overlap between the calculated high-energy ballistic penetration envelope and the experimentally observed saturation scale is consistent with fluorine penetration contributing to the characteristic conversion depth, while not establishing penetration as the sole or rate-limiting mechanism of the self-limited fluorination process.

Supplementary Note 3. Electronic Structure of the Buried Heterophase Boundary

In the pristine Bi_2Se_3 slab comprising six quintuple layers (QLs), the position-resolved electronic-structure calculations in Fig. 3 were used to establish the reference electronic boundary before surface conversion. Bi_2Se_3 is a prototypical three-dimensional topological insulator whose bulk topology gives rise to a Dirac-like surface state within the bulk band gap [15–17]. Consistent with this established picture, the pristine slab exhibits a Dirac-like surface state within the calculated 0.31-eV bulk gap, with its Dirac point (E_D) approximately 0.043 eV below the Fermi level (E_F) (Fig. 3a,b).

Formation of the a- BiF_3 /c- Bi_2Se_3 heterophase boundary produces a strongly position-dependent electronic reconstruction. The electronic states projected onto the immediate heterophase interface are gap-opened by approximately 0.72 eV, whereas the adjacent c- Bi_2Se_3 subinterface QL develops a reconstructed gap-closed Bi_2Se_3 -derived Dirac-like feature centred approximately 0.146 eV below E_F , together with finite spectral weight extending to the Fermi level (Fig. 3c,d). The surface QL at the opposite side of the slab retains a pristine-like Dirac dispersion. Thus, the ~ 0.146 -eV value specifies the energetic position of the reconstructed subinterface feature relative to E_F and is not an interfacial band gap. More importantly, the calculations show that the chemical heterophase interface and the electronically active boundary are spatially distinct: surface conversion opens the immediate interface while relocating a gap-closed Bi_2Se_3 -derived electronic response into the adjacent subinterface layer.

The calculated dipole-moment profile across the a- BiF_3 /c- Bi_2Se_3 structure is sharply localized near the heterophase boundary (Fig. 3e). This localization is consistent with interfacial charge redistribution and with a local electrostatic contribution to the energetic reconstruction of the Bi_2Se_3 -derived state. We do not assign the shift of the Dirac-like feature from ~ 0.043 to ~ 0.146 eV uniquely to the interface dipole, because local bonding, chemical reconstruction and band bending are not separately decomposed. Rather, the interface-localized dipole and the position-resolved band reconstruction provide complementary microscopic evidence that the electronic boundary is reorganized by formation of a- BiF_3 . This physical picture is consistent with previous reports that surface modification or etching of Bi_2Se_3 can displace or reconstruct its surface-state distribution [18, 21].

A finite electronic density of states at the Fermi level provides a microscopic basis for finite electronic compressibility and quantum capacitance,

$$C_Q = e^2 D(E_F)$$

in the zero-temperature limit. The calculated near- E_F spectral weight of the subinterface boundary is therefore consistent with the finite C_Q extracted independently from the TIHGS capacitance measurements. The relevance of this response is not that C_Q increases the total gate capacitance—it does not. Rather, finite electronic compressibility allows the heterophase-induced buried boundary to support screening charge while the underlying c- Bi_2Se_3 remains electrically coupled to the external gate electrode. In this sense, C_Q is treated as an electrostatic signature of the relocated electronically active boundary rather than as an intrinsic dielectric contribution of BiF_3 or a capacitance-enhancement mechanism.

The calculations do not constitute an independent determination of the topological invariant of the chemically reconstructed interface. We do not extract an interface-specific Z_2 invariant or explicitly calculate the spin texture of the reconstructed subinterface state. We therefore interpret the calculations conservatively as evidence for a reconstructed Bi_2Se_3 -derived Dirac-like electronic boundary whose relation to topological-insulator bulk–boundary physics is motivated by the established bulk topology of Bi_2Se_3 . Additional chemically induced, band-bending-related or reconstructed states may coexist and contribute to the experimentally extracted electronic compressibility.

Supplementary Note 4. Effective Quantum-Capacitance Extraction and Model Assumptions

The effective quantum-capacitance contribution of the buried $\text{BiF}_3/\text{Bi}_2\text{Se}_3$ boundary was estimated by comparing the measured TIHGS capacitance with the dielectric capacitance expected for BiF_3 . Throughout this analysis, all capacitances are expressed per unit area. The TIHGS response was represented as

$$\frac{1}{C_{\text{TIHGS}}} = \frac{1}{C_Q} + \frac{1}{C_{\text{BiF}_3}},$$

where

$$C_{\text{BiF}_3} = \frac{\epsilon_0 \epsilon_{\text{BiF}_3}}{t_{\text{BiF}_3}}.$$

Here C_Q denotes an effective electronic-compressibility contribution associated with the buried electronically active boundary. It is a finite series response and should not be interpreted as an intrinsic dielectric property of BiF_3 , a universal material constant, or a capacitance-enhancement term.

The BiF_3 dielectric response used for this analysis was obtained from the fully converted BiF_3 -only (p20) reference. This structure was formed from a nominally 20-nm-thick polycrystalline Bi_2Se_3 film and exhibited an independently measured post-conversion BiF_3 thickness of ~ 23 nm. Using this physical thickness, the measured capacitor statistics yield a mean relative permittivity $\epsilon_{\text{BiF}_3} = 28.65$ and a median value of 30.16. The mean value was used as the reference BiF_3 dielectric response for the primary C_Q extraction below. This extraction assumes that the converted BiF_3 region within the TIHGS has the same dielectric response as the fully converted BiF_3 -only reference. Any systematic difference in the local structure, density, composition, or dielectric response of BiF_3 between the partially and fully converted configurations would renormalize the extracted C_Q . Accordingly, the reported C_Q values should be regarded as effective interfacial quantum-capacitance responses within this reference-based series-capacitance model rather than as model-independent microscopic constants.

For the TIHGS-13 (p20) structure,

$$C_{\text{TIHGS}} = 1.10 \mu\text{F cm}^{-2}$$

and, using $t_{\text{BiF}_3} \approx 13$ nm,

$$C_{\text{BiF}_3} = 1.95 \mu\text{F cm}^{-2},$$

yielding

$$C_Q = \left(\frac{1}{C_{\text{TIHGS}}} - \frac{1}{C_{\text{BiF}_3}} \right)^{-1} \approx 2.52 \mu\text{F cm}^{-2}.$$

For the TIHGS-43 (p50) structure,

$$C_{\text{TIHGS}} = 0.305 \mu\text{F cm}^{-2}$$

and, using $t_{\text{BiF}_3} \approx 43$ nm,

$$C_{\text{BiF}_3} = 0.590 \mu\text{F cm}^{-2},$$

giving

$$C_Q \approx 0.631 \mu\text{F cm}^{-2}.$$

As a sensitivity check, using the median BiF_3 relative permittivity of 30.16 instead of the mean value gives $C_Q \approx 2.37 \mu\text{F cm}^{-2}$ for TIHGS-13 (p20) and $C_Q \approx 0.599 \mu\text{F cm}^{-2}$ for TIHGS-43 (p50). Thus, the inference of a finite interfacial electronic-compressibility contribution is not sensitive to whether the mean or median BiF_3 reference permittivity is used.

The finite C_Q explains why the measured TIHGS capacitance is lower than that expected from BiF_3 alone. Accordingly, the present MIM measurements do not demonstrate a net capacitance or *EOT* advantage of the TIHGS structure over the BiF_3 -only reference. Nor do they independently determine the magnitude of the conventional metal/ BiF_3 gate-side interfacial capacitance, $C_{\text{d,g}}$, and therefore they do not establish that $C_Q > C_{\text{d,g}}$. Within this reference-based series-capacitance model, the capacitance measurements instead require a finite additional series response associated with the buried heterophase boundary.

The distinction between C_Q and a conventional gate-side interfacial or dead-layer capacitance is therefore primarily one of physical origin and boundary identity rather than the existence versus absence of a

finite series term. Finite gate-electrode/dielectric interfacial responses are well established as non-scaling contributions to deeply scaled gate-stack electrostatics [1, 3]. Conventional gate-side contributions can arise from finite electrode screening, altered interfacial polarizability, bonding, chemical reconstruction, or structural disorder. In the TIHGS architecture, the metal electrode is electrically coupled to residual Bi_2Se_3 , so the conventional metal/ BiF_3 interface no longer defines the active gate-side screening boundary. The remaining C_Q instead characterizes the effective electronic compressibility of the deliberately formed $\text{BiF}_3/\text{Bi}_2\text{Se}_3$ boundary. Thus, “boundary relocation” rather than “elimination of all interfacial capacitance” is the appropriate electrostatic description. The transistor comparison in Fig. 4 separately evaluates whether changing this boundary condition has a functional consequence for gate control.

The differing C_Q values obtained for the two conversion geometries indicate that the extracted quantity depends on the microscopic electronic structure and electrostatic environment of the reconstructed boundary rather than representing a universal material parameter. This interpretation is consistent with the position-resolved electronic-structure calculation in Fig. 3d, which predicts finite Bi_2Se_3 -derived spectral weight at the Fermi level near the buried heterophase boundary.

An independent constraint on the spatial origin of this additional series-capacitance response is provided by the crystalline TIHGS-43 (cN) structures. When the nominal starting crystalline Bi_2Se_3 thickness is varied from ~ 49 to ~ 179 nm while maintaining approximately the same converted BiF_3 thickness, $\varepsilon_{\text{eff, TIHGS}}$ remains within ~ 15.9 – 17.4 without a systematic thickness dependence (Extended Data Fig. 5f). This weak dependence argues against a dominant electrostatic contribution from the Bi_2Se_3 bulk and is instead consistent with a contribution localized near the $\text{BiF}_3/\text{Bi}_2\text{Se}_3$ boundary.

Capacitance measurements alone cannot uniquely distinguish the reconstructed Bi_2Se_3 -derived boundary state from additional electronic states that may coexist at a band-bent or chemically reconstructed interface. We therefore interpret C_Q conservatively as an effective electronic-compressibility response associated with the buried electronically active boundary. Its finite magnitude, together with the calculated near-Fermi spectral weight, provides mutually consistent electrostatic and microscopic evidence for an electronically compressible buried boundary.

Supplementary Note 5. Field-Assisted Leakage, Band Alignment and Effective Tunnelling Barrier

To examine the field dependence of gate-stack leakage in the TIHGS MIM capacitors, we analysed the current-density–voltage characteristics using field-assisted emission and tunnelling representations, including Simmons-modified Schottky emission, Poole–Frenkel emission, and Fowler–Nordheim tunnelling (Extended Data Fig. 6a–c) [44–46]. The electric field was calculated as

$$E = \frac{|V|}{t_{\text{BiF}_3}},$$

where t_{BiF_3} is the physical thickness of the insulating BiF_3 layer. The electrically conducting Bi_2Se_3 region was not included in the dielectric thickness used for this field conversion. This treatment assumes that the applied voltage drop relevant to high-field transport occurs predominantly across the insulating BiF_3 layer; any additional voltage drop associated with the interfaces is not independently resolved and is therefore incorporated into the effective transport parameters extracted below.

At intermediate electric fields, the data in Extended Data Fig. 6b exhibit approximately linear behaviour when represented as $\ln(J/E)$ versus $E^{1/2}$, consistent with Simmons-modified Schottky and Poole–Frenkel descriptions [44, 46]. The corresponding field-lowering coefficients are

$$\beta_{\text{S}} = \left[\frac{q^3}{4\pi\epsilon_0\epsilon_{\text{r}}(\infty)} \right]^{1/2}$$

for Schottky-type barrier lowering and

$$\beta_{\text{PF}} = \left[\frac{q^3}{\pi\epsilon_0\epsilon_{\text{r}}(\infty)} \right]^{1/2} = 2\beta_{\text{S}}$$

for Poole–Frenkel emission, where q is the elementary charge, ϵ_0 is the vacuum permittivity, and $\epsilon_{\text{r}}(\infty)$ is the ion-clamped high-frequency relative permittivity of the dielectric.

The Simmons-modified Schottky and Poole–Frenkel representations yield $\epsilon_{\text{r}}(\infty) \approx 4.99$ and ≈ 4.89 , respectively, corresponding to refractive indices $n = \sqrt{\epsilon_{\text{r}}(\infty)}$ of ~ 2.23 and ~ 2.21 . These values are reasonably close to the first-principles values calculated for amorphous BiF_3 , $\epsilon_{\text{r}}(\infty) = 4.056$ and $n = 2.014$, providing a consistency check between the field-dependent transport response and the calculated electronic polarizability.

At higher electric fields, the Fowler–Nordheim (F–N) representation becomes dominant [45, 46]. Within the conventional triangular-barrier approximation, the F–N current density can be expressed in the form

$$J_{\text{FN}} \propto E^2 \exp \left[-\frac{4\sqrt{2m_{\text{t}}^*} \Phi_{\text{B, FN}}^{3/2}}{3q\hbar E} \right],$$

where m_{t}^* is the tunnelling effective mass and $\Phi_{\text{B, FN}}$ is the effective electron-injection barrier height. In this expression, $\Phi_{\text{B, FN}}$ is expressed in joules. The corresponding linearized form is

$$\ln \left(\frac{J}{E^2} \right) = A_{\text{FN}} - \frac{4\sqrt{2m_{\text{t}}^*} \Phi_{\text{B, FN}}^{3/2}}{3q\hbar} \frac{1}{E},$$

where A_{FN} contains the field-independent prefactor.

Because the BiF_3 thickness is fixed for a given MIM capacitor and $E = |V|/t_{\text{BiF}_3}$, the equivalent voltage-domain representation used in Extended Data Fig. 6c is

$$\ln \left(\frac{J}{V^2} \right) = A'_{\text{FN}} - \frac{4t_{\text{BiF}_3} \sqrt{2m_{\text{t}}^*} \Phi_{\text{B, FN}}^{3/2}}{3q\hbar} \frac{1}{|V|}.$$

For a fixed capacitor area, replacing current density J with total current I changes only the intercept and not the slope. Accordingly, if S_{FN} denotes the slope of the linear high-field region in a plot of $\ln(I/V^2)$

768 versus $1/|V|$, the effective F–N barrier height is obtained from

$$\Phi_{\text{B,FN}} = \left[\frac{3q\hbar|S_{\text{FN}}|}{4t_{\text{BiF}_3}\sqrt{2m_t^*}} \right]^{2/3}.$$

769 The quantity obtained from this equation is an energy in joules and was divided by q to report it in
770 electronvolts.

771 For the Au/BiF₃/Bi₂Se₃/Au/Ti TIHGS MIM capacitor analysed in Extended Data Fig. 6a–c, $t_{\text{BiF}_3} \approx$
772 43 nm. We adopted $m_t^* = 0.25m_0$ as a representative tunnelling mass within the range reported for high-
773 κ dielectrics, where m_0 is the free-electron mass [47]. Using the slope of the high-field linear regime gives
774 an effective F–N barrier height of

$$\Phi_{\text{B,FN}} \approx 0.27 \text{ eV}.$$

775 The high-field transport analysis must be distinguished from the equilibrium microscopic electronic
776 structure of the heterophase boundary. Figure 3c–e shows that the immediate a-BiF₃/c-Bi₂Se₃ interface
777 is gap-opened, whereas a reconstructed gap-closed Bi₂Se₃-derived state resides in the adjacent c-Bi₂Se₃
778 subinterface QL and the calculated dipole-moment profile is strongly localized near the heterophase
779 boundary. The localized dipole establishes interfacial charge redistribution but does not by itself determine
780 the magnitude of the reconstructed-state energy shift. The band alignment of the heterophase therefore
781 cannot, in general, be represented solely by rigid alignment of isolated-material electron affinity and work
782 function.

783 Extended Data Fig. 6d shows a vacuum-referenced constituent alignment before Au contact. Using
784 the calculated Bi₂Se₃ work function $\phi_{\text{Bi}_2\text{Se}_3} = 5.15 \text{ eV}$ and amorphous-BiF₃ electron affinity $\chi_{\text{BiF}_3} =$
785 4.3 eV gives a nominal separation of approximately 0.85 eV between the Bi₂Se₃ Fermi level and the
786 BiF₃ conduction-band reference. This value is a vacuum-level reference construction rather than an exact
787 equilibrium conduction-band offset, because the interface dipole, chemical reconstruction and associated
788 band bending can modify the local electrostatic potential. The reconstructed Bi₂Se₃-derived subinterface
789 feature identified in Fig. 3d is therefore shown separately at approximately 0.146 eV below E_{F} .

790 After Au contact, the electrochemical potentials equilibrate across the contacted stack (Extended
791 Data Fig. 6e). The Au work function, $\phi_{\text{Au}} = 5.1 \text{ eV}$, differs from the calculated Bi₂Se₃ work function
792 by only approximately 0.05 eV, whereas the corresponding vacuum-referenced Au/BiF₃ separation is
793 approximately 0.8 eV. These quantities provide a reference energetic sequence for the contacted capacitor
794 but do not imply that the local heterophase or metal/dielectric band offsets are independently determined
795 with this precision. The interface-localized dipole identified in Fig. 3e and any residual band bending
796 remain incorporated implicitly in the contacted-state alignment.

797 Under the positive high-field condition used for the Fowler–Nordheim analysis, the potential drop
798 across BiF₃ tilts the insulating barrier and enables tunnelling from the electrically connected residual
799 Bi₂Se₃ towards accessible BiF₃ conduction-band states (Extended Data Fig. 6f). The experimentally
800 extracted $\Phi_{\text{B,FN}} \approx 0.27 \text{ eV}$ is therefore assigned to an effective high-field Bi₂Se₃-to-BiF₃ injection barrier.
801 Its difference from the simple vacuum-referenced equilibrium separation is not interpreted as a direct
802 measurement of the interface dipole or band bending; rather, it reflects a field-modified tunnelling barrier
803 in a chemically and electronically reconstructed heterophase system. Because $\Phi_{\text{B,FN}} \propto (m_t^*)^{-1/3}$ and the
804 BiF₃-specific tunnelling mass was not independently measured, the extracted value remains a model-
805 dependent effective barrier rather than an exact equilibrium band offset.

806 Finally, the Fowler–Nordheim regime occurs well outside the gate-voltage window used for the MoS₂
807 transistor measurements and therefore does not represent the dominant transport process during normal
808 transistor operation. Linearized Schottky, Poole–Frenkel and Fowler–Nordheim representations are also
809 not unique microscopic fingerprints of individual leakage mechanisms [46]. We therefore use these analyses
810 as mutually consistent descriptions of field-dependent transport and as a means to estimate the effective
811 high-field injection barrier, rather than as independent determinations of the equilibrium interface band
812 structure.

Supplementary Note 6. Flat-Band Extraction and Semiconductor Screening

The flat-band response and semiconductor-side screening parameters were analysed using the frequency-dependent capacitance–voltage (C – V) characteristics of the Au/Ag/Pt/WSe₂/BiF₃/Bi₂Se₃/Au/Ti metal–insulator–semiconductor capacitor (MISCAP). Throughout this analysis, all capacitances are expressed per unit area.

The flat-band voltage, V_{FB} , was determined from the accumulation-to-depletion transition using the capacitance–voltage inflection-point method identified from the second derivative of the measured C – V characteristic [48]. The 10-kHz C – V characteristic was used because the corresponding transition remained within the experimentally accessible low-leakage bias window. At higher frequencies, the transition shifted toward gate voltages above the measurement range, where increasing dielectric leakage prevented reliable determination of the flat-band condition. The physically relevant flat-band voltage was identified from the principal accumulation-to-depletion inflection in the 10-kHz characteristic, corresponding to

$$\left. \frac{d^2 C_m}{dV_G^2} \right|_{V_G=V_{\text{FB}}} = 0, \quad (\text{S1})$$

with a corresponding change in the sign of $d^2 C_m/dV_G^2$. This analysis gives

$$V_{\text{FB}} \approx 0.58 \text{ V}, \quad (\text{S2})$$

as shown in Extended Data Fig. 7c. The measured 10-kHz capacitance at the flat-band condition is

$$C_{\text{FB}} = C_m(V_{\text{FB}}) = 2.34 \times 10^{-7} \text{ F cm}^{-2}. \quad (\text{S3})$$

We used an independent graphical consistency analysis to determine the effective capacitance of the TIHGS. At the independently determined V_{FB} , the two dimensionless functions

$$f_1 = \frac{1}{\sqrt{\frac{3k_B T}{q} \frac{1}{C_m} \frac{dC_m}{dV_G}}} - 1 \quad (\text{S4})$$

and

$$f_2 = \frac{C_m}{C_g - C_m} \quad (\text{S5})$$

were evaluated, where k_B is the Boltzmann constant, T is the absolute temperature, q is the elementary charge, and C_g is the effective capacitance of the complete TIHGS. Trial values of C_g were varied until $f_1 = f_2$ at the independently determined V_{FB} (Extended Data Fig. 7d). The resulting gate-stack response corresponds to

$$\varepsilon_{\text{eff, TIHGS}} \approx 16. \quad (\text{S6})$$

For the approximately 43-nm-thick converted BiF₃ layer in the MISCAP, this effective relative permittivity gives

$$C_g = \frac{\varepsilon_0 \varepsilon_{\text{eff, TIHGS}}}{t_{\text{BiF}_3}} = 3.29 \times 10^{-7} \text{ F cm}^{-2}, \quad (\text{S7})$$

where ε_0 is the vacuum permittivity. As in the TIHGS MIM analysis, $\varepsilon_{\text{eff, TIHGS}}$ is a BiF₃-thickness-normalized stack-level electrostatic quantity and should not be interpreted as the intrinsic dielectric constant of BiF₃. The value $\varepsilon_{\text{eff, TIHGS}} \approx 16$ is consistent with the finite boundary response independently observed in the TIHGS MIM capacitors and is therefore not interpreted as evidence for a capacitance or *EOT* enhancement. Its purpose here is to parameterize the effective TIHGS capacitance required to de-embed the semiconductor-side response.

The measured flat-band capacitance contains the TIHGS capacitance in series with the semiconductor-side response. The effective semiconductor-side flat-band capacitance was therefore obtained from

$$\frac{1}{C_{\text{FB}}} = \frac{1}{C_g} + \frac{1}{C_{\text{s, FB}}^*}, \quad (\text{S8})$$

giving

$$C_{\text{s,FB}}^* = \left(\frac{1}{C_{\text{FB}}} - \frac{1}{C_{\text{g}}} \right)^{-1} = 8.08 \times 10^{-7} \text{ F cm}^{-2}. \quad (\text{S9})$$

The corresponding effective screening length was estimated as

$$L_{\text{D,eff}} = \frac{\varepsilon_0 \varepsilon_{\perp, \text{WSe}_2}}{C_{\text{s,FB}}^*}, \quad (\text{S10})$$

where $\varepsilon_{\perp, \text{WSe}_2}$ is the out-of-plane relative permittivity of WSe₂. Using $T = 300$ K and a representative value $\varepsilon_{\perp, \text{WSe}_2} = 4.2$, as adopted in continuum electrostatic modelling of bulk-like WSe₂ flakes [38], gives

$$L_{\text{D,eff}} \approx 4.60 \text{ nm}. \quad (\text{S11})$$

The corresponding apparent volumetric majority-carrier concentration was estimated from

$$N_{\text{app}} = \frac{k_{\text{B}} T \varepsilon_0 \varepsilon_{\perp, \text{WSe}_2}}{q^2 L_{\text{D,eff}}^2}, \quad (\text{S12})$$

yielding

$$N_{\text{app}} \approx 2.83 \times 10^{17} \text{ cm}^{-3}. \quad (\text{S13})$$

Because the flat-band response is evaluated at 10 kHz, traps that remain electrically responsive at this frequency can contribute to $C_{\text{s,FB}}^*$. Accordingly, $L_{\text{D,eff}}$ and N_{app} are interpreted as effective low-frequency screening parameters rather than intrinsic bulk-semiconductor quantities. The measured WSe₂ thickness, $t_{\text{WSe}_2} = 37.37$ nm, nevertheless substantially exceeds $2L_{\text{D,eff}} \approx 9.20$ nm, indicating that electrostatic perturbations originating from the two opposing WSe₂ surfaces do not strongly overlap across the full semiconductor thickness.

Supplementary Note 7. Effective Interface-Trap Extraction and Limitations

The effective electrically active trap density, $D_{\text{it,eff}}$, was estimated from the frequency-dependent capacitance–voltage characteristics using the high–low-frequency Castagné–Vapaille approach [49, 50]. The method exploits the different frequency response of electrically active interface and near-interfacial traps and has been widely used to estimate trap densities from metal–insulator–semiconductor capacitance measurements, although the extracted values can depend on the assumed semiconductor response, measurement frequency window, and gate-stack electrostatics [50]. In this analysis, we denote the measured capacitances at 10 kHz and 1 MHz as C_{LF} and C_{HF} , respectively, so traps that respond differently over this frequency range contribute to the measured capacitance dispersion.

Throughout this analysis, all capacitances are expressed per unit area. The measured MISCAP capacitance contains the TIHGS electrostatic element in series with the semiconductor-side response. We use $C_g \equiv C_{\text{TIHGS}} = 3.29 \times 10^{-7} \text{ F cm}^{-2}$, obtained from the 10-kHz flat-band consistency analysis in Supplementary Note 6. Because an independently resolved frequency-dependent C_g is unavailable, this value is used for both the 10-kHz and 1-MHz de-embedding; any residual TIHGS dispersion is therefore included in the effective quantity $D_{\text{it,eff}}$. The effective semiconductor-side capacitances were calculated as

$$C_{\text{s,LF}}^* = \left(\frac{1}{C_{\text{LF}}} - \frac{1}{C_g} \right)^{-1}, \quad (\text{S14})$$

and

$$C_{\text{s,HF}}^* = \left(\frac{1}{C_{\text{HF}}} - \frac{1}{C_g} \right)^{-1}, \quad (\text{S15})$$

where C_{LF} and C_{HF} are the measured capacitances at 10 kHz and 1 MHz, respectively.

Within the conventional high–low-frequency approximation, the low-frequency semiconductor-side response includes semiconductor charge modulation and trap contributions that remain responsive at lower frequencies, whereas the corresponding trap response is reduced at higher frequencies. The frequency-dependent excess capacitance was therefore defined as

$$C_{\text{it,eff}} = C_{\text{s,LF}}^* - C_{\text{s,HF}}^*, \quad (\text{S16})$$

and the corresponding effective electrically active trap density as

$$D_{\text{it,eff}} = \frac{C_{\text{it,eff}}}{q} = \frac{1}{q} \left[\left(\frac{1}{C_{\text{LF}}} - \frac{1}{C_g} \right)^{-1} - \left(\frac{1}{C_{\text{HF}}} - \frac{1}{C_g} \right)^{-1} \right]. \quad (\text{S17})$$

The quantitative interpretation focused on the bias-dependent depletion-to-accumulation transition. The nearly gate-voltage-independent depletion floor was excluded because the semiconductor charge response is constrained by the finite WSe₂ thickness. Strong-accumulation values were likewise excluded because C_{LF} approaches C_g , making the semiconductor-side capacitance increasingly sensitive to small experimental uncertainties. Within the range (Extended Data Fig. 7e), the minimum extracted value is

$$D_{\text{it,eff}}^{\text{min}} \approx 7.48 \times 10^{11} \text{ cm}^{-2} \text{ eV}^{-1}. \quad (\text{S18})$$

The parallel-conductance response, G_p/ω , was also examined over the same gate-voltage and frequency ranges (Extended Data Fig. 7b). No well-resolved G_p/ω maximum suitable for conventional conductance-method extraction of trap density or characteristic time constant was observed within the accessible gate-bias range, while higher positive gate voltages were precluded by increasing dielectric leakage. The effective trap density was therefore evaluated using the high–low-frequency capacitance analysis described above.

The high–low-frequency method attributes the low–high capacitance difference to electrically active trap-related dispersion within the selected frequency window. In the WSe₂/TIHGS MISCAP, this response may include contributions from the WSe₂/BiF₃ interface, near-interfacial or border traps, residual TIHGS dispersion, distributed WSe₂ resistance, contact resistance, dielectric leakage, and measurement parasitics. Moreover, because 10 kHz is not a true quasi-static limit, substantially slower traps are not sampled. Accordingly, the extracted $D_{\text{it,eff}}$ should be interpreted as an effective electrically active trap response within the experimental frequency window rather than as a unique microscopic density of states exclusively at the WSe₂/BiF₃ interface, consistent with the known model and frequency dependence of high–low-frequency interface-trap extraction [50].

References

- [1] Pourfath, M. & Grasser, T. Device-scaling constraints imposed by the van der waals gap formed in two-dimensional materials. *Science* **392**, eaeb2271 (2026).
- [2] Cao, W. *et al.* The future transistors. *Nature* **620**, 501–515 (2023).
- [3] Lau, C. S. *et al.* Dielectrics for two-dimensional transition-metal dichalcogenide applications. *ACS Nano* **17**, 9870–9905 (2023).
- [4] Kim, Y. H. *et al.* Gate stack engineering of two-dimensional transistors. *Nature Electronics* **8**, 770–784 (2025).
- [5] Jung, M.-C., Kim, J. & Lee, G.-H. Advances in gate dielectrics for 2D electronics. *physica status solidi (RRL) – Rapid Research Letters* **20**, e202500133 (2026).
- [6] Shin, S. H. *et al.* 2D materials in logic technology: Power efficiency and scalability in 2DM-MBC CFET. *Nano Letters* **25**, 7224–7233 (2025).
- [7] Yoon, H. H. *et al.* Enabling the angstrom era: 2D material-based multi-bridge-channel complementary field effect transistors. *npj 2D Materials and Applications* **9**, 68 (2025).
- [8] Jung, H. *et al.* Advances and future challenges in monolithic 3d integrated logic, power, and optoelectronics technologies for tightly interconnected intelligent systems. *ACS nano* **20**, 6407–6445 (2026).
- [9] Osada, M. & Sasaki, T. Two-dimensional dielectric nanosheets: Novel nanoelectronics from nanocrystal building blocks. *Advanced Materials* **24**, 210–228 (2012).
- [10] Lee, G.-H. *et al.* Highly stable, dual-gated MoS₂ transistors encapsulated by hexagonal boron nitride with gate-controllable contact, resistance, and threshold voltage. *ACS Nano* **9**, 7019–7026 (2015).
- [11] Li, W. *et al.* Uniform and ultrathin high- κ gate dielectrics for two-dimensional electronic devices. *Nature Electronics* **2**, 563–571 (2019).
- [12] Li, T. *et al.* A native oxide high- κ gate dielectric for two-dimensional electronics. *Nature Electronics* **3**, 473–478 (2020).
- [13] Xu, Y. *et al.* Scalable integration of hybrid high- κ dielectric materials on two-dimensional semiconductors. *Nature Materials* **22**, 1078–1084 (2023).
- [14] Su, Y.-C. *et al.* High-transconductance molybdenum disulfide top-gate transistors using epitaxial interface engineering. *Nature Electronics* 1–10 (2026).
- [15] Chen, Y. *et al.* Experimental realization of a three-dimensional topological insulator, Bi₂Te₃. *science* **325**, 178–181 (2009).
- [16] Moore, J. E. The birth of topological insulators. *Nature* **464**, 194–198 (2010).
- [17] Pesin, D. & MacDonald, A. H. Spintronics and pseudospintronics in graphene and topological insulators. *Nature Materials* **11**, 409–416 (2012).
- [18] Yue, Z. *et al.* Topological surface state evolution in bi₂se₃ via surface etching. *Nano Letters* **24**, 12413–12419 (2024).
- [19] Sun, X. *et al.* Topological insulator metamaterial with giant circular photogalvanic effect. *Science Advances* **7**, eabe5748 (2021).
- [20] Breunig, O. & Ando, Y. Opportunities in topological insulator devices. *Nature Reviews Physics* **4**, 184–193 (2022).

- [21] Barton, A. T. *et al.* Impact of etch processes on the chemistry and surface states of the topological insulator Bi₂Se₃. *ACS Applied Materials & Interfaces* **11**, 32144–32150 (2019).
- [22] Hu, X. *et al.* Ultrahigh dielectric permittivity in ultrathin 2D β -Ga₂O₃ for advanced dielectric applications. *Nano Letters* **26**, 1805–1812 (2026).
- [23] Xu, F. *et al.* Few-layered MnAl₂S₄ dielectrics for high-performance van der Waals stacked transistors. *ACS applied materials & interfaces* **14**, 25920–25927 (2022).
- [24] Chang, W. H. *et al.* ALD-ZrO₂ gate dielectric with suppressed interfacial oxidation for high performance MoS₂ top gate MOSFETs. *Japanese Journal of Applied Physics* **60**, SBBH03 (2021).
- [25] Fu, Z. *et al.* Low-temperature controlled growth of 2D LaOCl with enhanced dielectric properties for advanced electronics. *Advanced Functional Materials* **35**, 2501136 (2025).
- [26] Wen, M., Xu, J., Liu, L., Lai, P.-T. & Tang, W.-M. Effects of annealing on electrical performance of multilayer MoS₂ transistors with atomic layer deposited HfO₂ gate dielectric. *Applied Physics Express* **9**, 095202 (2016).
- [27] Zou, J., Wang, L. & Chen, F. Improved performance of top-gated multilayer MoS₂ transistors with channel fully encapsulated by Al₂O₃ dielectric. *AIP Advances* **9**, 095061 (2019).
- [28] Shen, Y. *et al.* MoS₂ transistors with 4 nm hBN gate dielectric and 0.46 V threshold voltage. *ACS nano* **19**, 16903–16912 (2025).
- [29] Kresse, G. & Furthmüller, J. Efficient iterative schemes for ab initio total-energy calculations using a plane-wave basis set. *Physical review B* **54**, 11169 (1996).
- [30] Perdew, J. P., Burke, K. & Ernzerhof, M. Generalized gradient approximation made simple. *Physical review letters* **77**, 3865 (1996).
- [31] Blöchl, P. E. Projector augmented-wave method. *Physical review B* **50**, 17953 (1994).
- [32] Grimme, S., Ehrlich, S. & Goerigk, L. Effect of the damping function in dispersion corrected density functional theory. *Journal of computational chemistry* **32**, 1456–1465 (2011).
- [33] Gonze, X. & Lee, C. Dynamical matrices, born effective charges, dielectric permittivity tensors, and interatomic force constants from density-functional perturbation theory. *Physical Review B* **55**, 10355 (1997).
- [34] Kim, J. *et al.* Optimizing cross-domain transfer for universal machine learning interatomic potentials. *Nature Communications* **17**, 3432 (2026).
- [35] Ziegler, J. F., Ziegler, M. D. & Biersack, J. P. Srim—the stopping and range of ions in matter (2010). *Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms* **268**, 1818–1823 (2010).
- [36] Konobeyev, A. Y., Fischer, U., Korovin, Y. A. & Simakov, S. Evaluation of effective threshold displacement energies and other data required for the calculation of advanced atomic displacement cross-sections. *Nuclear Energy and Technology* **3**, 169–175 (2017).
- [37] Kong, D. *et al.* Rapid Surface Oxidation as a Source of Surface Degradation Factor for Bi₂Se₃. *ACS nano* **5**, 4698–4703 (2011).
- [38] Yu, X. & Sivula, K. Photogenerated charge harvesting and recombination in photocathodes of solvent-exfoliated wse₂. *Chemistry of Materials* **29**, 6863–6875 (2017).
- [39] Lieberman, M. A. & Lichtenberg, A. J. *Principles of Plasma Discharges and Materials Processing* (John Wiley & Sons, 1994).

- 980 [40] Kawamura, E., Vahedi, V., Lieberman, M. & Birdsall, C. Ion energy distributions in rf sheaths;
981 review, analysis and simulation. *Plasma Sources Science and Technology* **8**, R45–R64 (1999).
- 982 [41] Gahan, D. *et al.* Ion energy distribution measurements in rf and pulsed dc plasma discharges. *Plasma*
983 *Sources Science and Technology* **21**, 024004 (2012).
- 984 [42] Franklin, R. Electronegative plasmas—Why are they so different? *Plasma Sources Science and*
985 *Technology* **11**, A31–A37 (2002).
- 986 [43] Kono, A. Negative ions in processing plasmas and their effect on the plasma structure. *Applied*
987 *Surface Science* **192**, 115–134 (2002).
- 988 [44] Simmons, J. Richardson-schottky effect in solids. *Physical Review Letters* **15**, 967 (1965).
- 989 [45] Lenzlinger, M. & Snow, E. Fowler-nordheim tunneling into thermally grown sio₂. *Journal of Applied*
990 *physics* **40**, 278–283 (1969).
- 991 [46] Chiu, F.-C. A review on conduction mechanisms in dielectric films. *Advances in Materials Science*
992 *and Engineering* **2014**, 578168 (2014).
- 993 [47] Li, M. *et al.* *Selected topics on HfO₂ gate dielectrics for future ULSI CMOS devices. Proceedings. 7th*
994 *International Conference on Solid-State and Integrated Circuits Technology, 2004.*, Vol. 1, 366–371
995 (IEEE, 2004).
- 996 [48] Winter, R., Ahn, J., McIntyre, P. C. & Eizenberg, M. New method for determining flat-band voltage
997 in high mobility semiconductors. *Journal of Vacuum Science & Technology B* **31**, 030604 (2013).
- 998 [49] Castagne, R. & Vapaille, A. Description of the SiO₂–Si interface properties by means of very low
999 frequency MOS capacitance measurements. *Surface Science* **28**, 157–193 (1971).
- 1000 [50] Engel-Herbert, R., Hwang, Y. & Stemmer, S. Comparison of methods to quantify interface trap
1001 densities at dielectric/III-V semiconductor interfaces. *Journal of Applied Physics* **108**, 124101 (2010).