

Evaluation of the Efficacy of Transient Overvoltages Suppression Measures in Different Wind Farm Topologies

Tamer Eliyan (✉ tamer.alyan@feng.bu.edu.eg)

Benha University

Fady Wadie

Egyptian Russian University

Article

Keywords:

Posted Date: March 16th, 2023

DOI: <https://doi.org/10.21203/rs.3.rs-2654789/v1>

License:   This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Version of Record: A version of this preprint was published at Scientific Reports on August 22nd, 2023.
See the published version at <https://doi.org/10.1038/s41598-023-40768-4>.

Abstract

Various overvoltage mitigation schemes were used in literature in suppression of switching overvoltages in wind farms. However, the evaluation of how the effectiveness of these mitigation techniques would vary with the change of the wind farm topology is still un-explored territory. The main aim of this paper is to study the effectiveness of four mitigation schemes namely; R-L smart choke, R-C snubber circuit, surge capacitor and pre-insertion resistor (PIR) were studied in four different wind farm topologies; radial, single-sided ring, double-sided ring and star topologies. The topologies were based on a real wind farm located in Zaafrana, Egypt. The results showed that R-L choke to be the most effective scheme for all topologies followed by PIR, R-C snubber and surge capacitor schemes respectively. Their percentage of reduction of overvoltage ranged from 62–84% for R-L choke, 33–67% for PIR, 8–25% for R-C snubber circuits and 4–15% for surge capacitors. Also, it was shown that the change of the wind farm topology didn't affect the order of effectiveness of the mitigation schemes such that R-L remained the most effective and surge capacitor the least effective for all topologies.

Introduction

The dual sided problem due to the extended scale for energy market arising from increasing demand for electric power plus the diminishing supply for the reserve fossil fuel has imposed a fast track reliance on renewable energy sources. One of the main sources that has been utilized globally is wind energy leading to excessive investigation into the performance and protection wind farms. However, the structure of wind farms differs from conventional power stations in employing large number of power transformers, underground cables that extends for long distances and control algorithms that mandates frequent switching operations¹. Generally, wind farms constitute of several electrical and mechanical elements such as wind towers, turbines, underground cables, transformers, and protection devices. The connections between these elements could built in various topologies with four main widely known topologies namely; topologies are Radial topology, Single-Sided Ring (SSR) topology, Double-Sided Ring (DSR) topology, and Star topology².

The frequent switching induces a transient overvoltages whose destructive effect is amplified by the presence of power transformers and the MV cables which forms a resonant RLC circuit³. This destructive effect has led to insulation failures in wind farms⁴. The consequent losses due to theses failures have lead researchers to investigate the impact of transient overvoltages in wind farms^{5,6,7}. The highlights of the literature regarding the study of the impact of overvoltages in wind farms and the suppression measures employed to mitigate the overvoltages are summarized in Table 1.

Table 1
Highlights in literature investigating the impact of overvoltages in wind farms

Ref.	Year	Topic Studied in Publication	Suppression Measures Used
3	2021	Investigated switching overvoltages in different wind farm topologies.	Splitting the switching process into two stages
8	2022	Proposed a method for calculating arcing time and probability of reignitions	RC Snubber circuit and phase controlled switching
9, 11	2021, 2022	Proposed a method that evaluates the of suppression measures of overvoltages.	Surge arrester, RC snubber
10	2019	Analyzed the factors affecting switching transient overvoltage in an offshore wind farm	Not discussed
12	2023	Investigated the arising temporary overvoltage resulting from de-energization conditions, and the Ferro resonance in off shore wind farms.	Pre-Insertion Resistor (PIR)
13	2020	Analyzed statistically the overvoltage variations across the step-up transformer during the switching of circuit breaker.	Not discussed
14	2021	Investigated the overvoltage caused by switching off shunt reactors in a 35 kV substation,	Phase-controlled VCB, surge arresters, RC snubber, double-break circuit breaker and increasing the cable length.
15	2020	Investigated temporary overvoltage arising from switching of the circuit breaker connecting the wind turbine to the feeder	A damping resistor, shunt reactor and surge arrester
16	2019	Performed sensitivity analysis to define the factors affecting transient overvoltages in off-shore wind farms	Not discussed
17	2019	Analyzed the over-voltage formation mechanism in HVDC connected wind farm integration system	Proposed control strategies to suppress the over-voltage
18	2019	Studied the influence of different grinding parameter upon transient overvoltages	Not discussed
19, 20	2014, 2011	Switching over-voltages have been simulated in a wind farm to show the effect of changing the topology from radial to star topology in	Not discussed
21	2012	Studied the transient overvoltage in a radial system topology of a real practical wind farm.	Not discussed

The table shows the diverse topics studied in literature in regards of the transient analysis within wind farms. However, the impact of selecting the most suitable suppression technique with respect to the wind farm topology was not investigated before. Such topic is highly important as the degree of severity of the switching overvoltages (SOV) depends mainly on the wind farm topology^{3, 19, 20}. Therefore, the main problem that this paper aims to address is to investigate the most suitable suppression measure for each wind farm topology. Thus, the contributions of this paper will be:

1. Studying the transient SOV in different wind farm topologies
2. Investigating the most suitable suppression technique for each wind farm topology
3. Presenting conclusions for selection the optimal suppression measures based upon network topology.

The rest of this paper is organized as follows. Section 2 presents the system under study. Section 3 discusses the modeling methodologies used for different elements within the system. Simulation results are presented for each wind farm topology in section 4. The results of section 4 are discussed in section 5 showing the main features for selecting the suitable suppression method for each topology. Finally, conclusions are drawn in section 6.

System Under Study

The system selected to be under study is based on a real system located in Zaafrana, Egypt. The system is rated at 550 MW generated from 700 wind turbines that were assumed to have identical characteristic. For each turbine, a 1 MVA 690 V/22 kV-transformer is used. Cables of 200-m length are used to connect each two consecutive series turbines. The wind farm is connected to the grid through a 220/22 kV substation. The basic configuration will be kept unchanged but the connection between the turbines will be changed to include four different connection topologies namely; radial, single-sided ring, double-sided ring and star connection that are shown in Fig. 1. The lengths of feeders F1 is 8 km for all topologies. Feeder F2 is 10.4 km in single-sided ring topology and 6.5 km in double-sided ring topology. The length of feeder F3 is 1 km. the length of the cables between series turbines is 200 m for all topologies except of the star topology. In that particular topology, the length of the cable for each turbine will be 200 m for W1, 400 m for W2, 200 m W3, and 400 m for W4. The modifications done is based upon those presented in³. The modeling of each component of the system is discussed in the next section.

Modeling Of The System

Modeling of the circuit breaker

The circuit breakers used in this study are sF6 circuit breakers which could be modeled using several approaches with two most famous modeling blocks used known as Mayr's and Cassie models. Both models are discussed in the next subsections.

Mayr's model

The approach used in Mayr's model depends upon using dynamic analysis for the arc which defines the breakers ability to reach successful opening²². The main variable computed with the arc analysis is the conductance of the arc. During the opening process, the arc goes through four stages that represent the transition process of the breaker from certain state to another. These stages are closed breaker, arcing, arc extinguishing and open stages^{23, 24}. For the first stage of closed breaker and last stage of open breaker, the breaker is represented as a constant resistor of negligibly small value of $1 \mu\Omega$ and high value of $M\Omega$ respectively. For the remaining transition stages, a series connection of could be deduced as follows^{23, 25}.

- During the arcing stage, an imbalance arises in between the heating power from the arc (P_H) and the cooling power due to the dissipation of the energy from the arc (P_o). The difference between both energies is stored within the arc column $Q(t)$ as given in (1)

$$\frac{dQ(t)}{dt} = P_H - P_o$$

1

- The energy stored in arc $Q(t)$ is used to define the conductance $g_m(t)$ as given in (2) where τ is the arc time constant.

$$g_m(t) = K \frac{Q(t)}{P_o \tau}$$

2

- The given expression in (1) could re-defined in terms of the arc conductance as given in (3).

$$\frac{dQ(t)}{dg_m} \frac{dg_m}{dt} = P_H - P_o$$

3

- (2) could be substituted in (3) while considering the heating power equal to the amount of electrical power from the arc ($v \times i$), where v is the arc voltage and i is the arc current resulting in Eq. (4)

$$\frac{P_o \tau}{g_m} \frac{dg_m}{dt} = (v \times i) - P_o$$

4

- Finally, the conductance $g_m = v/i$ could be used in (4) to get (5).

$$\frac{dg_m}{dt} = \frac{1}{\tau} \left(\frac{i^2}{P_o} - g_m \right)$$

5

The modeling of the SF6 interrupter into ATP/EMTP environment is done by the MODELS component. That component allows the user to build a coded program integrates its programming with the simulated electrical system.

Transmission Lines, Feeders And Cables

The modeling of the transmission lines was done by the frequency-dependent model of the transmission lines with their parameters as given in Table 2. While for cables and feeders, the frequency-dependent cable model used with their lengths as given in previous section.

Table 2
Transmission line parameters

	Positive and negative sequence parameters	Zero sequence parameters
Resistance (Ω/km)	0.03	0.13
Reactance (Ω/km)	0.306	0.83
Susceptance (mS/km)	3.25	2.3

Power Transformers

The frequency-dependent transformer model is used to account for nonlinearities when studying the transformer's energization. For transient analysis, the effect of the stray capacitance is crucial to be considered. For such reason, the stray capacitances between each winding and the ground and the capacitance between the two windings of the main transformers were simulated using capacitive elements connected across transformer component upon ATP^{3, 26}.

Wind Turbine

The generation system within the wind turbine consists of different devices including the generator, gearbox, rectifier, three-phase inverter, and other components. Since the main focus of this research is the response from the switching circuit breaker, a 5 MW, 690 V synchronous generator model is used. The leakage reactance of the generator is 0.1 H²⁶.

Simulation Results

The investigation of the effectivity of the different mitigation techniques with respect to the topology of the wind farm was undergone using ATP/EMTP simulation platform. Different wind farm topologies provided earlier and shown in Fig. 1 were modeled as described in modeling section. For each topology, different mitigation techniques were applied individually one by one to assess their capability in reducing the switching overvoltages. The mitigation techniques studied includes four schemes that showed their effectiveness in literature namely; RC snubber circuit^{8, 9, 11}, Pre-Insertion Resistor (PIR)¹² and surge capacitor²⁷. The value of the parameters of each scheme (R and/or C) were set to reach maximum reduction in overvoltages based on defined ranges from literature²⁸. The selected values were 100 Ω for the PIR, R = 50 and C = 1 μ F for the RC snubber circuit and the capacitance of the surge capacitor was 1 μ F. A fourth technique termed as smart choke is used which was introduced by ABB, which consists of a set of parallel RL filters series connected at the upstream of a protected transformer²⁹. The R-L are integrated in their effect with the phase-to-ground capacitance of the transformer forming a low-pass filter that helps in reducing du/dt, limiting the overvoltage levels. The range of different parameters of the R-L is defined by ranges of 25–50 Ω for the damping resistor and 0.6 mH to 1.5 mH for inductor³⁰. For this work, the previous range of the values were tested and the values giving maximum reduction in switching overvoltage were selected which was found to be R of 50 Ω and inductance of 1.5 mH. The results for different mitigation techniques for each topology with R, L and C values set as defined earlier are present in the following subsections.

Simulation Results For Radial Topology

The circuit breaker switch S1 shown in Fig. 1 (a) for radial topology was suddenly opened at $t = 10$ ms. The results of the arising switching transient overvoltage is shown in Fig. 2(a). The PIR was connected in parallel with S1 and effectively reduced the overvoltages as shown in Fig. 2 (b). Sequentially, the PIR was removed R-C snubber circuit was connected in parallel with resulting transient overvoltages shown in Fig. 2(c). The same sequence was done for the smart choke and surge capacitor whose results are shown in Fig. 2 (d) and (e) respectively. The peak values recorded for each phase in each mitigation scheme are presented in Table 3. The results show that R-L smart choke was the most effective scheme in reducing switching overvoltages. Further discussion and analysis of the results are presented in next section.

Table 3
Peak value of switching overvoltage across circuit breaker S1 in radial topology

Mitigation Method	Switching Overvoltage (kV)		
	Phase A	Phase B	Phase C
Without mitigation	17.601	42.883	54.559
With PIR	6.631	20.628	26.120
With R-C	15.451	32.238	41.117
With choke coil R-L	5.394	15.867	20.236
With surge capacitor	16.675	36.756	45.332

Simulation Results For Single-sided Ring Topology

The same sequence of previous section will be undergone for this section such that circuit breaker switch S1 shown in Fig. 1 (b) for single sided topology was opened at $t = 10$ ms. The results of the arising switching transient overvoltage without mitigation, with PIR, RC-snubber, smart choke and surge capacitor shown in Fig. 3 (a) – (e) respectively. The peak values of the switching transients per phase are presented in Table 4. The results show that R-L smart choke was the most effective scheme in reducing switching overvoltages as in previous case.

Table 4
Peak value of switching overvoltage across circuit breaker S1 in single sided ring topology

Mitigation Method	TRV (kV)		
	Phase A	Phase B	Phase C
Without mitigation	16.021	34.272	39.452
With PIR	3237	12800	15700
With R-C	14.700	29.216	32.775
With choke coil R-L	2.440	9.238	11.616
With surge capacitor	15.260	31.500	34.835

Simulation Results For Double-sided Ring Topology

The results of the arising switching transient overvoltage across S1 in double sided ring topology of Fig. 1 (c) in case no mitigation used, with PIR, RC-snubber, smart choke and surge capacitor shown in

Fig. 4 (a) – (e) respectively. The peak values of the switching transients per phase are presented in Table 5.

Table 5
Peak value of switching overvoltage across circuit breaker
S1 in double-sided ring topology

Mitigation Method	TRV (kV)		
	Phase A	Phase B	Phase C
Without mitigation	17.550	42.330	53.850
With PIR	6.418	20.460	25.736
With R-C	15.073	32.751	40.295
With choke coil R-L	4.885	15.452	19.551
With surge capacitor	16.844	37.832	47.237

Simulation Results For Star Topology

The results for the switching transient overvoltage across S1 in star topology of Fig. 1 (d) in case no mitigation used, with PIR, RC-snubber, smart choke and surge capacitor shown in Fig. 5 (a) – (e) respectively. The peak values of the switching transients per phase are presented in Table 6.

Table 6
Peak value of switching overvoltage across circuit breaker
S1 in star topology

Mitigation Method	TRV (kV)		
	Phase A	Phase B	Phase C
Without mitigation	17.352	39.725	48.186
With PIR	5.583	18.952	23.394
With R-C	14.913	29.883	34.816
With choke coil R-L	4.309	14.921	18.439
With surge capacitor	16.135	34.132	40.941

Discussion And Effectivity Analysis

To evaluate the effectivity of each mitigation scheme used, the amount of reduction in switching overvoltages was computed. For radial topology, the transient overvoltage of phase A reached a peak value of 17.6 kV without any mitigation technique used. That value was reduced to 6.6 kV for the same phase when PIR was used. Hence, the percentage of the reduction in the switching overvoltage in this

case is 62.32% with respect to the unmitigated original overvoltage of 17.6 kV. The percentage of reduction for phase A for each mitigation scheme and in each topology are shown in Fig. 6 (a). Similarly, for phases B and C in Fig. 6 (b) and (c) respectively. The results show that smart choke R-L was the most effective scheme for all topologies. That effectiveness was monitored from the percentage of overvoltage that reached 84.7% in case of single sided ring topology and ranged from 62–73% in other topologies. The remaining schemes could be arranged in order of their effectivity as PIR, R-C snubber and surge capacitor respectively. The PIR, R-C and snubber had a percentage reduction ranging from 33–67%, 8–25% and 4–15% respectively. It could be noticed also, that the order of effectiveness of mitigation schemes remained the same for all topologies.

Figure 6 Percentage of reduction in switching overvoltages due to different mitigation schemes in each topology for (a) Phase A (b) Phase B (c) Phase C

The effect of increasing the feeder length was also investigated by increasing the length of feeder F1 from 8 km to 10 km and 12 km. The increase in feeder length did reduce the switching overvoltage but that reduction was very limited as shown in Fig. 7. The figure shows the level of switching overvoltage for each topology for feeder F1 of 8 km, 10 km and 12 km. it could be seen from the figure that the impact of the feeder length was very limited.

Figure 7 The transient overvoltage in each topology for different lengths of feeder F1 in

(a) Phase A (b) Phase B

Conclusions

The expanding utilization of wind farms and their various topologies has mandated the study of the effectiveness of the different overvoltage suppression schemes within each topology. In this study, four different topologies were selected, radial, single sided ring, double sided ring and star topologies. For each topology, the simulation tests showed a significant transient overvoltage showing during the switching of the circuit breaker. To suppress these overvoltages, four different mitigation schemes including pre-insertion resistor (PIR), RC-snubber circuit, R-L choke coil and surge capacitor.

To evaluate the effectiveness of each mitigation scheme, the percentage of reduction in transient overvoltage was computed in each case. The percentage of reduction of overvoltage showed the R-L choke coil to be the most effective mitigation scheme with percentage of reduction ranging from 62–84%. The PIR, R-C and snubber had a percentage reduction ranging from 33–67%, 8–25% and 4–15% respectively. It could be concluded that the effectiveness of the schemes could be arranged in order of their effectiveness as R-L choke coil, PIR, R-C snubber and surge capacitor respectively. Also, it was noticed that changing the wind farm topology did not affect the previous order of effectiveness of mitigation schemes.

Abbreviations

CB	: Circuit breaker	PIR	: Pre-insertion resistor
DSR	: Double sided-ring	Q	: Energy stored into the arc.
g_m	: Conductance of the arc	τ	: Arc time constant
P_H	: Heating power of arc	SSR	: Single sided-ring
P_o	: Cooling power		

Declarations

Data availability

The data that support the findings of this study are available from the corresponding author upon reasonable request.

Acknowledgements

The authors are grateful to the Faculty of Engineering at Shoubra, Benha University, Benha, Egypt, and the High Institute of Engineering, El-Shorouk Academy, Cairo, Egypt, for providing the necessary facilities to carry out the work.

Author contributions

T.A. and F.W. have participated in (a) conception, analysis and interpretation of the data and (b) drafting the article or revising it critically for important intellectual content.

Funding

No funding

Competing interests

The authors declare no competing interests.

References

1. A. Holdyk, J. Holbøll, E. Koldby, A. Jensen. Influence of offshore wind farms layout on electrical resonances. Proceedings of Cigre session 45, Paris, France. Paris: France; (2014).
2. J. F. Manwell, J. G. McGowan, A. L. Rogers AL. Wind energy explained, theory, design and application. John Wiley & Sons; (2010).
3. M. Elshahed, A. Ragab, M. Gilany, and M. Sayed. "Investigation of switching over-voltages with different wind farm topologies." *Ain Shams Engineering Journal* 12, no. 3: 2695-2707, (2021).
4. W. Sweet, "Danish wind turbines take unfortunate turn," *IEEE Spectrum*, vol. 41, no. 11, pp. 30–34, Nov. (2004).

5. T. Abdulahovic, T. Thiringer: Voltage Stress in a Transformer Winding During Very Fast Transients Caused by Breaker Closing Event, *IEEE Transactions On Power Delivery*, Vol. 29, No. 4, pp. 1946-1954, (2014).
6. L. Liljestrand, A. Sannino, H. Breder, and S. Thorburn, "Transients in collection grids of large offshore wind parks," *Wind Energy*, vol. 11, pp. 45-61, (2008)
7. T. Abdulahovic, "Analysis of High Frequency Electrical Transients in Offshore Wind Parks," in Dep. Energy and Environment. vol. MSc: Chalmers University of Technology, (2009).
8. Sun, Qiuqin, Zhi Zheng, Lei Huang, Feng Wang, Lipeng Zhong, and She Chen. "Investigation on Reignition Probability of Switching Overvoltage Caused by Vacuum Circuit Breaker in Offshore Wind Farms." *IEEE Transactions on Power Delivery* 37, no. 5: 4438-4447, (2022).
9. Y. Xin, B. Zhao, Q. Liang, J. Zhou, T. Qian, Z. Yu, and W. Tang. "Development of improved suppression measures against reignition overvoltages caused by vacuum circuit breakers in offshore wind farms." *IEEE Transactions on Power Delivery* 37, no. 1: 517-527, (2021).
10. Y. Xin, Y. H. Yang, B. N. Zhao, L. Xu, Z. Y. Yu, and W. H. Tang. "Configuration of suppression schemes against high-frequency transient reignition overvoltages caused by shunt reactor switching-off in offshore wind farms." *International Journal of Electrical Power & Energy Systems* 141: 108170, (2022).
11. Jiujiang Zhou, Yanli Xin, Wenhui Tang, Gang Liu, and Qinghua Wu. "Impact factor identification for switching overvoltage in an offshore wind farm by analyzing multiple ignition transients." *IEEE Access* 7: 64651-64662, (2019).
12. Abdelrahman Said, Mahmoud Ezzat, Mousa A. Abd-Allah, Mostafa M. Fouda, and Mohamed A. Abouelatta. "Optimization-Based on Mitigation Techniques of the Temporary Overvoltage in Large Offshore Wind Farm." *IEEE Access*, (2023).
13. Sajjad Ghasemi, Mehdi Allahbakhshi, Behzad Behdani, Mohsen Tajdinian, and Marjan Popov. "Probabilistic analysis of switching transients due to vacuum circuit breaker operation on wind turbine step-up transformers." *Electric Power Systems Research* 182: 106204, (2020).
14. Yun Geng, Jinlong Dong, Xingguo Chen, Luyang Zhang, Jing Yan, Yingsan Geng, Jing Peng, and Ke Wang. "Three-phase modeling of 40.5-kV vacuum circuit breaker switching off shunt reactors and overvoltage suppression measure analysis." *Electric Power Systems Research* 194: 107058, (2021).
15. Akinrinde, Ajibola, Andrew Swanson, and Innocent Davidson. "Investigation and mitigation of temporary overvoltage caused by de-energization on an offshore wind farm." *Energies* 13, no. 17: 4439, (2020).
16. Xin, Y. L., W. H. Tang, J. J. Zhou, Y. H. Yang, and G. Liu. "Sensitivity analysis of reignition overvoltage for vacuum circuit breaker in offshore wind farm using experiment-based modeling." *Electric Power Systems Research* 172: 86-95, (2019).
17. Yingbiao Li, Jianbo Guo, Xi Zhang, Shanshan Wang, Shicong Ma, Bing Zhao, Guanglu Wu, and Tiezhu Wang. "Over-voltage suppression methods for the MMC-VSC-HVDC wind farm integration system." *IEEE Transactions on Circuits and Systems II: Express Briefs* 67, no. 2 355-359, (2019).

18. Kafshgari, Nasim Akbari, Nabiollah Ramezani, and Hassan Nouri. "Effects of high frequency modeling & grounding system parameters on transient recovery voltage across vacuum circuit breakers for capacitor switching in wind power plants." *International Journal of Electrical Power & Energy Systems* 104: 159-168, (2019).
19. Zhang T, Sun L, Zhang Y. Study on switching overvoltage in off-shore wind farms. *IEEE Trans Appl Supercond* 24:1–5, (2014).
20. Villar F, Reza M, Srivastava K, Da Silva L. High frequency transients propagation and the multiple reflections effect in collection grids for offshore wind parks. IEEE power and energy society general meeting, Detroit, MI, (2011).
21. Chennamadhavuni A, Munji KK, Bhimasingu R. Investigation of transient and temporary overvoltages in a wind farm. Auckland: Power System Technology; (2012).
22. Osama E. Gouda, Mohamed I. Awaad, and Zinab E. Afifi. "Impact of Superconducting Current Limiter on the Gaseous HVDC Circuit Breakers Characteristics." *Electric Power Systems Research* 199. 107442, (2021).
23. Ebrahim A. Badran, M. A. Abd-Allah, Abdelsalam H. Hamza, and Tamer Elyan. "A Proposed Transient Recovery Voltage Mitigation Technique for Generator-Circuit-Breaker Fed Faults." *Journal of Electrical Systems* 9, no. 1: 66-72, (2013).
24. Grega Bizak, Peter Zunko and Dusan Povh, Combined Model of SF6 Circuit Breaker for Use in Digital Simulation Programs, *IEEE Transactions on Power Delivery*, 19(1), 174-180, (2004).
25. Osama E. Gouda, Ghada Amer, Mohamed Awaad, and Manar Ahmed. "Cascaded HVDC gaseous circuit breaker performance using black box arc model." *Electrical Engineering* 103, no. 2, 1199-1215, (2021).
26. Mohamed A Abouelatta, Mahmoud Ezzat, M. A. Abd-Allah, and Abdelrahman Said. "Analysis and Mitigation of The Lightning Overvoltage in Capacitively Coupling Grid Connected Offshore Wind Turbine." *International Journal on Electrical Engineering and Informatics* 14, no. 2: 443-464, (2022).
27. Yanli Xin, Bo Liu, Wenhui Tang, and Qinghua Wu. "Modeling and mitigation for high frequency switching transients due to energization in offshore wind farms." *Energies* 9, no. 12: 1044, (2016).
28. Mohamed A. Ebrahim, Tamer Elyan, Fady Wadie, and Mousa A. Abd-Allah. "Optimal design of RC snubber circuit for mitigating transient overvoltage on VCB via hybrid FFT/Wavelet Genetic approach." *Electric Power Systems Research* 143: 451-461, (2017).
29. Smugala, D.; Piasecki, W.; Ostrogorska, M.; Florkowski, M.; Fulczyk, M.; Granhaug, O. Wind turbine transformers protection method against high-frequency transients. *IEEE Trans. Power Deliv*, 30, 853–860, (2015).
30. Smugała, D.; Piasecki, W.; Ostrogórska, M.; Florkowski, M.; Fulczyk, M.; Granhaug, O. New approach to protecting transformers against high frequency transients–wind turbine case study. *Prz. Elektrotech.* 89, 186–190, (2013).

Figures

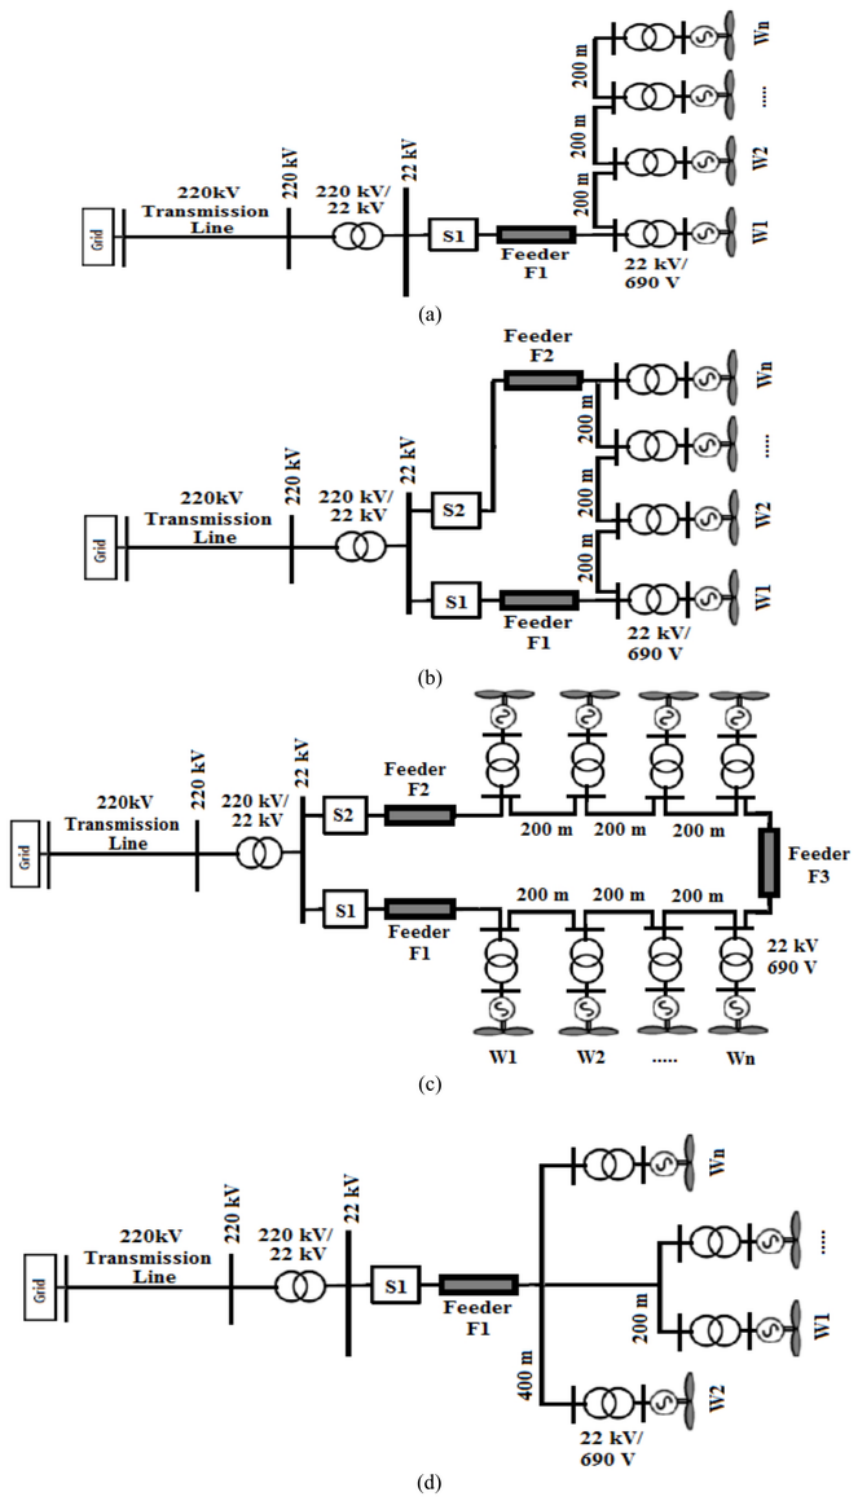


Figure 1

Topologies of wind farm (a) Radial (b) Single sided ring (c) Double sided ring (d) Star

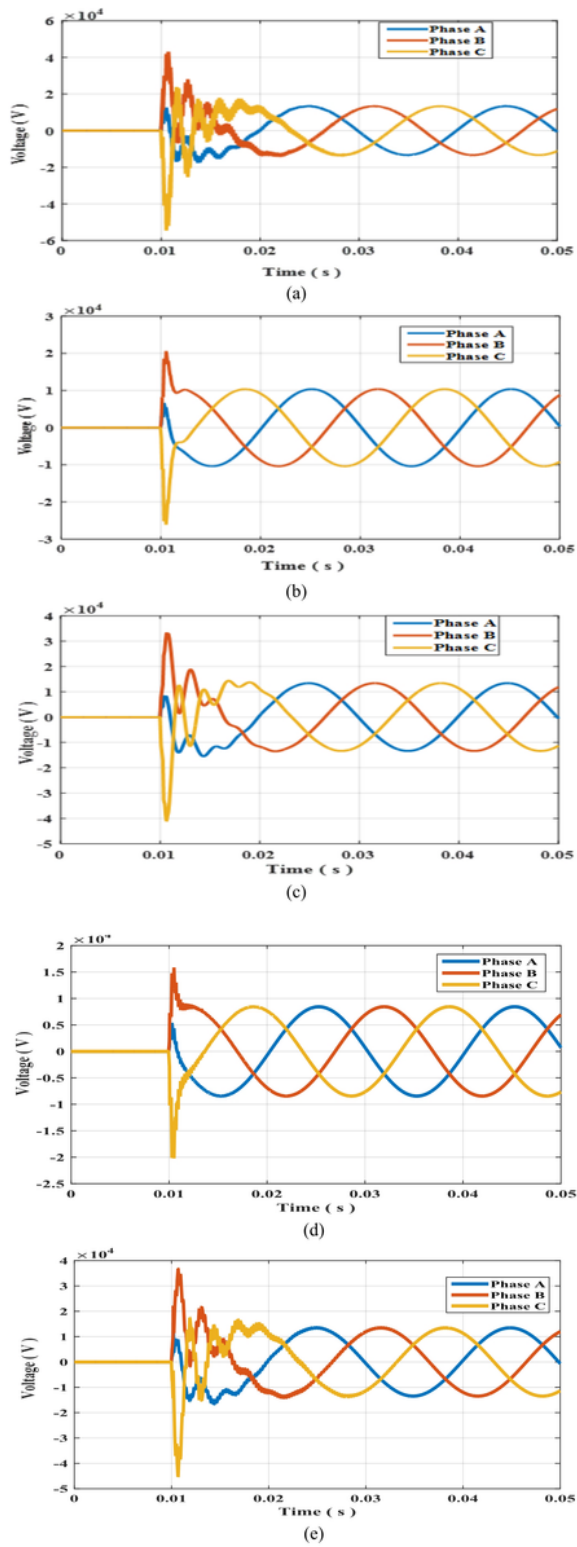


Figure 2

Switching overvoltage across circuit breaker S1 in radial topology (a) Without Mitigation (b) With PIR (c) with R-C snubber circuit (d) with R-L smart choke (e) with surge capacitor

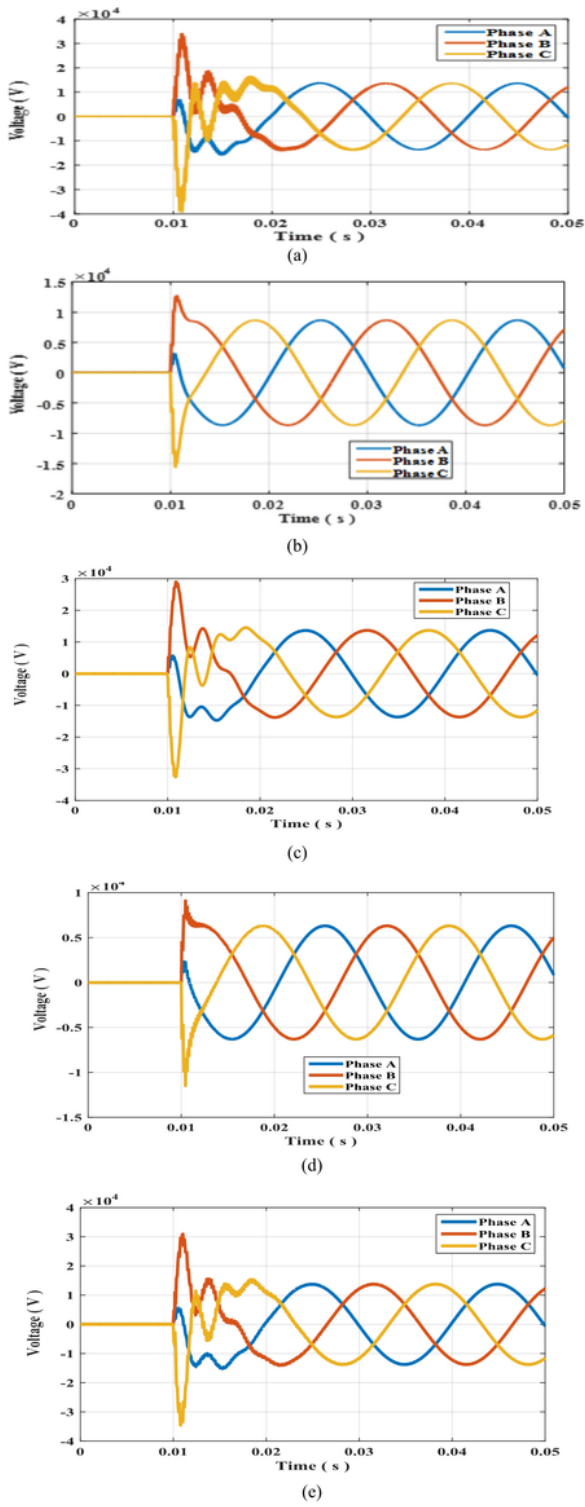


Figure 3

Switching overvoltage across circuit breaker S1 in single-sided ring topology (a) Without Mitigation (b) With PIR (c) with R-C snubber circuit (d) with R-L smart choke (e) with surge capacitor

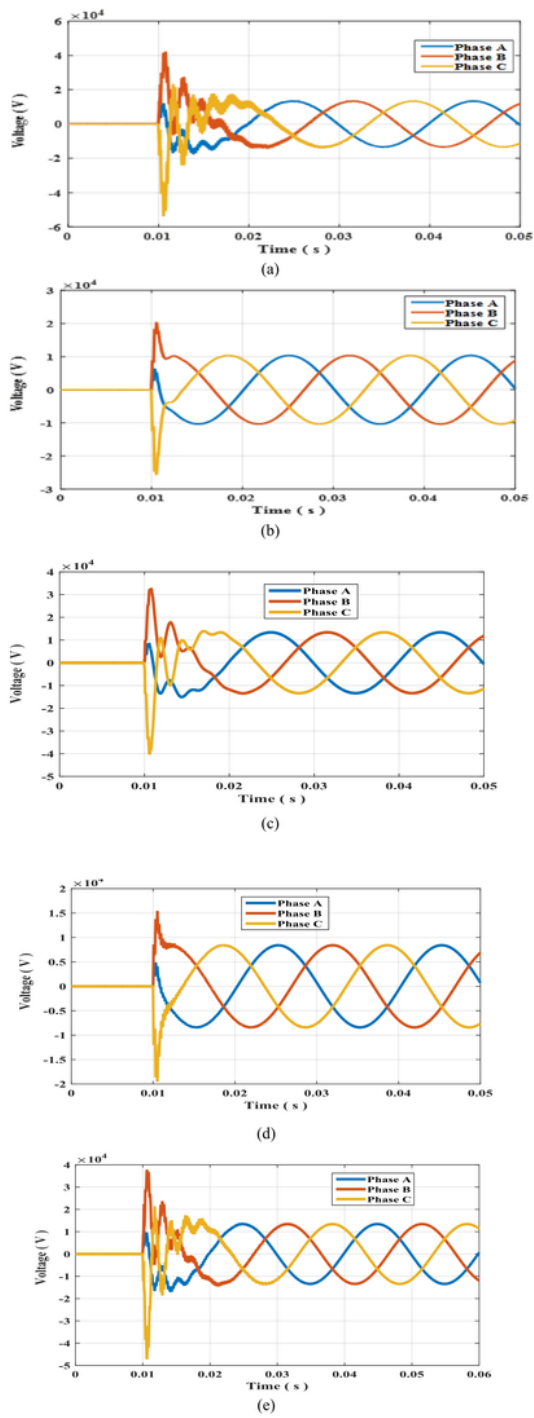


Figure 4

Switching overvoltage across circuit breaker S1 in double-sided ring topology (a) Without Mitigation (b) With PIR (c) with R-C snubber circuit (d) with R-L smart choke (e) with surge capacitor



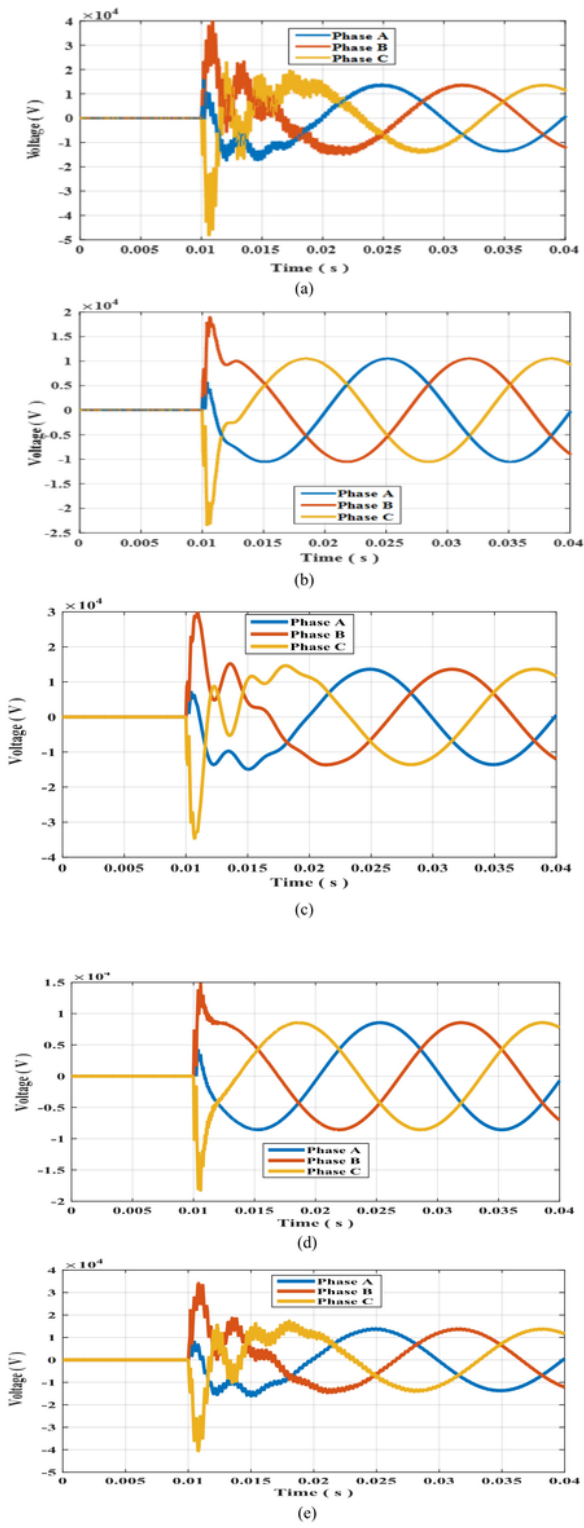


Figure 5


Switching overvoltage across circuit breaker S1 in star topology (a) Without Mitigation (b) With PIR (c) with R-C snubber circuit (d) with R-L smart choke (e) with surge capacitor

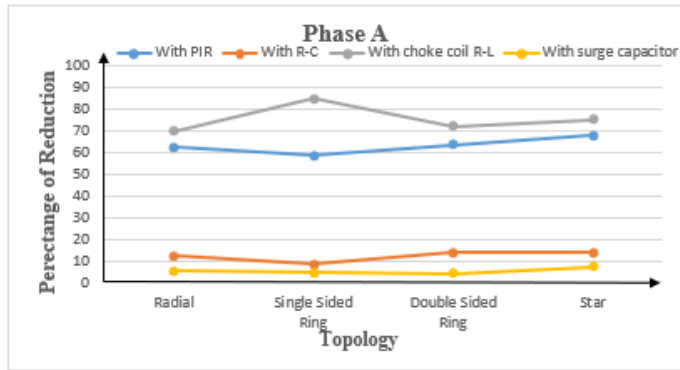

(a)

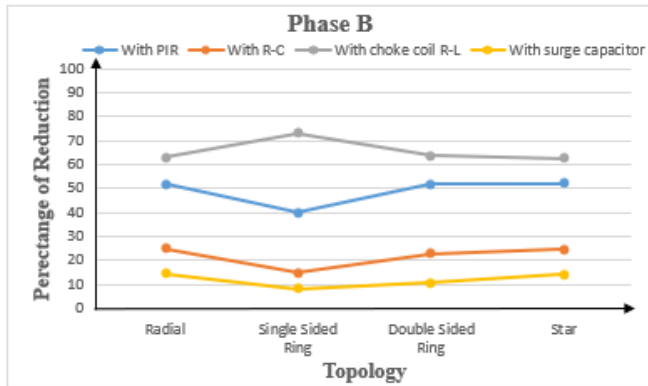


(b)

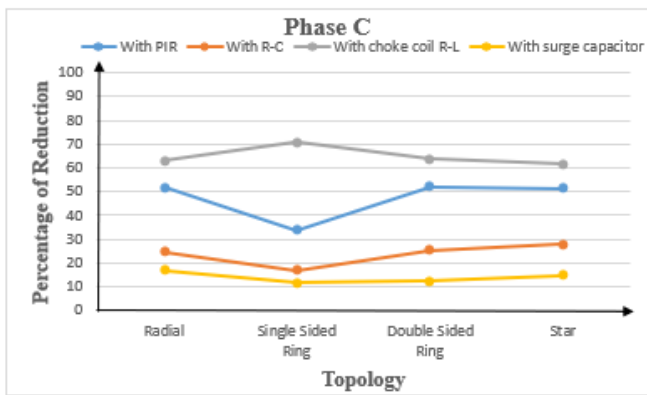


(c)

Figure 6

Percentage of reduction in switching overvoltages due to different mitigation schemes in each topology for (a) Phase A (b) Phase B (c) Phase C

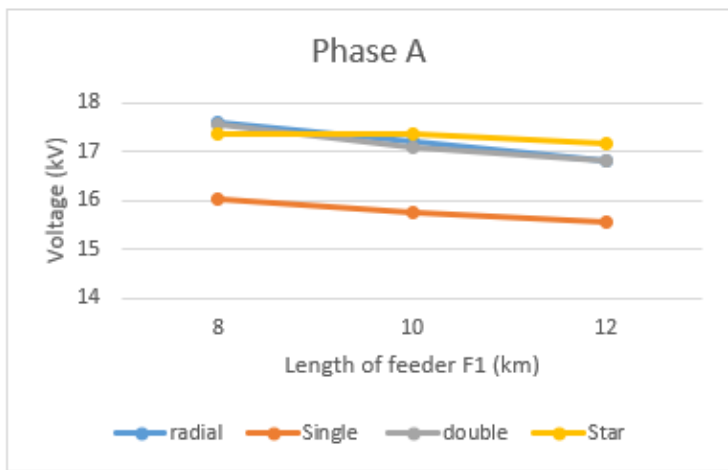

(a)

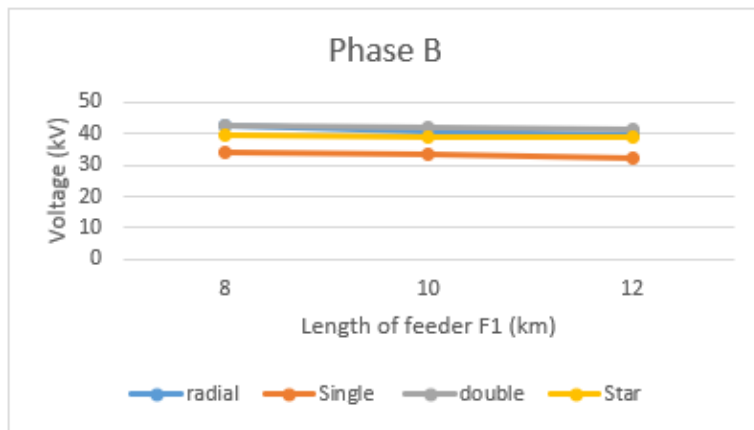

(b)

Figure 7

The transient overvoltage in each topology for different lengths of feeder F1 in

(a) Phase A (b) Phase B