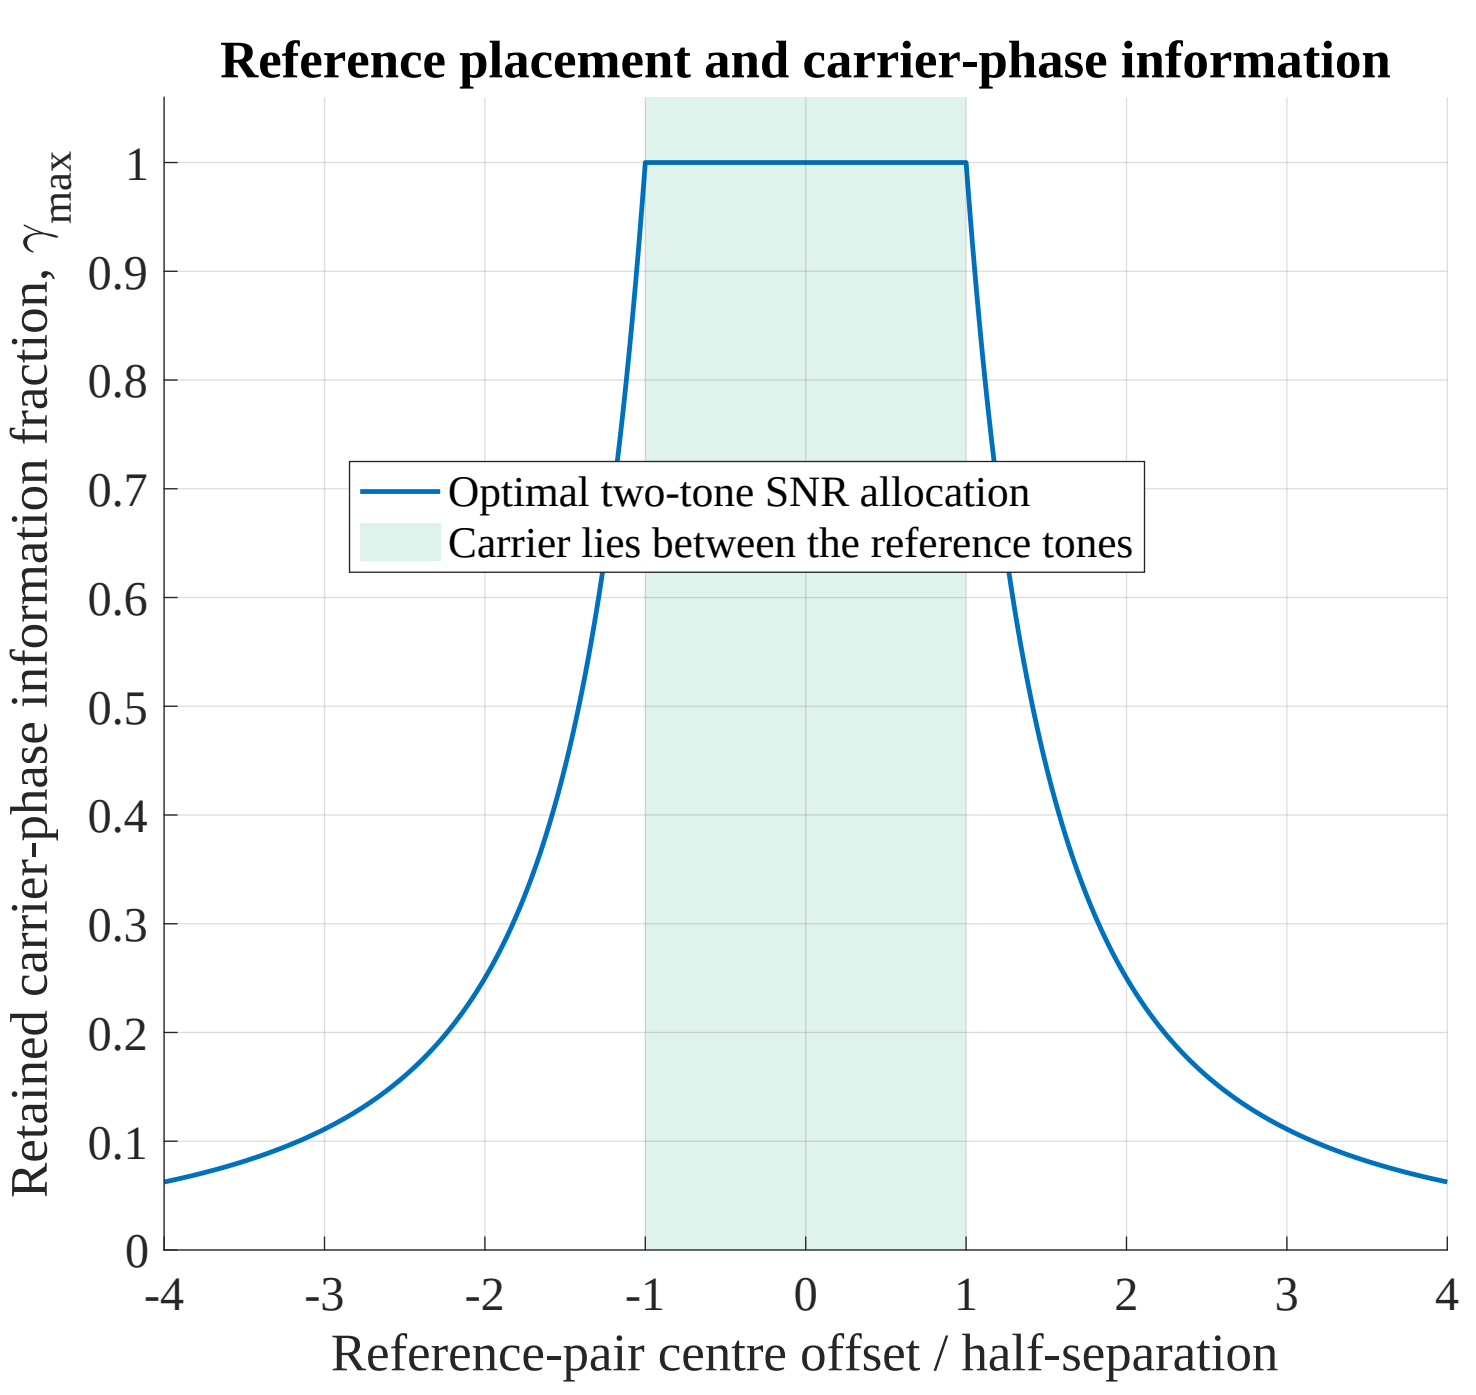

Reference placement and carrier-phase information
Retained carrier-phase information fraction, γ_{max}
Reference-pair centre offset / half-separation
Optimal two-tone SNR allocation
Carrier lies between the reference tones
0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1
-4
-3
-2
-1
0
1
2
3
4