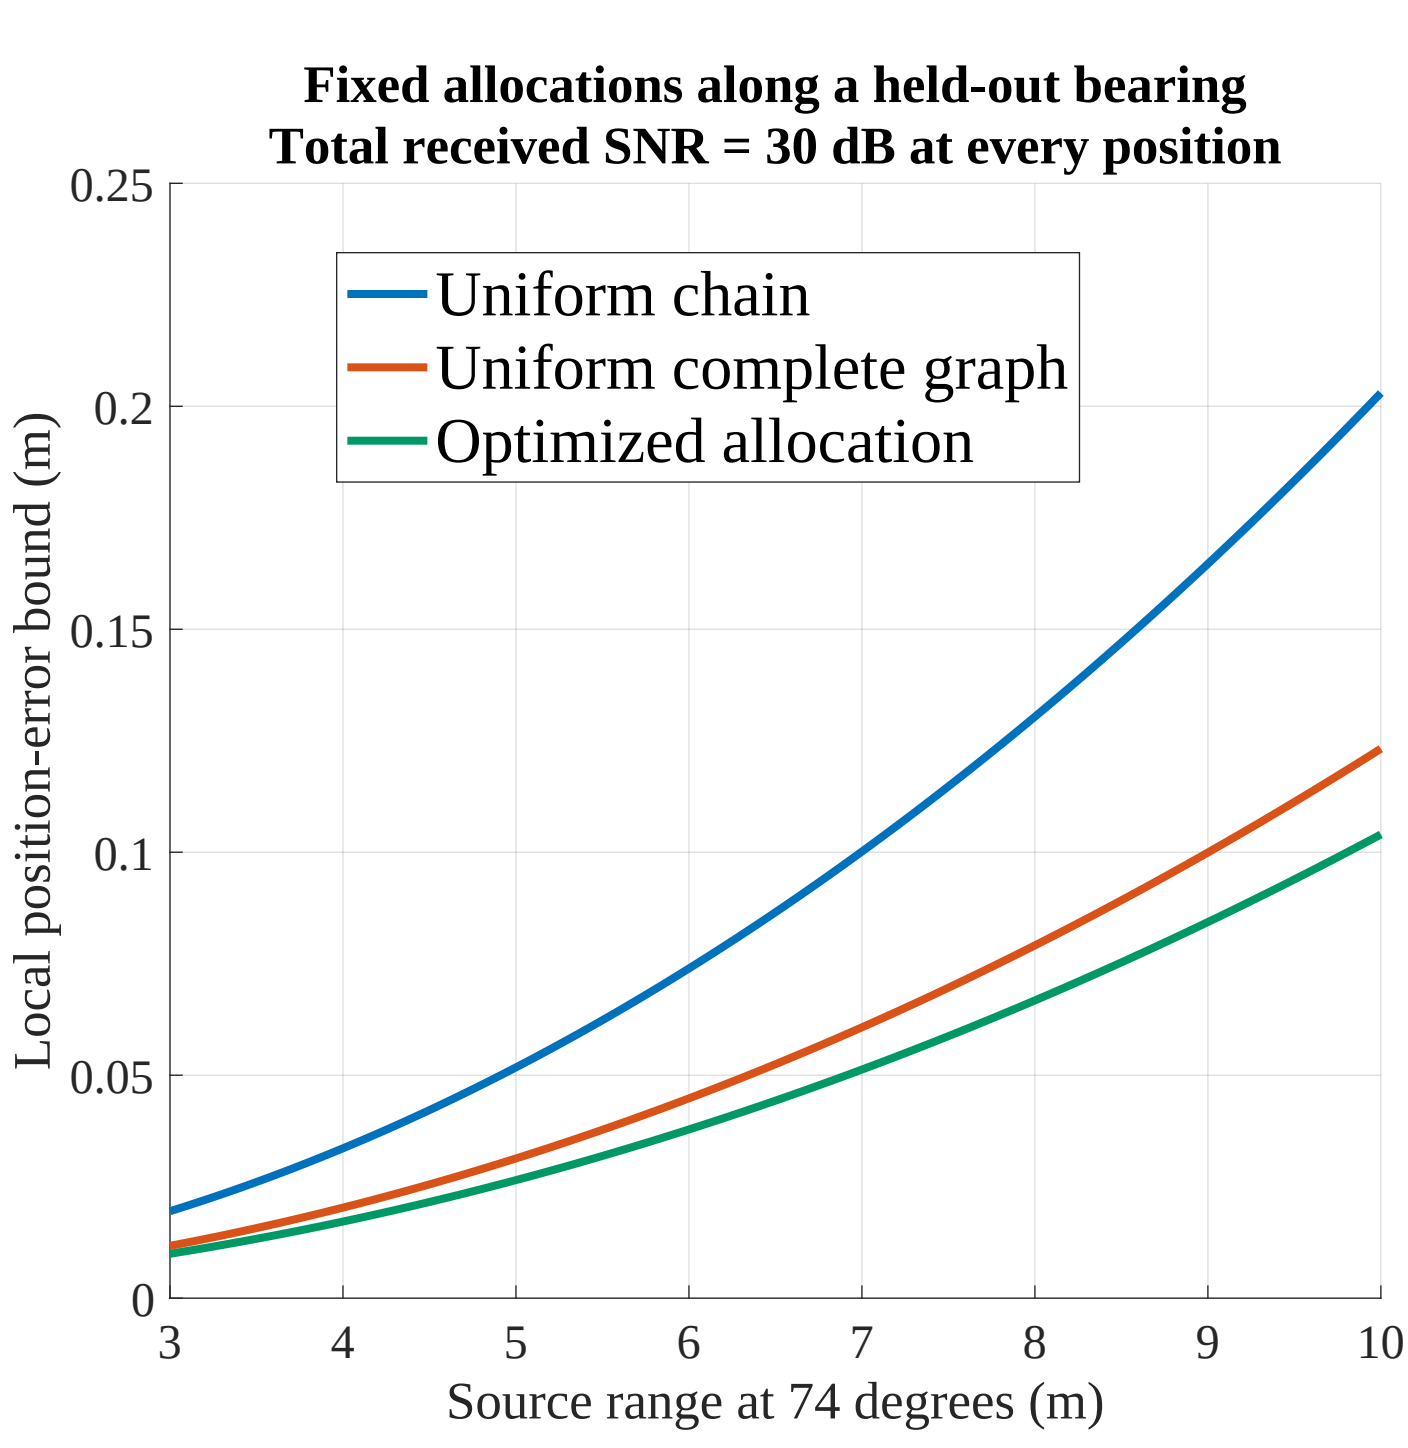

Fixed allocations along a held-out bearing
Total received SNR = 30 dB at every position
Uniform chain
Uniform complete graph
Optimized allocation
Local position-error bound (m)
0
0.05
0.1
0.15
0.2
0.25
3
4
5
6
7
8
9
10
Source range at 74 degrees (m)