

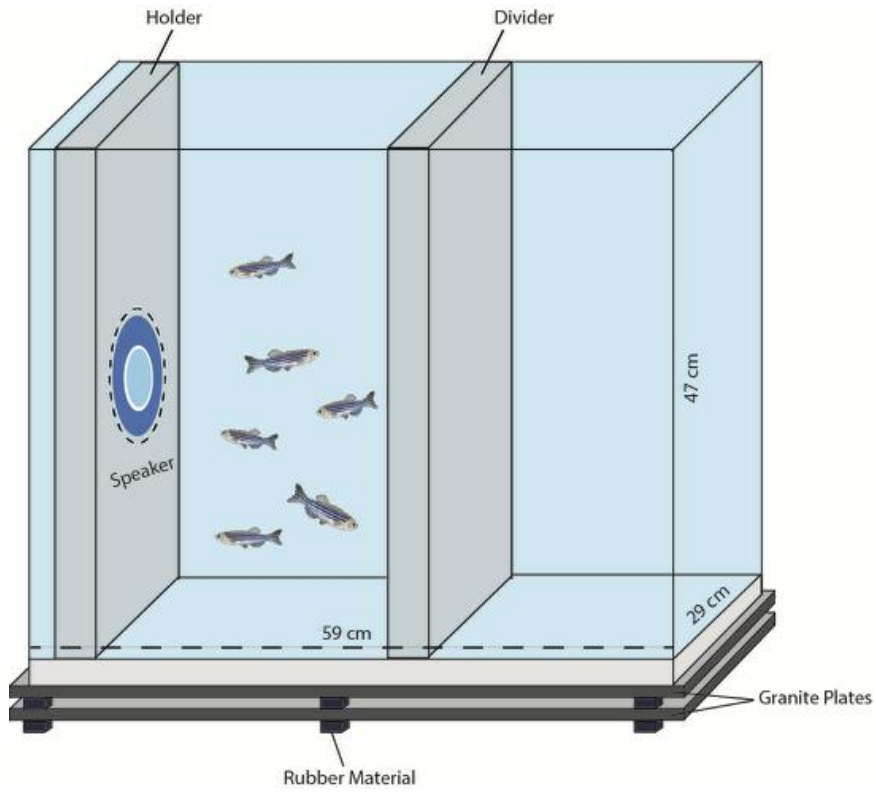


Fig. 1 Supplementary. Experimental playback setup. Tanks used for noise exposure were mounted on top of a Styrofoam plate and two granite plates (1.5 cm thickness). Granite plates were spaced by rubber materials. The underwater speaker (UW30, Electro-Voice, MN, USA) was mounted vertically using a custom built Styrofoam holder. Another Styrofoam divider was placed opposite to the speaker.