

SUPPLEMENTARY INFORMATION

Exploring the impact of temperature and oxygen partial pressure
on the spent nuclear fuel oxidation during its dry management

AUTHORS NAMES AND AFFILIATIONS

A. Milena-Pérez¹, L.J. Bonales^{1}, N. Rodríguez-Villagra¹, H. Galán¹*

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas (CIEMAT).
Avda. Complutense 40, 28040, Madrid (Spain).

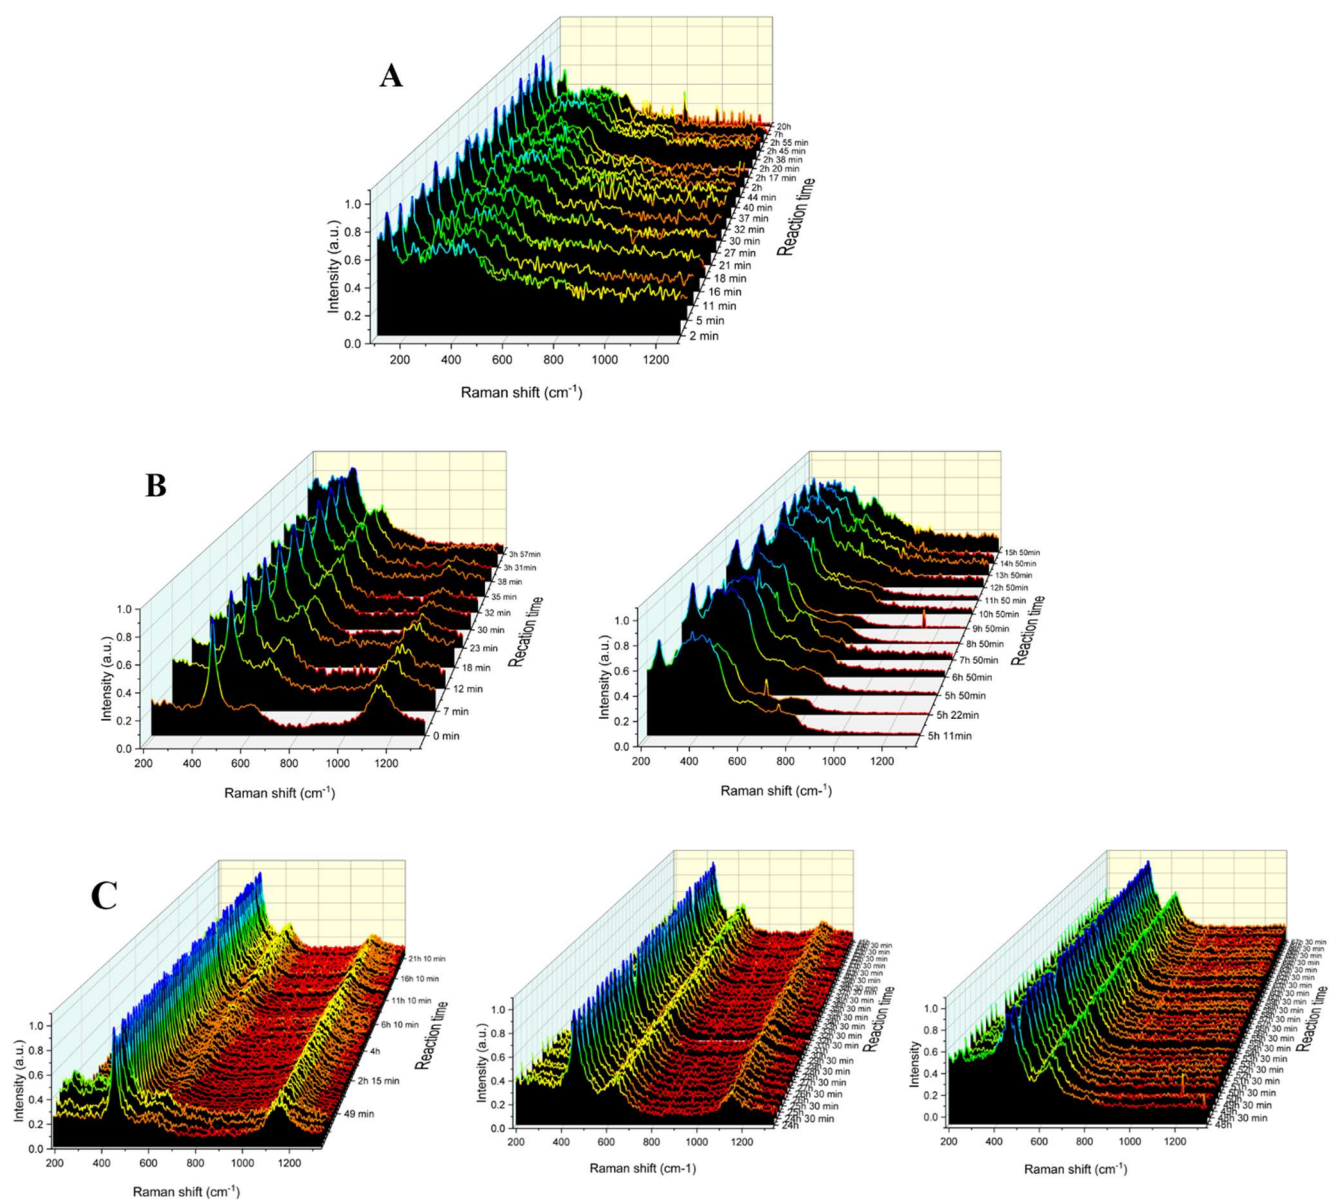


Figure S1. Raman spectra obtained at 21% of O₂ at 400°C (A), 300 °C (B) and 200 °C (C).

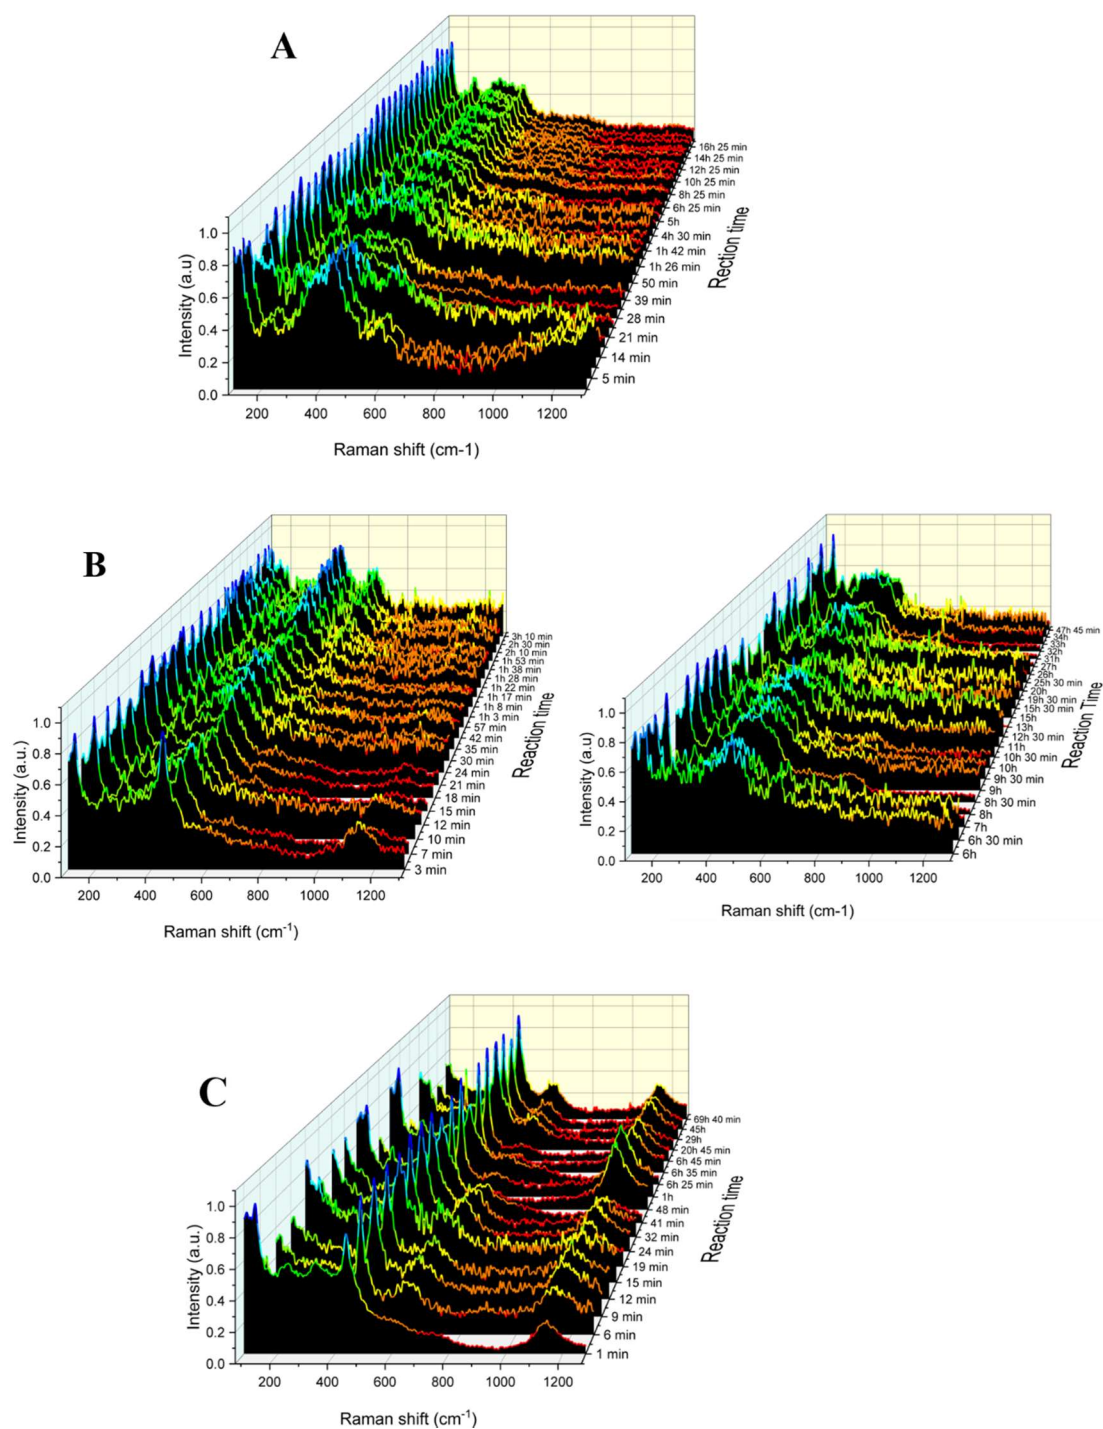


Figure S2. Raman spectra obtained at 10% of O₂ at 400°C (A), 300°C (B) and 200°C (C).

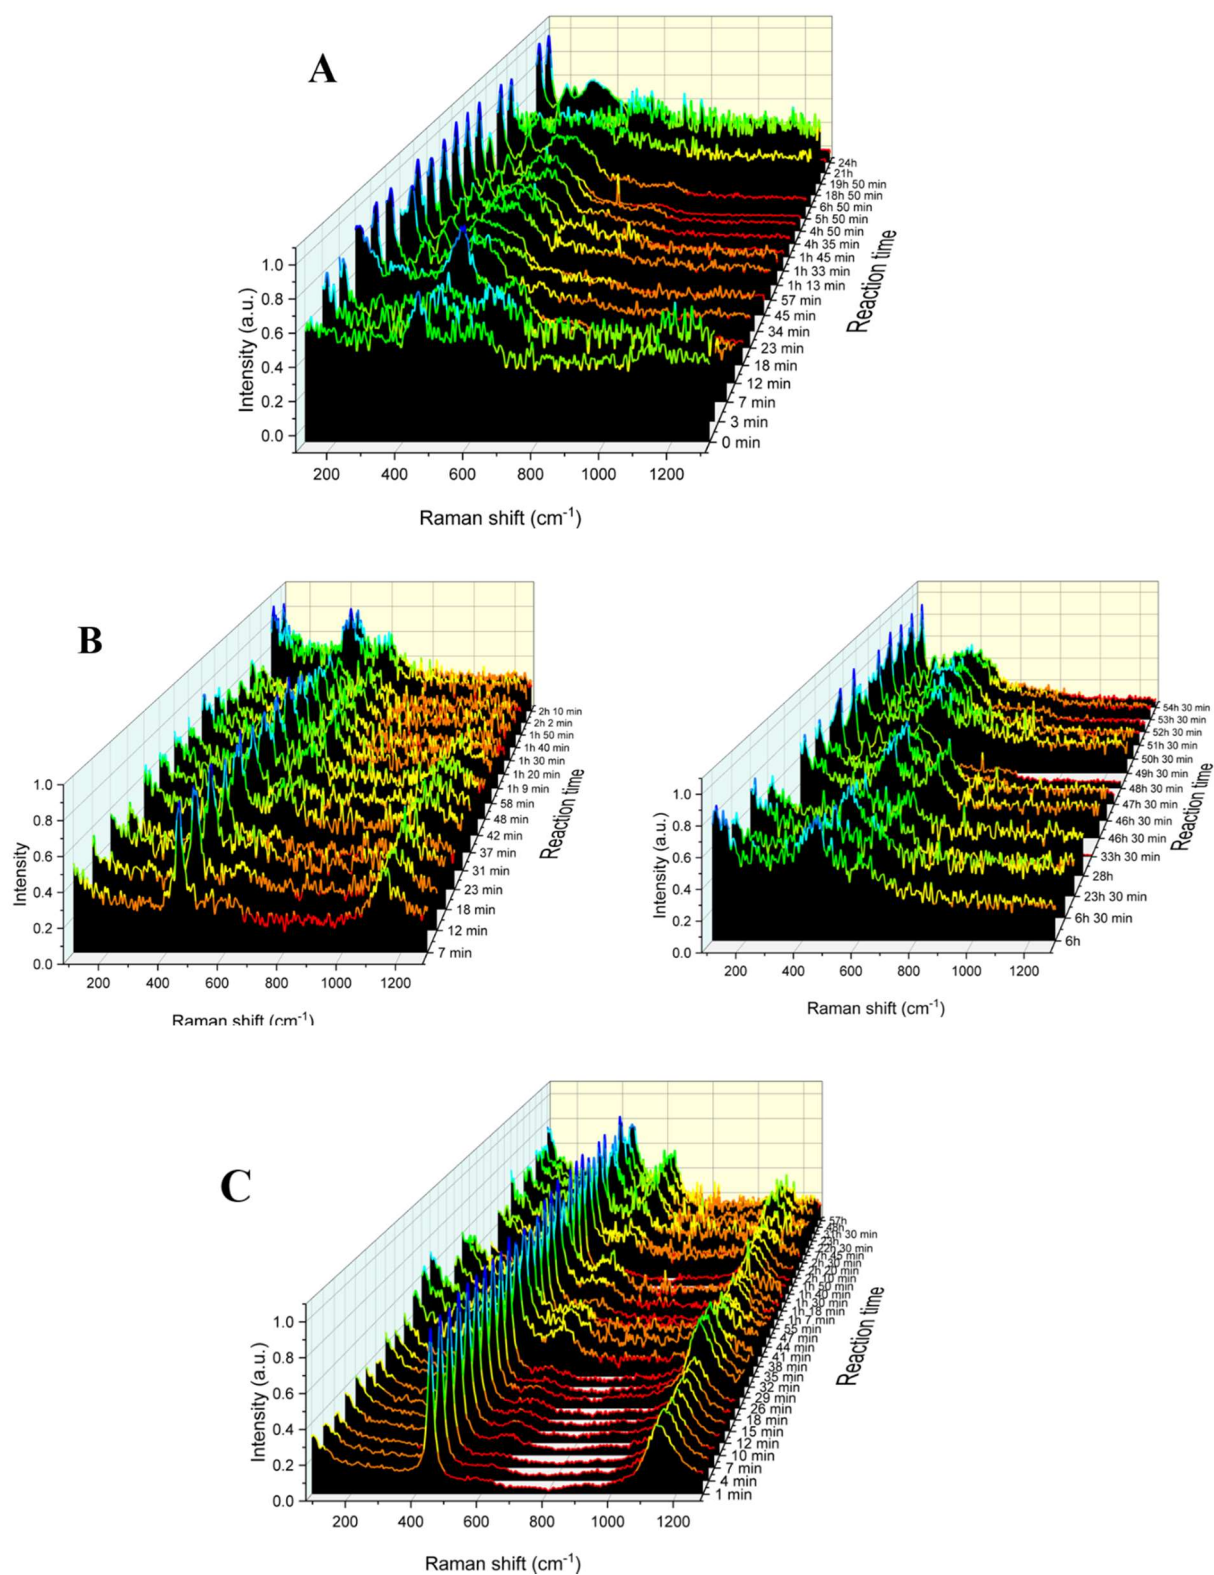


Figure S3. Raman spectra obtained at 1% of O_2 at 400°C (A), 300°C (B) and 200°C (C).

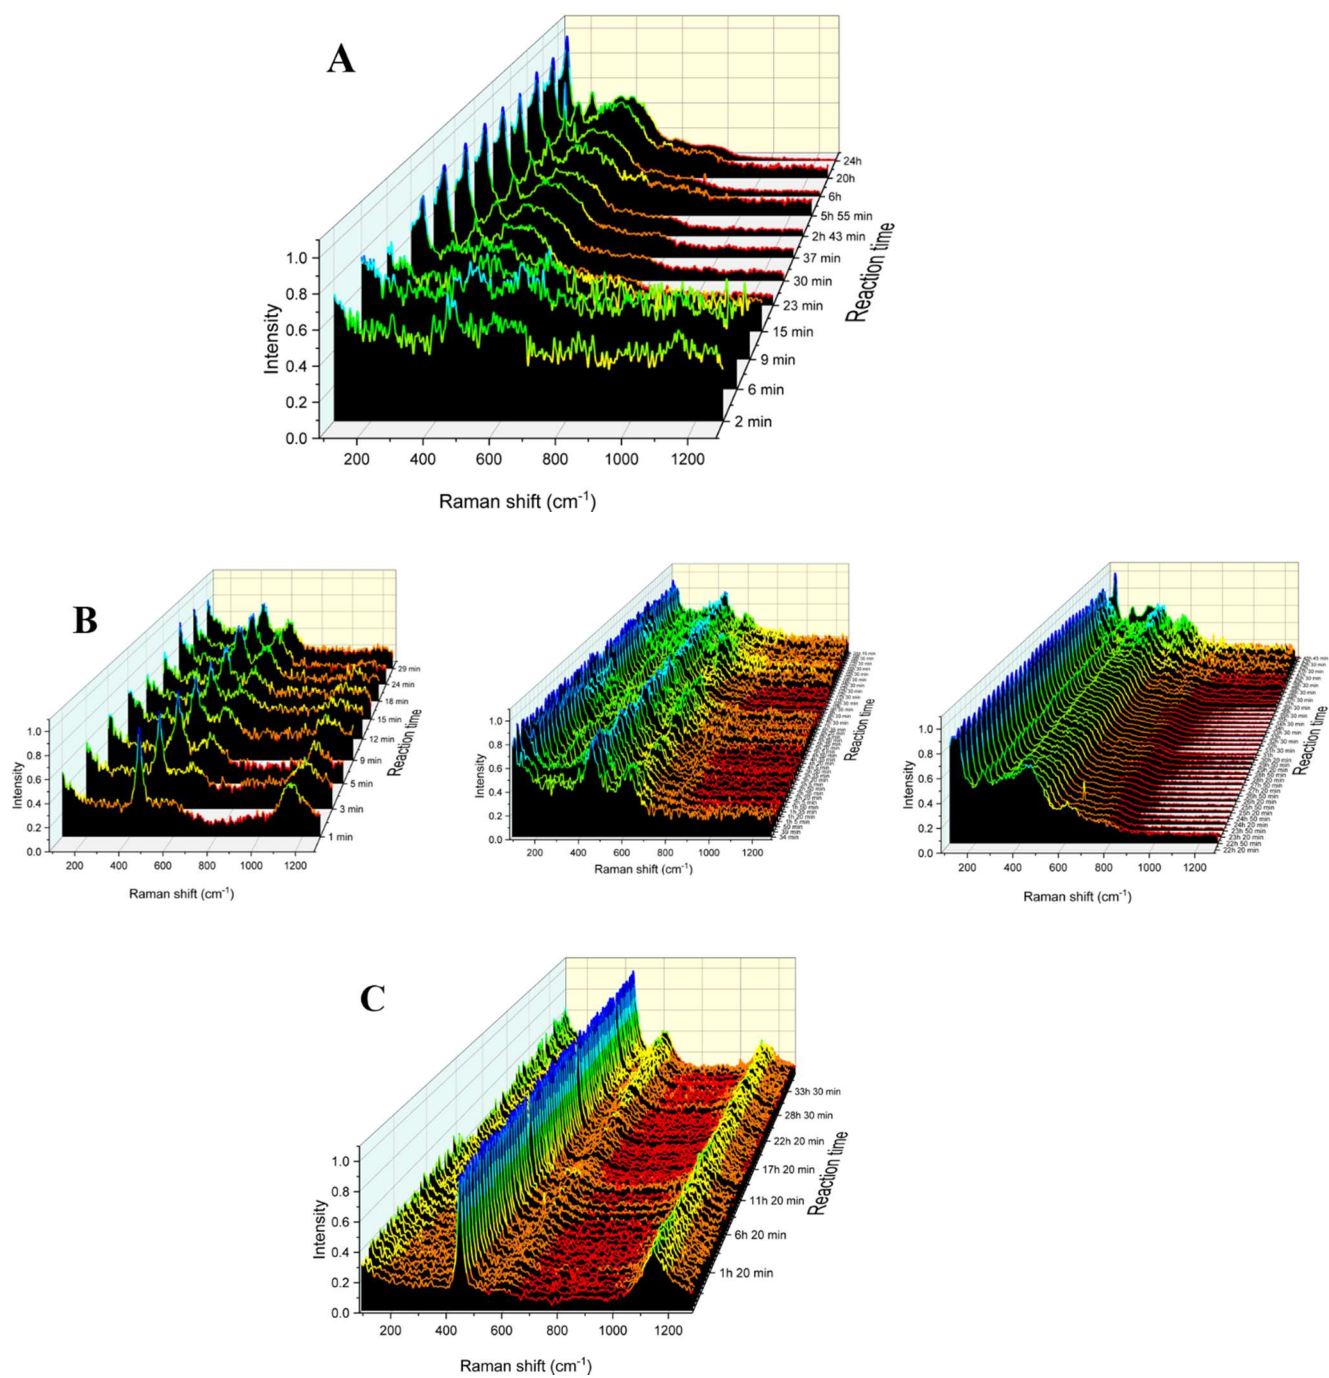


Figure S4. Raman spectra obtained at 0.1% of O_2 at 400°C (A), 300 °C (B) and 200 °C (C).