

Supplemental Material for:
**Rejuvenation engineering in metallic glasses by complementary
stress and structure modulation**

D. Şopu^{1,2,*}, F. Spieckermann^{3,†}, X.L. Bian^{4,‡}, S. Fellner¹, J. Wright⁵,
M. Cordill¹, C. Gammer¹, G. Wang⁴, M. Stoica⁵, and J. Eckert^{1,3}

¹*Erich Schmid Institute of Materials Science,*

Austrian Academy of Sciences, Jahnstraße 12, A-8700 Leoben, Austria

²*Institut für Materialwissenschaft, Fachgebiet Materialmodellierung,*

Technische Universität Darmstadt, Otto-Berndt-Straße 3, D-64287 Darmstadt, Germany

³*Department of Materials Science, Chair of Materials Physics,*

Mountainuniversität Leoben, Jahnstraße 12, A-8700 Leoben, Austria

⁴*Laboratory for Microstructures, Institute of Materials,*

Shanghai University, 200444, Shanghai, China

⁵*European Synchrotron Radiation Facility (ESRF), 38042 Grenoble, France*

⁶*Laboratory of Metal Physics and Technology,*

Department of Materials, ETH Zurich, 8093 Zurich, Switzerland

*Corresponding Author: daniel.sopu@oaew.ac.at

†Corresponding Author: florian.spieckermann@unileoben.ac.at

‡Corresponding Author: bianxilei@shu.edu.cn

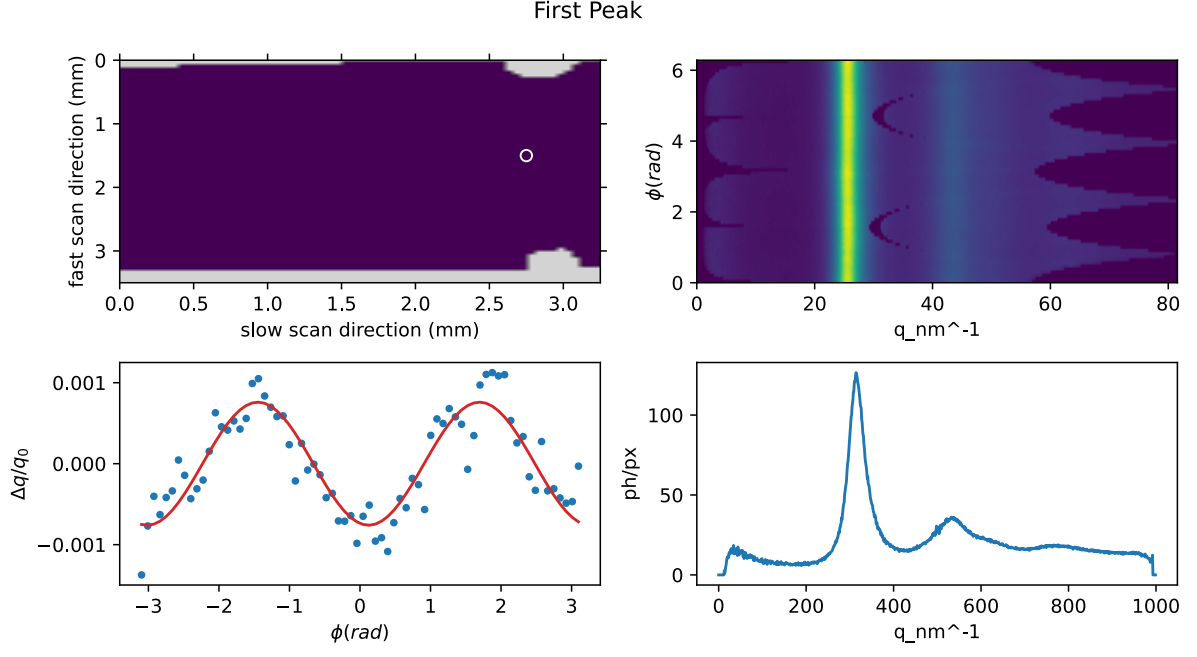


FIG. S1: Schematic representation of the strain evaluation from diffraction data. (a) Position of the beam on the sample, (b) azimuthal representation of the diffraction data, (c) fitting of q as a function of (ϕ) (d) azimuthally integrated diffraction data.