

Frequency dependent Lg and Pg wave attenuation in western Tibet

Chandrani Singh^{1*}, Ashwani Kant Tiwari², Eric Sandvol³,
Namrata Jaiswal¹, Niptika Jana⁴, Shirish Bose¹,
Arun Kumar Gupta⁵

^{1*}Department of Geology and Geophysics India, Indian Institute of
Technology Kharagpur, Kharagpur, 721302, West Bengal, India.

²Department of Earth and Environmental Sciences, Indian Institute of
Science Education and Research, Bhopal, 462066, Madhya Pradesh,
India.

³Department of Geological Sciences, University of Missouri, 610101,
Columbia, USA.

⁴Department of Applied Geophysics, Indian Institute of Technology
(Indian School of Mines) Dhanbad, City, Jharkhand, India.

⁵Ministry of Earth Sciences, India.

*Corresponding author(s). E-mail(s): chandrani@gg.iitkgp.ac.in;

1 This supplement file includes:

Figures S1 and S2.

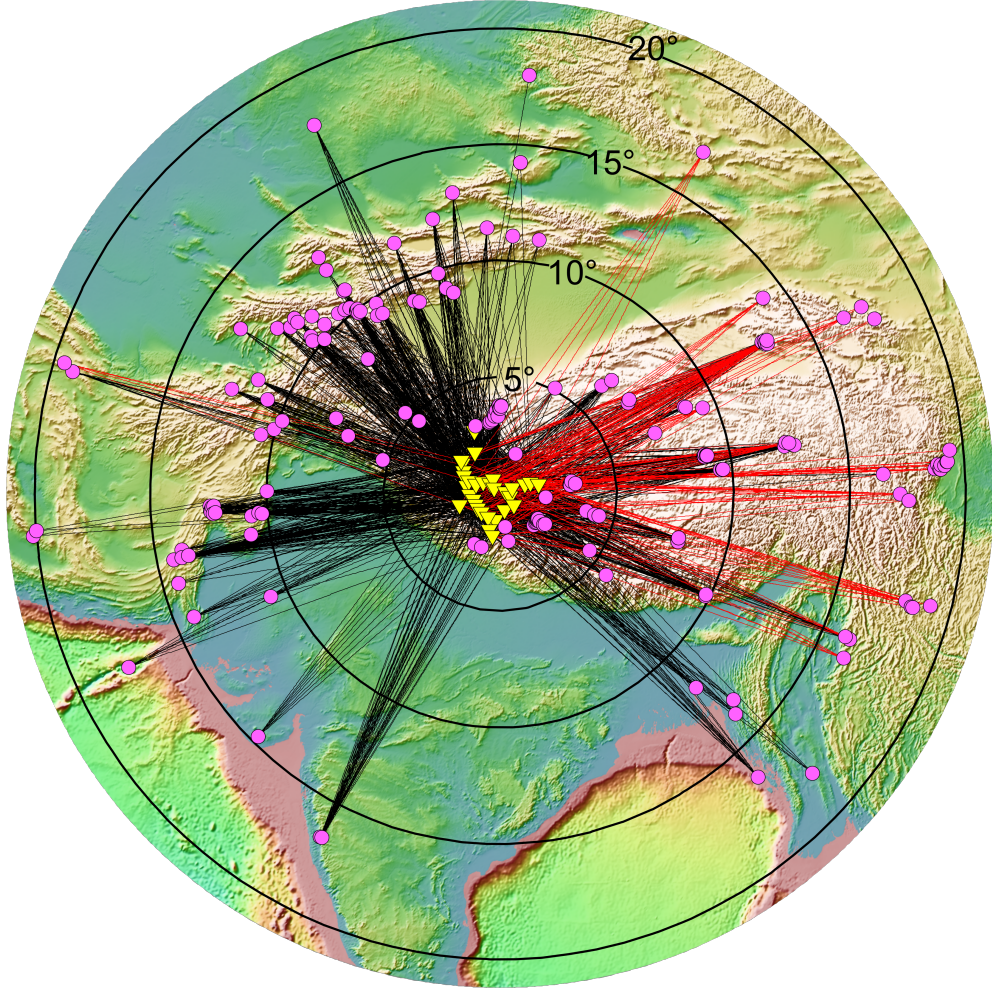


Fig. 1 Lg ray paths of different earthquake-station pairs. Black color corresponds to the efficient Lg paths, and red indicates the blocked paths. The western part is mostly dominated by the blocked paths.

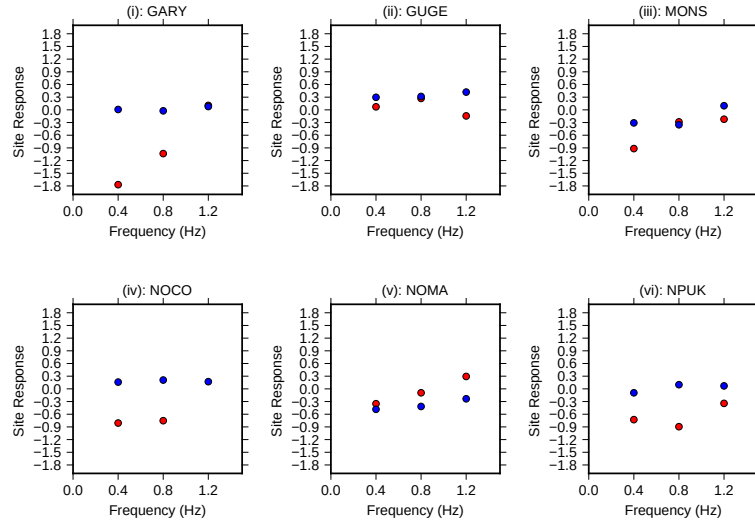


Fig. 2 Variations of relative site responses with frequency for different stations. Blue circles represents L_g and red circles represents P_g .