

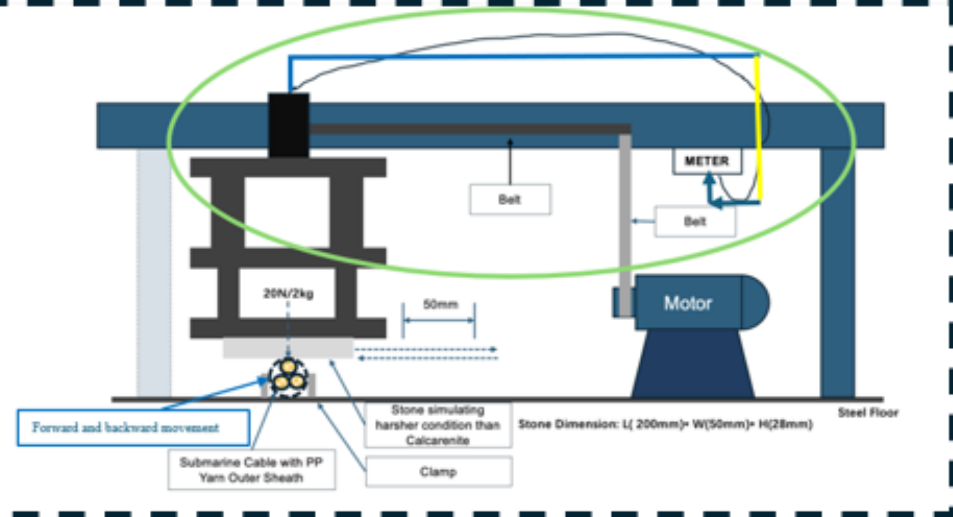


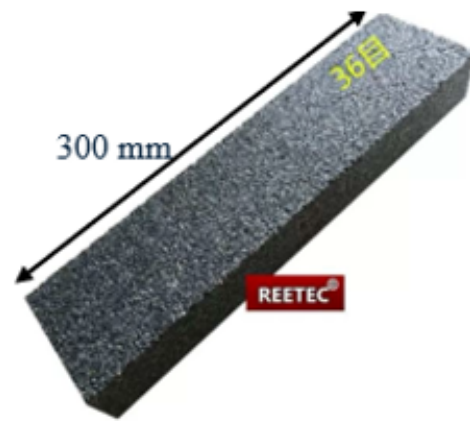


Sample preparation



Abrasive device : Test Set-up

Results and discussions

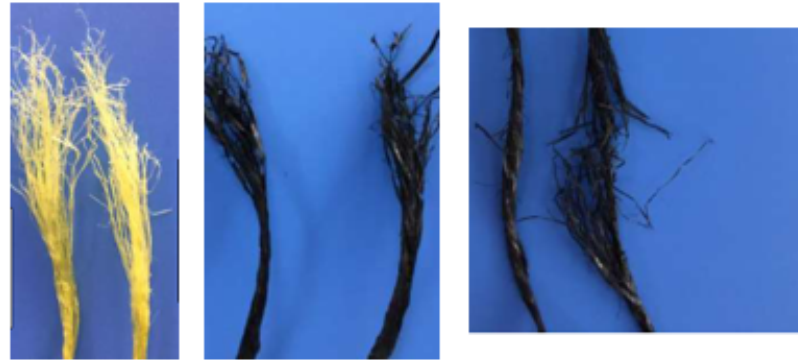

Friction and Pressure : Seabed friction coefficient of 0.35 and 20N

No of cycles: 15 mm longitudinally at 55 cycles per minute under 20 N load with 400 mm/s speed.

Temperature 20° to 30°

Dry operation condition