

Enhancing Electrode/Electrolyte Interface Stability in High-Voltage Sodium-Ion Batteries via an Anhydride Additive

Xiaohui Han^{1,2}, Siqi Tang^{1,2}, Hui Duan¹, Xinhai Li¹, Zhixing Wang¹, Huajun Guo¹, Jiexi Wang^{1,*}

¹School of Metallurgy and Environment, Central South University, Changsha, Hunan 410083, China

²R&D Department, Huizhou Highpower Technology Co., Ltd., Huizhou 516057, China

*Corresponding authors: wangjiexikeen@csu.edu.cn (Jiexi Wang)

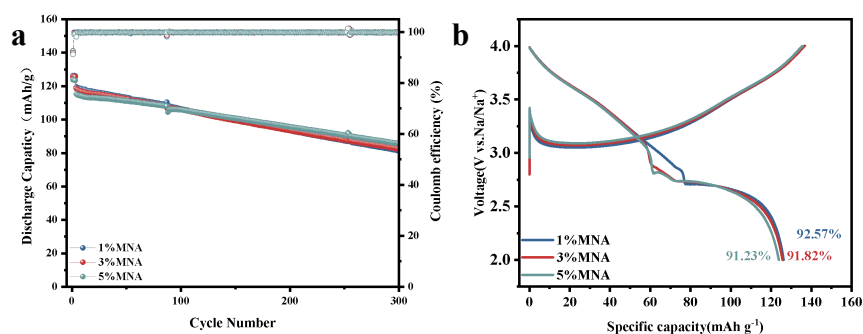


Figure S1. The cycling performance of Na//NFM batteries using different amount (1%/3%/5%) of MNA at 25 °C : (a) cycling performance, (b) the initial charge-discharge curves.

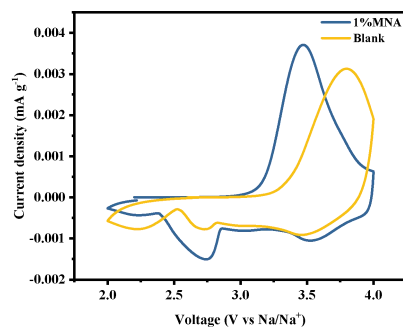


Figure S2. CV curves of Na//NFM batteries using electrolytes with and without MNA..

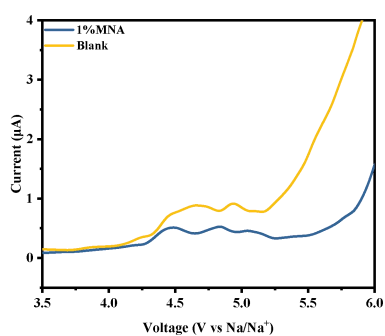


Figure S3. LSV curves of sodium metal batteries using electrolytes with and without MNA.