

## A Directed inventory recovery

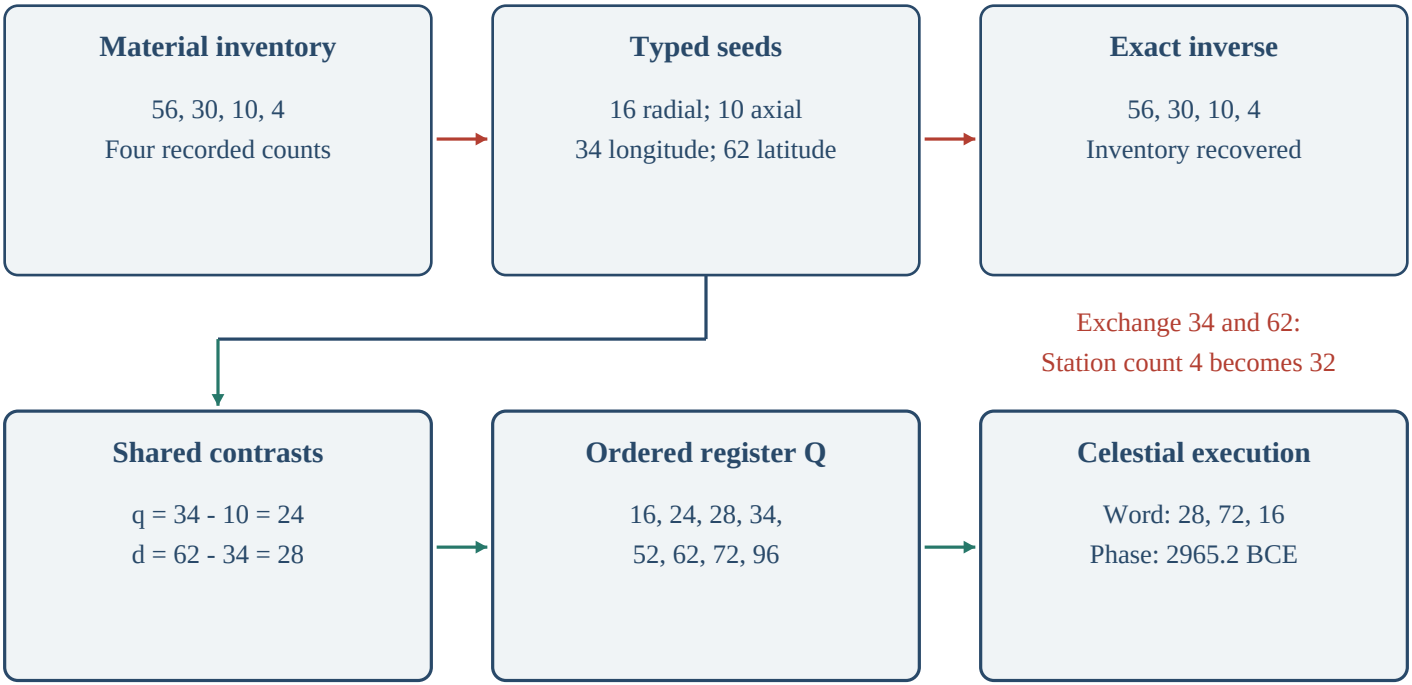


Fixed J2000 spatial roles; separate model-conditioned temporal execution

## B Conditional uniqueness within the same compiler

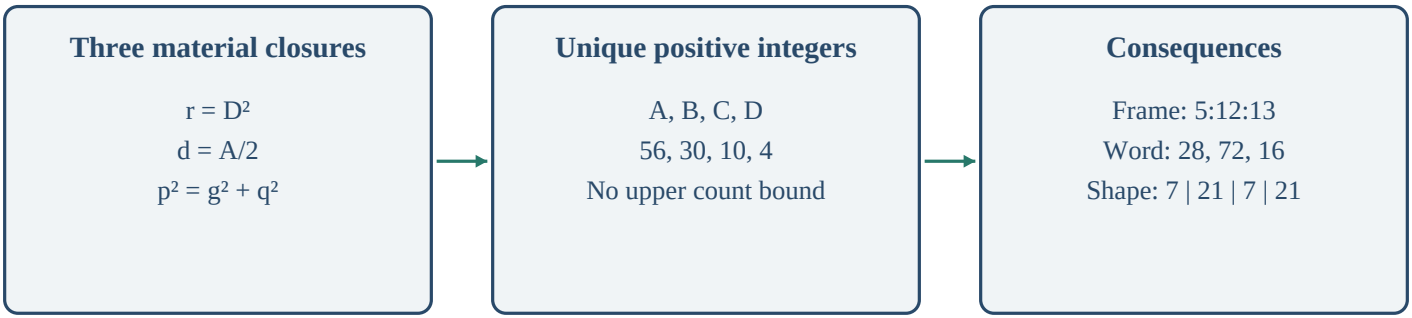


r=A-B-C; d=A+C-B-2D; p=A-B; g=C; q=B+D-C

Three closures determine one positive integer inventory within the stated compiler.

The resulting 7 | 21 | 7 | 21 partition describes the approximate Station shape.