

TITLE:

Go beyond the limits of Genetic Algorithm in daily covariate selection practice

Authors: D. Ronchi¹, E.M. Tosca¹, R. Bartolucci^{1,2}, P. Magni¹

Date: Received: data/ Accepted: date

1. Dipartimento di Ingegneria Industriale e dell'Informazione, Università degli Studi di Pavia, 27100 Pavia, Italy
2. Clinical Pharmacology & Pharmacometrics, Janssen Research & Development, Beerse, Belgium

Corresponding author:

Paolo Magni paolo.magni@unipv.it

Supplementary Section 2

Projection in two dimensions with t-distributed stochastic neighbour embedding (t-SNE)¹ of population randomly generated and a population obtained by applying clustering initialization. The non-randomly initialized population has a lower spatial density because chromosomes are spaced further apart.

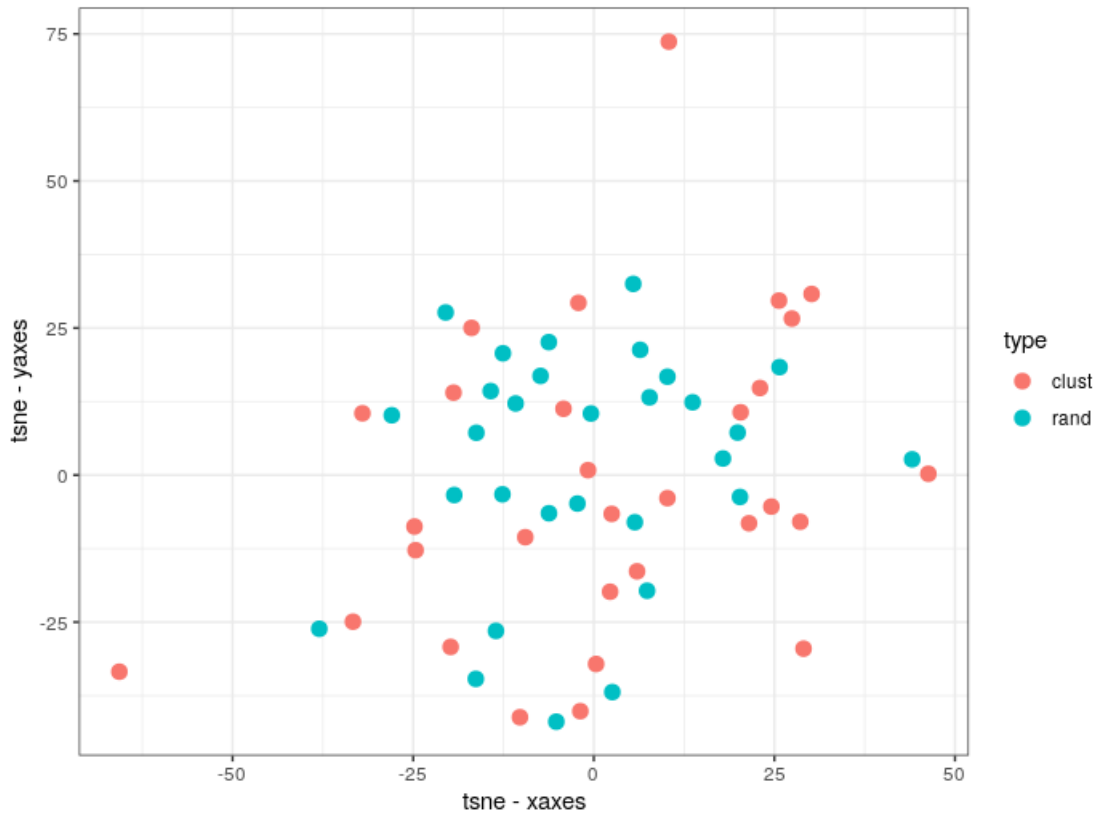


Fig. S2 tSNE of chromosome in initial population

1. Maaten, L. van der & Hinton, G. Visualizing Data using t-SNE. *J. Mach. Learn. Res.* **9**, 2579–2605 (2008).

