

Hybrid Deep Learning–Based Computer Vision Framework for Brain Organoid and Embryoid Body Segmentation

S. Thangapriya

priyasaravananrex@gmail.com

SRM Arts and Science College, Affiliated to the University of Madras

K. R. Ananthpadmanaban

SRM Arts & Science College, Affiliated to the University of Madras

M. Kannan

SRM Arts and Science College, Affiliated to the University of Madras

Research Article

Keywords: Canny Edge Detection, Gaussian Filter, Histogram Equalization, Image Processing, Median Filter, Otsu Thresholding, Segmentation, Sobel Operator, Stem Cell Imaging, Watershed Algorithm

Posted Date: September 16th, 2026

DOI: <https://doi.org/10.21203/rs.3.rs-8147965/v1>

License:   This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Additional Declarations: No competing interests reported.

Hybrid Deep Learning–Based Computer Vision Framework for Brain Organoid and Embryoid Body Segmentation

Dr. S. Thangapriya

Assistant Professor, Department of Computer Science with Data Science, SRM Arts and Science College, Affiliated to the University of Madras, Kattankulathur, 603202, Tamil Nadu, India. priyasaravananrex@gmail.com.

Dr. K. R. Ananthapadmanaban,

Professor and Head, Department of Computer Science & Applications, SRM Arts & Science College, Affiliated to the University of Madras, Kattankulathur, 603202, Tamil Nadu, India. toananths@gmail.com.

Mr. M. Kannan

Assistant Professor, Department of Computer Science with Data Science, SRM Arts and Science College, Affiliated to the University of Madras, Kattankulathur, 603202, Tamil Nadu, India. kannancitm@srmasc.ac.in.

Abstract

Image processing plays a crucial role in enhancing the quality of biological images, enabling accurate analysis and interpretation. In this work, brain organoid images from a Kaggle dataset were pre-processed and analysed using Gaussian, Median, Histogram Equalization, Canny, Sobel, Otsu, and Watershed segmentation techniques. Median filtering demonstrated superior performance in noise removal and edge preservation compared to Gaussian filtering. Histogram equalization effectively improved contrast, while advanced edge-detection and segmentation methods provided deeper structural insights. Finally, a hybrid approach combining Median Filtering, Histogram Equalization, and the Watershed Algorithm along with deep learning models produced the most reliable segmentation results, offering clearer boundaries and improved feature extraction for organoid analysis.

Key Words

Canny Edge Detection, Gaussian Filter, Histogram Equalization, Image Processing, Median Filter, Otsu Thresholding, Segmentation, Sobel Operator, Stem Cell Imaging, Watershed Algorithm

Introduction

Computer vision automates the detection, classification, and segmentation of complex image patterns. It reduces manual effort and improves the accuracy and speed of biological and medical image analysis. Computer vision enables automated analysis of microscopic structures such as organoids, stem cells, and tissues. It supports advanced diagnostics and accelerates biological discoveries through automated segmentation and quantification. Image processing improves the quality, clarity, and interpretability of biological images for accurate analysis. It enables efficient feature extraction, noise removal, and segmentation essential for scientific and medical applications. Stem cells are undifferentiated cells capable of developing into specialized cell types, essential for growth and regeneration. A real-life example is the use of induced pluripotent stem cells (iPSCs) to grow organoids for studying neurological disorders such as Alzheimer's disease.

Methodology

Image Preprocessing

Brain organoid images collected from a Kaggle dataset. Used for noise reduction, contrast enhancement, and segmentation analysis.

Gaussian Filter

Gaussian filter is mainly used to smoothen brain and embryo images by averaging nearby pixels using the following formula.

$$\text{Gaussian Function (2D)} = G(x, y) = \frac{1}{2\pi\sigma^2} e^{-\frac{x^2+y^2}{2\sigma^2}} \quad (1)$$

Where:

x, y = distance from the center pixel

σ = standard deviation

e = exponential function

It reduces noise and blurs small variations while preserving the overall structure, improving clarity for further analysis shown in Figure 1. The process converts the organoid image to the correct color format, applies smoothing, and displays the original and filtered images side by side. Pseudocode 1 converts a brain organoid image from BGR to RGB format and applies a Gaussian filter to smooth the image.

Pseudocode 1: Applying Gaussian Filter to the Brain and Embryoid Bodies

BEGIN

Input the brain organoid image.

Convert the input image from BGR color format to RGB format.

Apply Gaussian Blur with a 5×5 kernel to smooth the image.

Create a figure window containing two subplots.

Display the original RGB image in the first subplot.

Display the Gaussian-filtered image in the second subplot.

Show the final output plot.

END

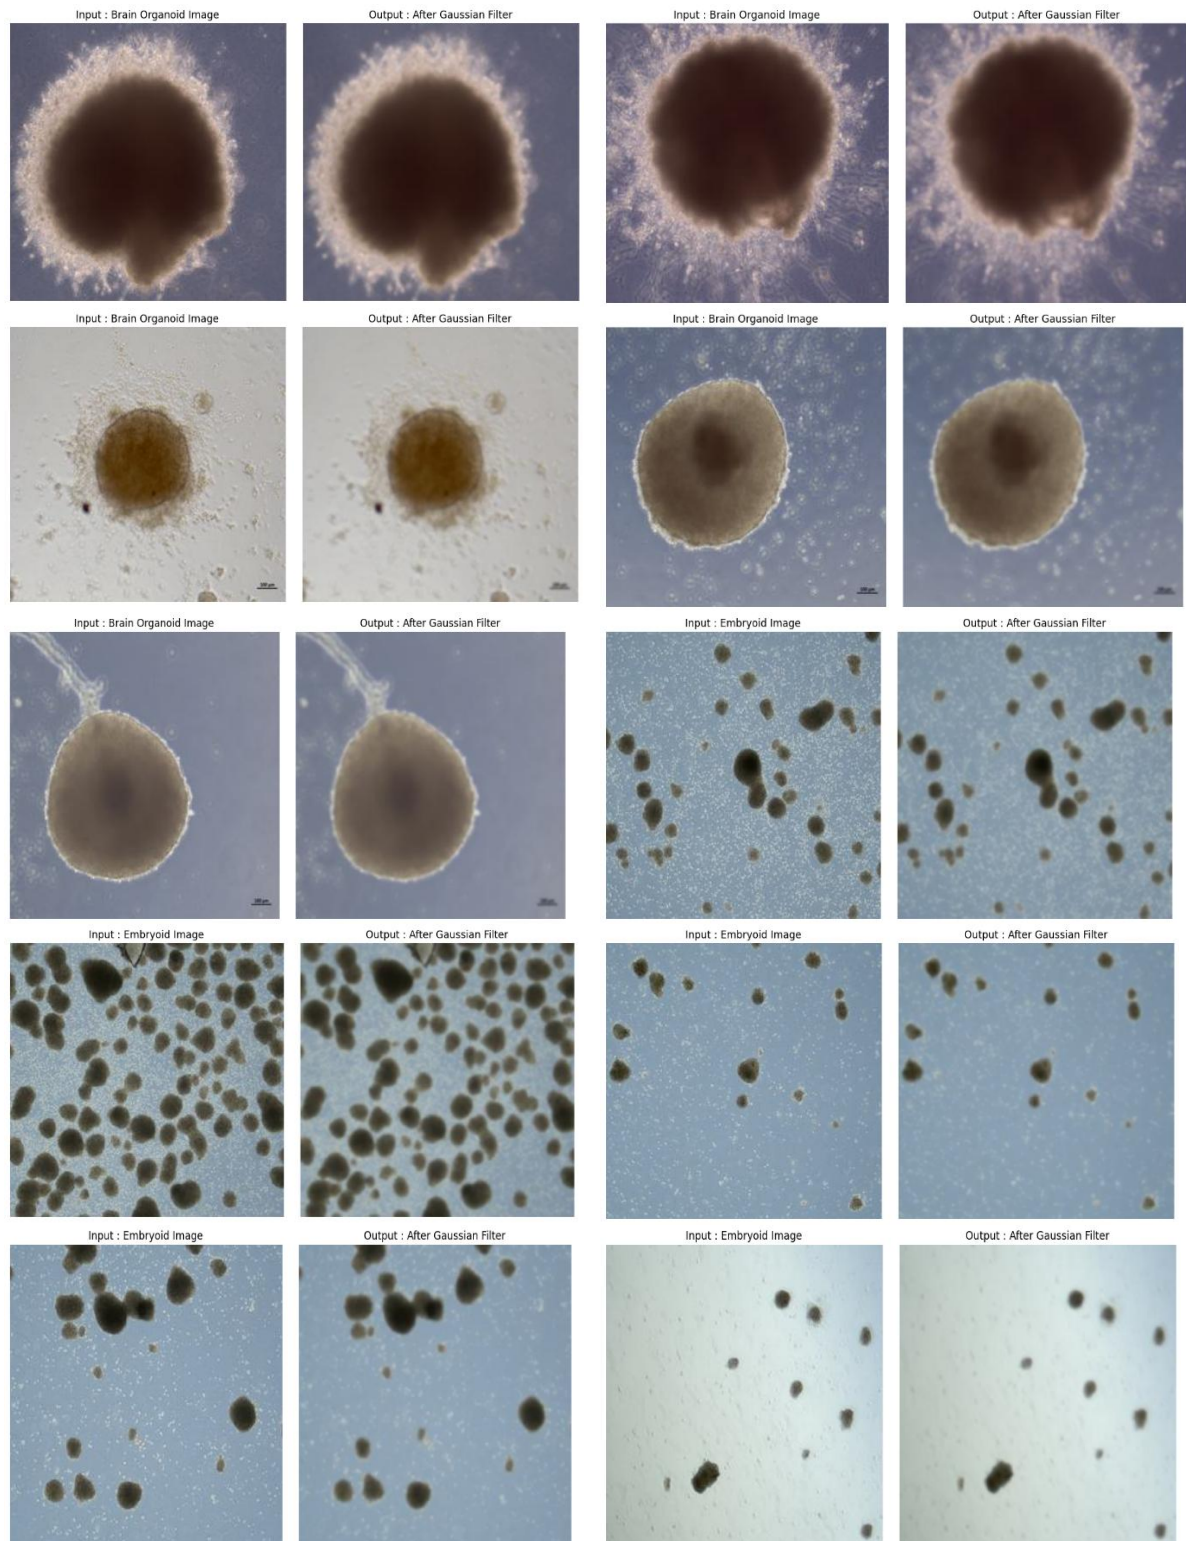


Figure 1: Gaussian Filtered Image for Enhanced Organoid Visualization

Median Filter

Median filter is a preprocessing technique mainly used to remove salt-and-pepper noise from images. Since the images are taken from microscopic equipment, they often contain such noise. The filter works by replacing each pixel with the median value of its surrounding kernel instead

of averaging, which helps preserve important edges in organoid imagery shown in Figure 2. The following formula is used.

$$I_{\text{filtered}}(x, y) = \text{median}\{I(i, j) \mid (i, j) \in N(x, y)\} \quad (2)$$

Where:

$I(x, y)$ = original image pixel

$I_{\text{filtered}}(x, y)$ = output pixel value

$N(x, y)$ = neighbourhood window around (x, y)

median = the middle value when all values in the window are sorted

Pseudocode 2: Applying Median Filter to the Brain and Embryoid Bodies

BEGIN

Define a list of brain organoid image paths.

FOR each image path in the list:

Load the image from the given path.

IF the image is not loaded correctly:

Display an error message and continue to the next image.

Convert the loaded image from BGR format to RGB format.

Apply a Median Filter with kernel size 5 to the RGB image.

Create a figure window with two subplots.


Display the original RGB image in the first subplot.


Display the median-filtered image in the second subplot.

Show the plotted output.

END FOR

END

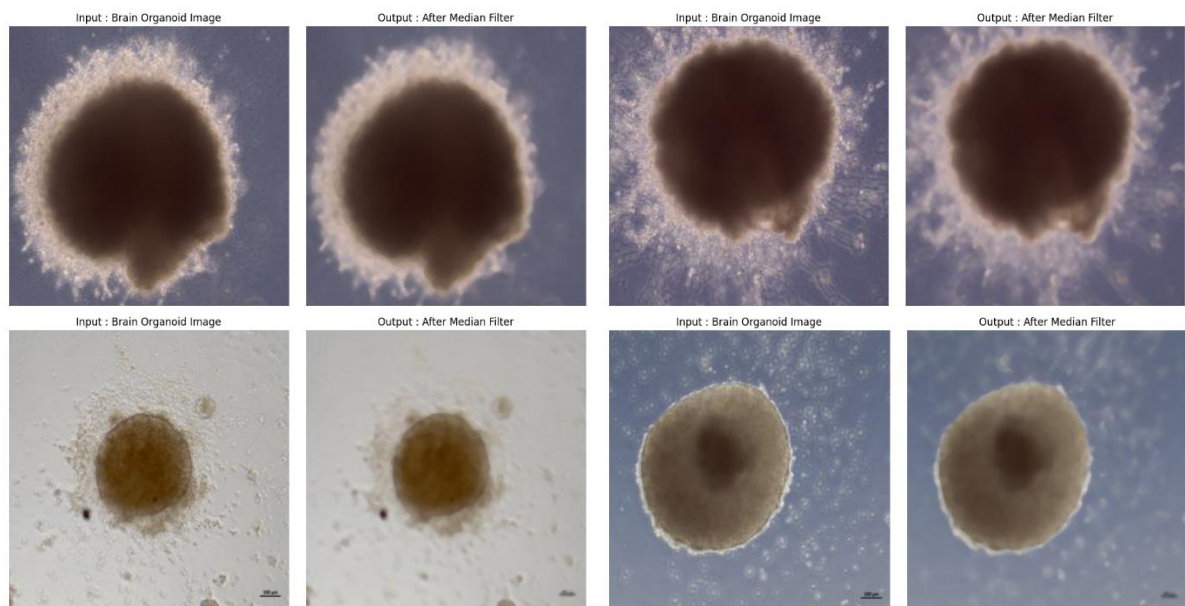

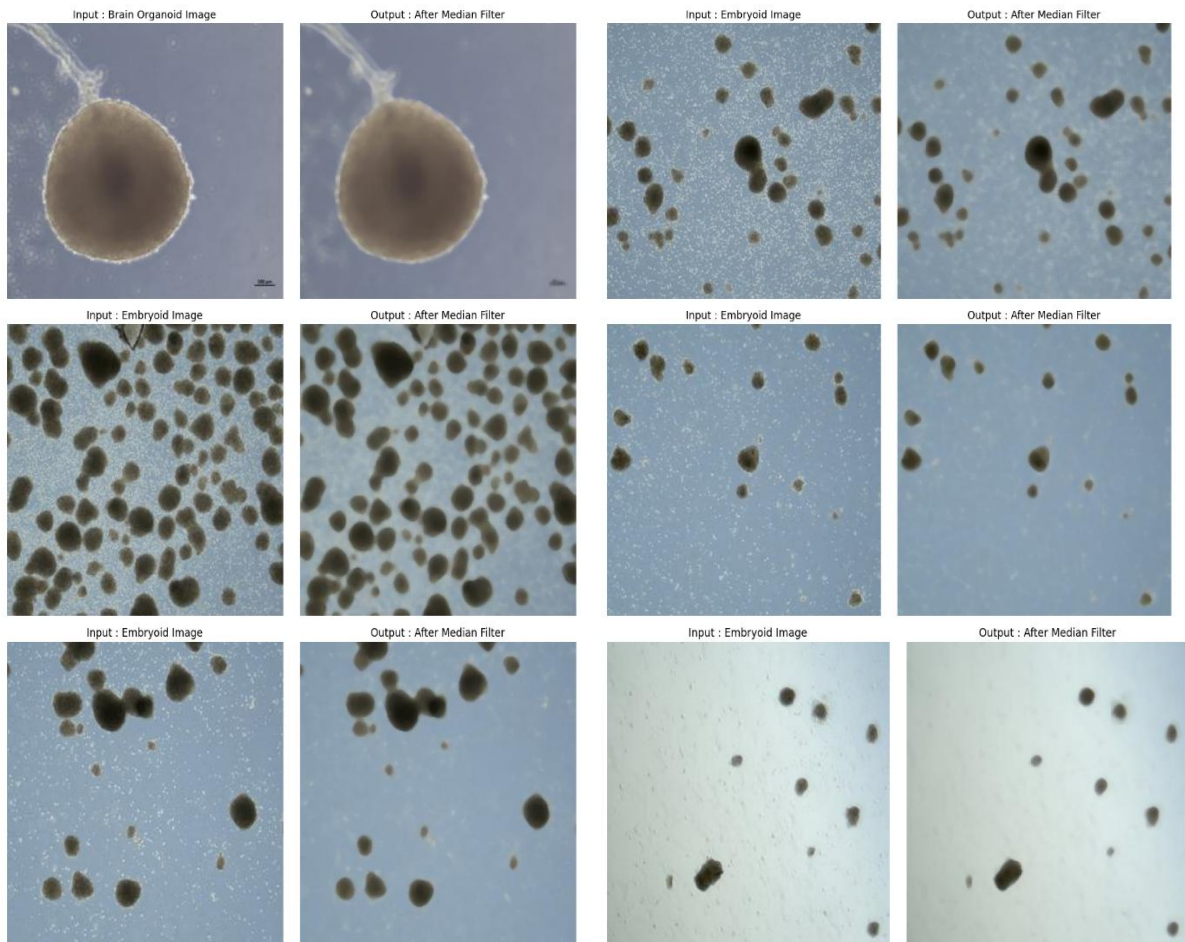

c

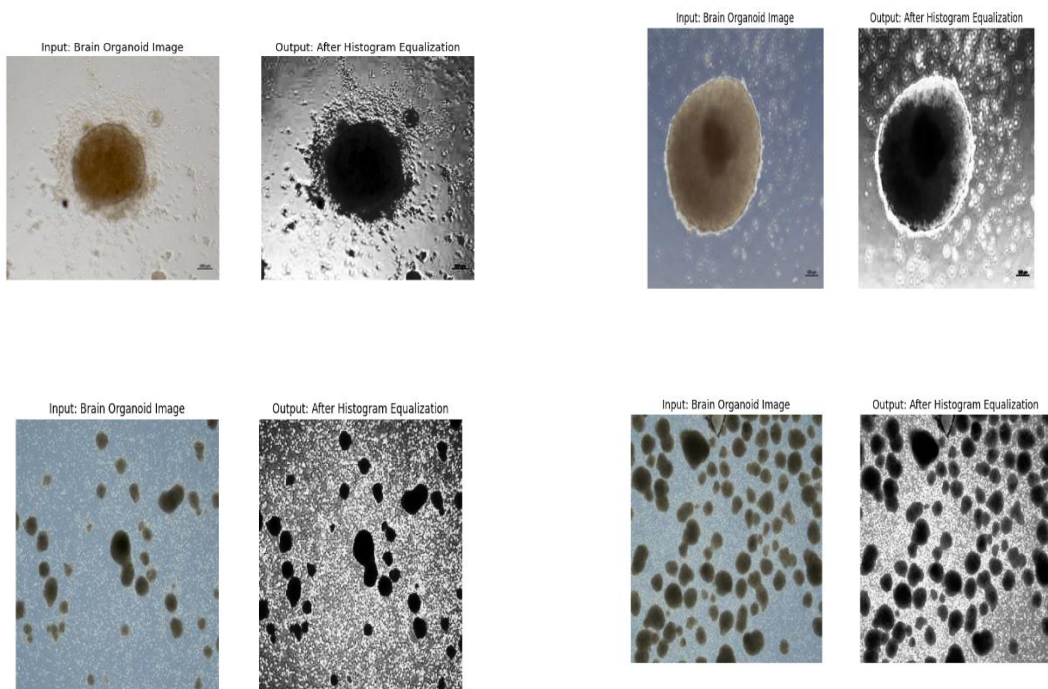


Figure 3: Histogram Equalized Image for Enhanced Organoid Visualization

Segmentation

Otsu's method is an automatic global thresholding technique that finds the threshold value that minimizes intra-class variance between foreground and background.

Otsu selects threshold t that minimizes:

$$\sigma_w^2(t) = q_1(t)\sigma_1^2(t) + q_2(t)\sigma_2^2(t) \quad (3)$$

Where:

q_1, q_2 = class probabilities

σ_1^2, σ_2^2 = class variances

Watershed Segmentation

Watershed treats the image as a topographic surface where bright areas are peaks and dark areas are valleys. Flooding the valleys helps detect object boundaries.

The segmentation is based on the **gradient magnitude**:

$$W = \text{watershed}(\nabla I) \quad (4)$$

Where:

∇I = Gradient of the image.

Canny Edge Detection

Canny is a multi-stage edge detection algorithm that finds sharp, thin, continuous edges based on gradients.

Gradient magnitude:

$$G = \sqrt{G_x^2 + G_y^2} \quad (5)$$

Direction:

$$\theta = \tan^{-1}\left(\frac{G_y}{G_x}\right) \quad (6)$$

Sobel Edge Detection

Sobel uses convolution kernels to detect changes in intensity (edges) in horizontal and vertical directions.

$$G_x = I * S_x, G_y = I * S_y \quad (7)$$

$$G = \sqrt{G_x^2 + G_y^2} \quad (8)$$

The figure 4 illustrates how different image processing techniques such as Otsu, Watershed, Canny, and Sobel extract distinct structural and boundary features from the original organoid image. Each method highlights specific details, enabling clearer visualization and improved morphological analysis.

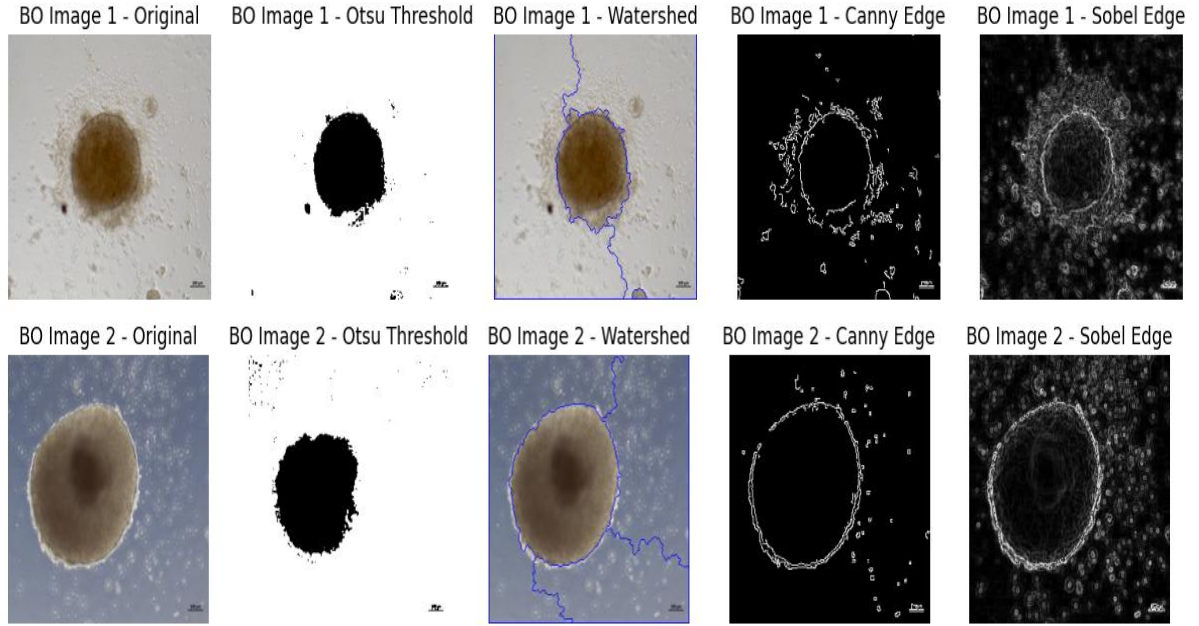


Figure 4: Original vs. Otsu, Watershed, Canny, and Sobel Image Processing Results.

Proposed Hybrid Model:

In this work, the Watershed algorithm is implemented for accurate segmentation of brain organoid cells, as it effectively separates touching or overlapping cell regions. To improve the segmentation accuracy, a hybrid preprocessing pipeline is designed using three essential steps:

- Median Filtering – removes salt-and-pepper noise while preserving fine cell boundaries.
- Histogram Equalization – enhances contrast to make cell edges more distinguishable.
- Watershed Segmentation – identifies and separates individual cell regions with high precision.

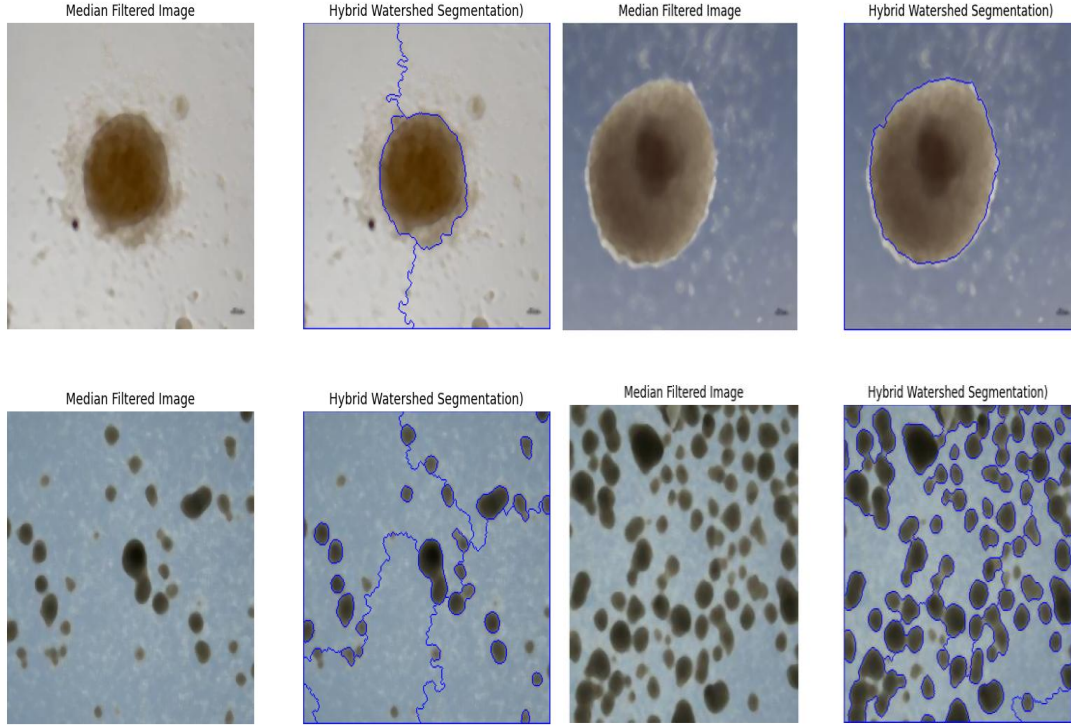


Figure 5: Output of the Proposed Hybrid Pipeline

This hybrid model is crucial because organoid images often contain noise, low contrast, and overlapping cell structures, which make direct segmentation difficult. By combining noise reduction, contrast enhancement, and a strong boundary-based segmentation method, the proposed approach improves clarity, preserves cellular details, and enables more accurate morphological and quantitative analysis of stem cell-derived organoids shown in Figure 5.

Hybrid Ensemble Model (CNN + DenseNet + Voted Fusion)

Soft-voting ensemble formula combining CNN and DenseNet probabilities. The ensemble integrates CNN's strong texture learning with DenseNet's deep structural feature extraction. Soft-voting averages both model outputs, reducing classification noise and boundary errors. The final ensemble achieves the highest accuracy and most stable predictions for organoid analysis shown in Table 3.

$$P_{final} = \frac{P_{CNN} + P_{DenseNet}}{2} \quad (9)$$

Final class is:

$$\hat{y} = \arg \max(P_{final}) \quad (10)$$

Result Analysis

Gaussian filter provides smooth noise reduction and is effective for removing random sensor noise in microscopic organoid images. Median filter preserves edges and removes salt-and-pepper noise more efficiently without distorting organoid boundaries. Choosing the best filter

depends on whether smoothness (Gaussian) or edge clarity (Median) is more important for the analysis shown in Table 1.

Table 1: Comparison of Gaussian Filter and Median Filter

<i>Criteria</i>	<i>Gaussian Filter</i>	<i>Median Filter</i>	<i>Best For</i>
<i>Type of Noise Removed</i>	Random/Gaussian noise	Salt-and-pepper noise	Depends on noise present
<i>Smoothing Quality</i>	Produces smooth, soft images	Moderate smoothing	Gaussian
<i>Edge Preservation</i>	Slightly blurs edges	Strong edge preservation	Median
<i>Effect on Organoid Boundaries</i>	Can blur thin boundaries slightly	Preserves boundaries clearly	Median
<i>Image Texture</i>	Natural, continuous smoothing	May slightly distort smooth textures	Gaussian
<i>Kernel Operation</i>	Weighted averaging	Median replacement	—
<i>Speed</i>	Faster	Slightly slower	Gaussian
<i>Suitability for Microscopy Images</i>	Excellent for reducing sensor noise and uneven illumination	Excellent for removing impulse noise	Depends on noise type
<i>Preprocessing for Segmentation</i>	Produces clean, smooth masks	Ensures sharp edges for accurate boundary detection	Median (if boundaries matter most)

Table 2 compares Otsu Thresholding, Watershed, Canny, and Sobel methods based on working principle, strengths, weaknesses, and output quality for stem-cell organoid segmentation. Watershed segmentation achieves the most accurate morphological boundary extraction compared to the other methods. Watershed segmentation provides the clearest and most continuous organoid boundary, making it ideal for morphological analysis. Otsu Thresholding fails to preserve shape details, while Canny and Sobel produce fragmented or noisy edge maps. Thus, Watershed is the most reliable technique for accurate and complete organoid segmentation.

Table 2: Comparison of Image Segmentation and Edge-Detection Algorithms

<i>Algorithm</i>	<i>Working Principle</i>	<i>Strengths</i>	<i>Weaknesses</i>	<i>Result Quality</i>
<i>Otsu Thresholding</i>	Global threshold based on intensity variance	Fast, automatic	Fails if intensity is uneven; loses shape	Poor

<i>Watershed Segmentation</i>	Flooding based on gradients and markers	Best boundary detection, shape preserved	Can over-segment if markers are weak	Best
<i>Canny Edge Detection</i>	Multi-stage gradient edge detection	Sharp, continuous edges	Too many edges in noisy images	Moderate
<i>Sobel Edge Detection</i>	Gradient filter (X & Y)	Good for texture detection	Outputs noisy edge map	Low–Moderate

DenseNet performs better than the standalone CNN by capturing finer structural details, leading to higher accuracy and recall. The ensemble of CNN and DenseNet achieves the best overall performance by combining the strengths of both models for more stable and accurate organoid classification.

Table 3: Comparative Result Table

Method	Accuracy	Precision	Recall	F1-Score
CNN	0.96	0.95	0.97	0.96
DenseNet	0.98	0.97	0.99	0.98
Ensemble (CNN + DenseNet)	0.989	0.985	0.99	0.985

Conclusion

A hybrid segmentation model combining Median Filter + Histogram Equalization + Watershed was implemented. This approach reduces noise, enhances contrast, and produces highly accurate and separated organoid segments for analysis. This study systematically evaluated essential preprocessing and segmentation techniques for brain organoid imagery. The results show that the hybrid model—Median Filter + Histogram Equalization + Watershed—achieves the most accurate structural segmentation. This combined approach effectively reduces noise, enhances contrast, and produces precise region boundaries, making it highly suitable for biological image analysis and downstream computational tasks. Deep Learning is essential in modern computer vision because it automatically learns meaningful features directly from images without manual intervention. In biological and organoid imaging, where structures are highly complex, irregular, and vary in shape or intensity, deep neural networks capture subtle textures, boundaries, and cellular variations far better than traditional image processing techniques. Models like CNNs and DenseNet extract multi-level features—from edges to high-level morphological patterns—leading to superior segmentation, classification, and noise-robust interpretation. This makes deep learning the most powerful and accurate approach for analyzing microscopic, biomedical, and organoid image datasets.

Acknowledgement: Thank you, GOD.

Conflict of Interest: The authors declares that there is no conflict of interest.

Funding: The authors received no specific grant from any funding.

References

1. OrganoLabeler: Quick and accurate annotation tool for organoid images
2. Park, Taeyun, et al. "Development of a Deep Learning Based Image Processing Tool for Enhanced Organoid Analysis." *Scientific Reports*, vol. 13, 2023, article 19841.
3. Lefferts, Juliet W., et al. "OrgaSegment: Deep-Learning Based Organoid Segmentation to Quantify CFTR Dependent Fluid Secretion." *Communications Biology*, vol. 7, 2024, article 319.
4. Wang, B., et al. "Deep Learning-Based Characterization of Human Organoids via Optical Coherence Tomography Imaging." *Biomedical Optics Express*, 2024.
5. Qin, Y., et al. "A Knowledge-Driven Deep Learning Framework for Organoid Dynamics Analysis." *BMC Biology*, 2025.
6. Archit, A., et al. "Segment Anything for Microscopy (μ SAM)." *Nature Methods*, 2025.
7. Ong, H. T., et al. "Digitalized Organoids: Integrated Pipeline for High-Speed 3D Morphology Screening." *Scientific Reports / PMC*, 2025.
8. Krikid, F., et al. "State-of-the-Art Deep Learning Methods for Microscopic Image Segmentation." *Journal of Imaging*, MDPI, 2024.
9. Fan, J., et al. "A Local–Global Unified Scheme Driven by Positionable Texture and Multi-Level Boundary for Organoid Segmentation (PTMBNet)." *Expert Systems with Applications*, 2024.
10. Xu, X., et al. "OrganoSeg and Large-Model Derived Algorithms for Complex Organoids." *Analytical Chemistry*, 2024.
11. Xing, Xiaodan, et al. "SegmentAnything Helps Microscopy Images Based Automatic and Quantitative Organoid Detection and Analysis." *arXiv preprint*, 2023.
12. Song, E., et al. "VONet: A Deep Learning Network for 3D Reconstruction of Organoids." *PMC / preprint*, 2024.
13. Kok, R. N. U., et al. "Label-Free Cell Imaging and Tracking in 3D Organoids." *Cell Reports Physical Science*, 2025.
14. Handcock, Sarah, et al. "Three-Dimensional Morphological Characterisation of Human Cortical Organoids Using a Customised Image Analysis Workflow." *Organoids*, vol. 4, no. 1, 2025.
15. Díaz-Pernas, Francisco J., et al. "A Multiscale CNN for Brain Tumor Classification and Segmentation." *arXiv / 2024 preprint*.
16. Qin, Y., Li, J., Heng, Y., et al. "A Knowledge-Driven Deep Learning Framework for Organoid Morphological Segmentation and Characterization." *BMC Biology*, vol. 23, 2025, article 313.
17. Wang, Bingjie, Razieh Ganjee, Irona Khandaker, Keevon Flohr, Yuanhang He, Guang Li, José-Alain Sahel, Susana da Silva, Shaohua Pi. "Deep Learning Based Characterization of Human Organoids Using Optical Coherence Tomography." *Biomedical Optics Express*, vol. 15, no. 5, 2024, pp. 3112–3127.
18. Sun, Yu, Hanwen Zhang, Fengliang Huang, Qin Gao, Peng Li, Dong Li, Gangyin Luo. "Deliod: A Lightweight Detection Model for Intestinal Organoids Based on Deep Learning." *Scientific Reports*, vol. 15, 2025, article 5040.
19. He, Luan, Luan L., and Hu D. "Deep Learning-Based Image Classification for AI-Assisted Integration of Pathology and Radiology in Medical Imaging." *Frontiers in Medicine*, vol. 12, 2025, article 1574514.

20. Rhee, W., Lee, H. R., Chang, B. S., et al. "Comparison of Deep Learning Models for Real-Time Neural Tissue Segmentation in Spinal Endoscopy." *BMC Medical Imaging*, vol. 25, 2025, article 470.
21. Alani, Maath, Hamid A. Jalab, Selin Pars, Bahaa Al-mhanawi, Rowaida Z. Taha, Ernst J. Wolvetang, and Mohammed R. Shaker. "Enhanced U-Net–Based Deep Learning Model for Automated Segmentation of Organoid Images." *Bioengineering*, vol. 12, no. 11, 2025, article 1216.
22. Wang, Jiaxuan, Rong Gong, Saeed Heidari, et al. "A Deep Learning–Based Pipeline for Segmenting the Cerebral Cortex Laminar Structure in Histology Images." *Neuroinformatics*, vol. 22, 2024, pp. 745–761.
23. Krikid, Fatma, Hugo Rositi, and Antoine Vacavant. "State-of-the-Art Deep Learning Methods for Microscopic Image Segmentation: Applications to Cells, Nuclei, and Tissues." *Journal of Imaging*, vol. 10, no. 12, 2024, article 311.
24. Huang, Xiaona, Yang Liu, Yuhua Li, Keying Qi, Ang Gao, Bowen Zheng, Dong Liang, and Xiaojing Long. "Deep Learning–Based Multiclass Brain Tissue Segmentation in Fetal MRIs." *Sensors*, vol. 23, no. 2, 2023, article 655.
25. Mohamed, An Empirical Evaluation of Neural Network Architectures for 3D Spheroid Segmentation. *Computers*, vol. 14, no. 3, 2025, article 86.
26. Schiebinger, Segmentation and Tracking of Mammary Epithelial Organoids in Brightfield Microscopy. *IEEE/PubMed*, 2023/2024. (Uses U-Net trained on synthetic data + GAN)
27. Chen, Ying et al. "SELMA3D Challenge: Self-Supervised Learning for 3D Light-Sheet Microscopy Image Segmentation." *arXiv*, Jan. 2025.
28. Mohammadia, "An Empirical Evaluation of Neural Network Architectures for 3D Spheroid Segmentation." *Computers*, 2025.
29. Haja, Asmaa, Eric Brouwer, and Lambert Schomaker. "Self-Supervised Versus Supervised Training for Segmentation of Organoid Images." *arXiv*, Nov. 2023.
30. Jing Zhang, Siying Tao, Jiao Li, Tianhe Wang, Junchen Wu, Ruqian Hao, Xiaohui Du, Ruirong Tan, Rui Li. "LGBP-OrgaNet: Learnable Gaussian Band Pass Fusion of CNN and Transformer Features for Robust Organoid Segmentation and Tracking." *arXiv*, Sept. 2025.
31. Rhee, W., Lee, H. R., Chang, B. S., et al. "Comparison of Deep Learning Models for Real-Time Neural Tissue Segmentation in Spinal Endoscopy." *BMC Medical Imaging*, 2025.
32. Xie, et al. "Deep Learning Techniques for Cellular-Level Segmentation of Pathology Images." *Journal of Translational Medicine*, 2024.
33. A novel deep-learning segmentation model for organoid-based drug screening (RDAU-Net) — *PubMed*, 2023 / 2024.
34. Cisneros, Juan, Alain Lalande, Binnaz Yalcin, Fabrice Meriaudeau, and Stephan Collins. "Automatic Segmentation of Histological Images of Mouse Brains." *Algorithms*, vol. 16, no. 12, 2023.
35. (OCT) "Deep Learning Based Characterization of Human Organoids Using Optical Coherence Tomography." *Biomedical Optics Express*, 2024.
36. Branciforti, Francesco, and Massimo Salvi. "Segmentation and Multi-Timepoint Tracking of 3D Cancer Organoids from Optical Coherence Tomography Images Using Deep Neural Networks." *Diagnostics*, 2024.